



*AURORE D40
Sur rail 230V*



*AURORE D40
DALI sur rail 230V*



*AURORE D52
Sur rail 230V*



*AURORE D52
DALI sur rail 230V*



*AURORE D52
Sur rail 48V*



*AURORE D60
Sur rail 230V*



*AURORE D60
DALI sur rail 230V*



*AURORE D82
Rail 230V*

AURORE *Track versions*







AURORE Track versions


Common characteristics

Range	Highly flexible downlight on track for general & accent lighting
Description	Rotation 355° - Adjustable 90° White finish RAL 9003 (other upon request)
LED characteristics	2700K - 3000K – 3500K – 4000K – 5000K 3 SDCM (standard version) – 2 SDCM (premium version) CRI>90 (standard version) CRI 95, R9 > 90 (premium version) UGR < 15 LED Engine 600 to 2000 lm
Optical beam	7° - 12° - 15° - 20° - 25° - 30° - 35° - Elliptic Special filter, honey comb upon request
Connection	Delivered with 0.50m cable
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

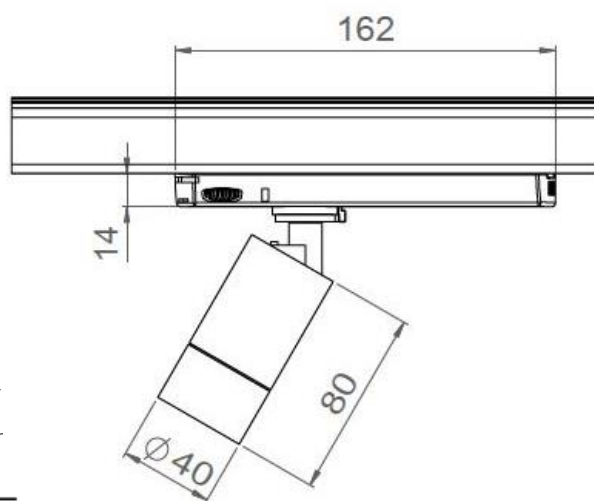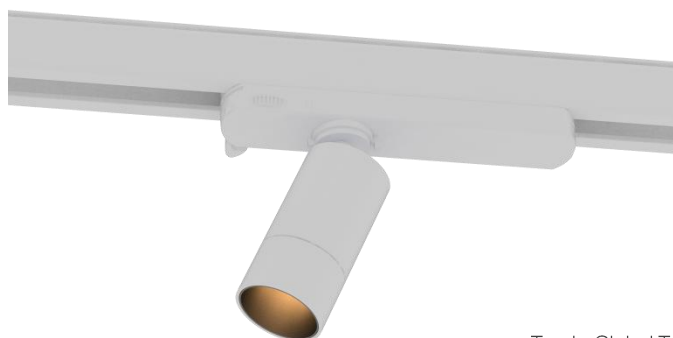

Track Global Trac PRO
Dimensions may vary by
a few mms from one
manufacturer to another

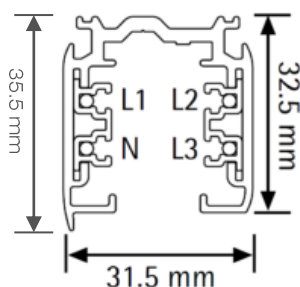

AURORE D40

Track version 230V

Dimensions	Diameter : 40mm
Net weight	0.20 kg
Luminous flux	300 lm to 800 lm
Power supply	Track adapter suitable for Global Trac PRO XTS or similar, ERCO, Trajectoire...
LED power	4W to 10W

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss

Last update : 04.03.2022


3/10

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

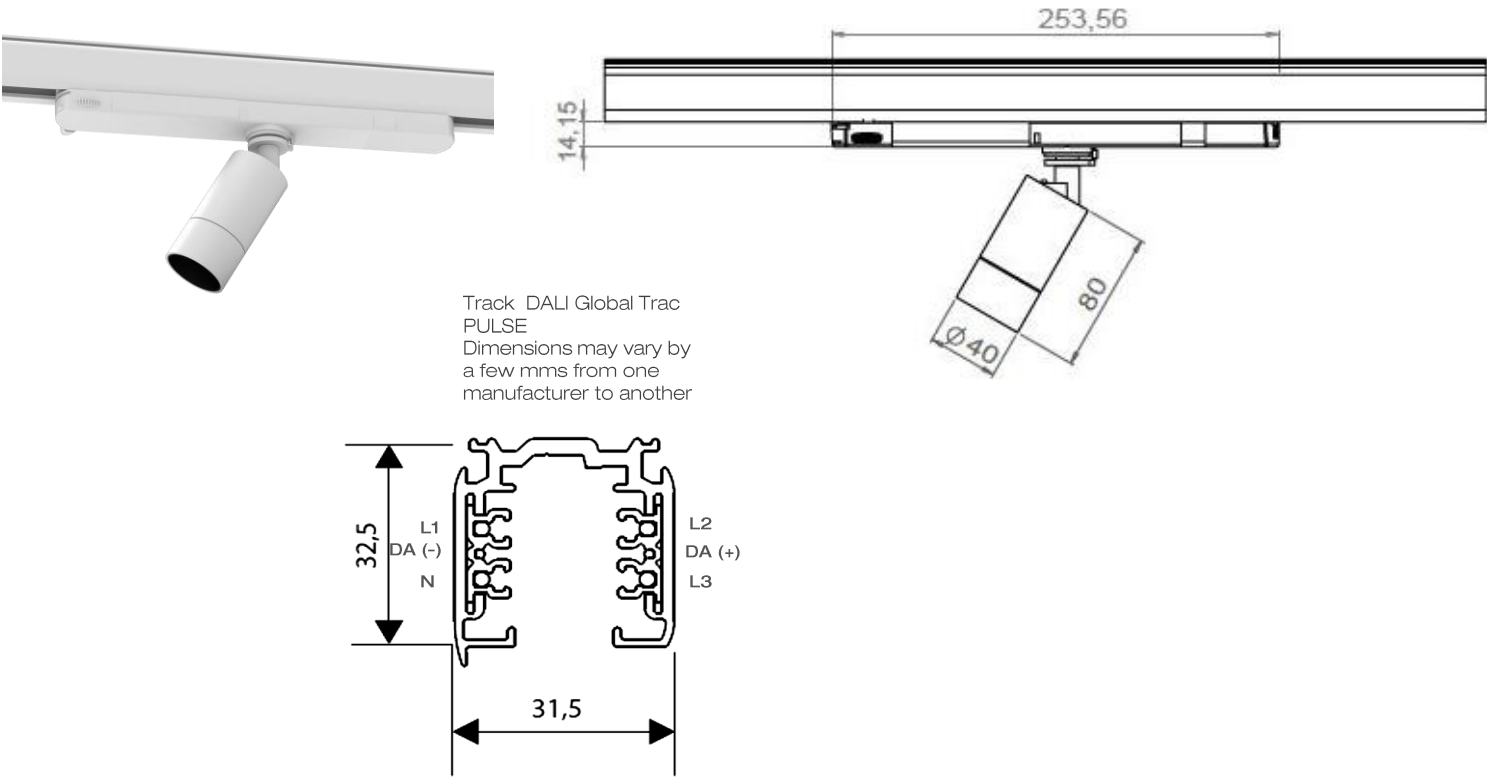


AURORE D40
DALI track version 230V

Dimensions	Diameter : 40 mm
Net weight	0.20 kg
Luminous flux	300 to 800 lm
Integrated power supply	Track adapter suitable for Global Trac Pulse, STUCCHI, SLV...
LED power	4W to 10W

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

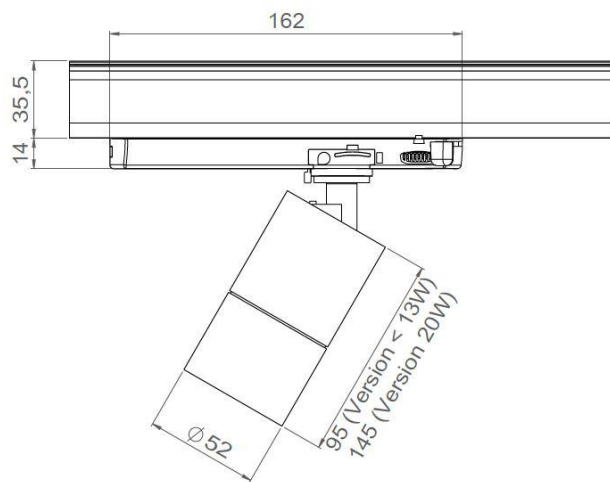

Track Global Trac pro
Dimensions may vary by
a few mms from one
manufacturer to another




AURORE D52


Track version 230V

Dimensions	Diameter : 52mm
Luminous flux	600 lm to 2000 lm
Net weight	0.50 kg
Integrated power supply	Track adapter suitable for Global Trac PRO XTS or simalar, ERCO, Trajectoire...
LED power	6W to 25W

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

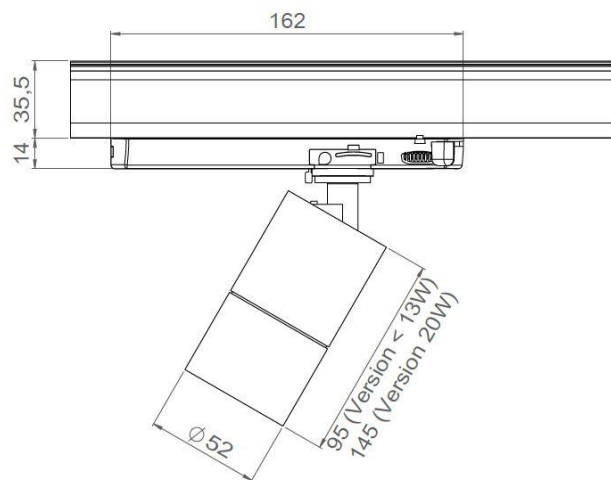

Track DALI Global Trac
pulse
Warning: Dimensions may
vary by a few mms from one
manufacturer to another

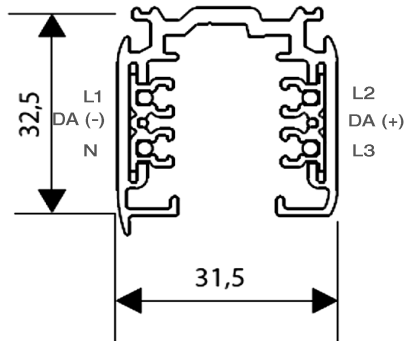

AURORE D52

DALI track version 230V

Dimensions	Diameter : 52mm
Luminous flux	600 lm to 2000 lm
Net weight	0.50 kg
Integrated power supply	Track adapter suitable for Global Trac Pulse, STUCCHI, SLV...
LED power	6W to 25W

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss

Last update : 04.03.2022


6/10

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

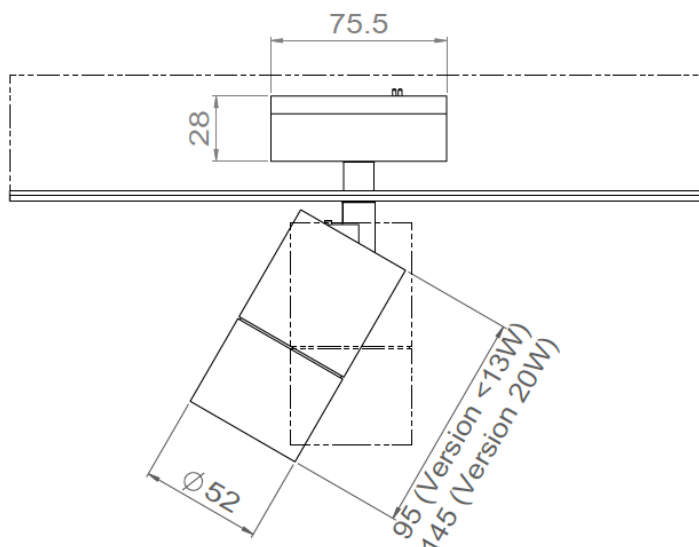

AURORE D52

48V Track version

Dimensions	Diameter : 52mm
Luminous flux	600 lm to 2000 lm
Net weight	0.50 kg
Power supply	Spot adaptator for 48V on track Power supply of 230V/48V to plan for the track
LED power	6W to 12W

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss

Last update : 04.03.2022

7/10

Firalux & LOuss brands



SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



Track DALI Global Trac
pro
Warning: Dimensions
may vary by a few mms
from one manufacturer
to another

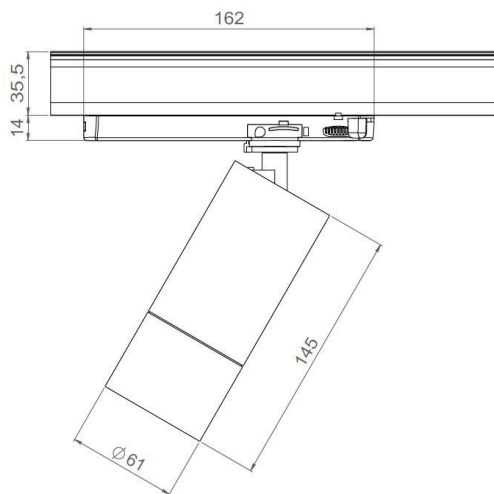

AURORE D60

230V Track version

Barrel diameter	61 mm
Luminous flux	600 lm to 2000 lm
Net weight	0.50 kg
Power supply	Track adapter suitable for Global Trac Pro, Relco, SLV...
LED power	9W to 25W

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss

Last update : 08.03.2022

8/10

Firalux & LOuss brands



SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



Track DALI Global Trac
pulse
Warning: Dimensions
may vary by a few mms
from one manufacturer
to another

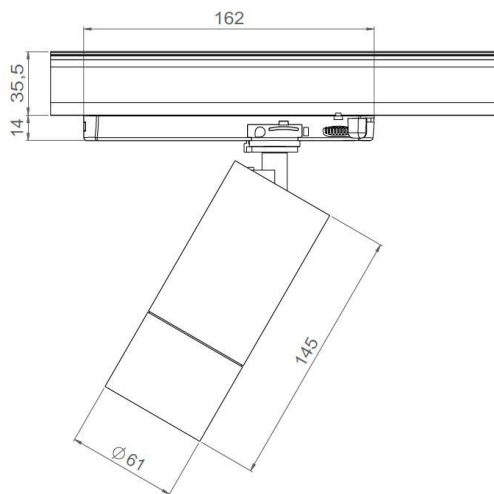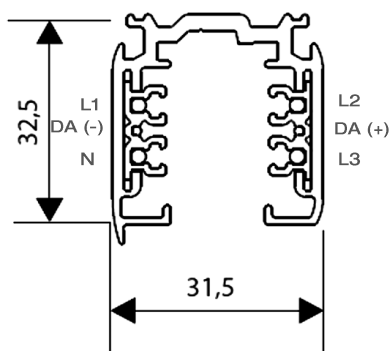

AURORE D60

DALI Track version 230V

Barrel diameter	61 mm
Luminous flux	600 lm to 2000 lm
Net weight	0.50 kg
Power supply	Track adapter suitable for Global Trac Pulse, STUCCHI, SLV...
LED power	9W to 25W

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss

Last update : 08.03.2022


9/10

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

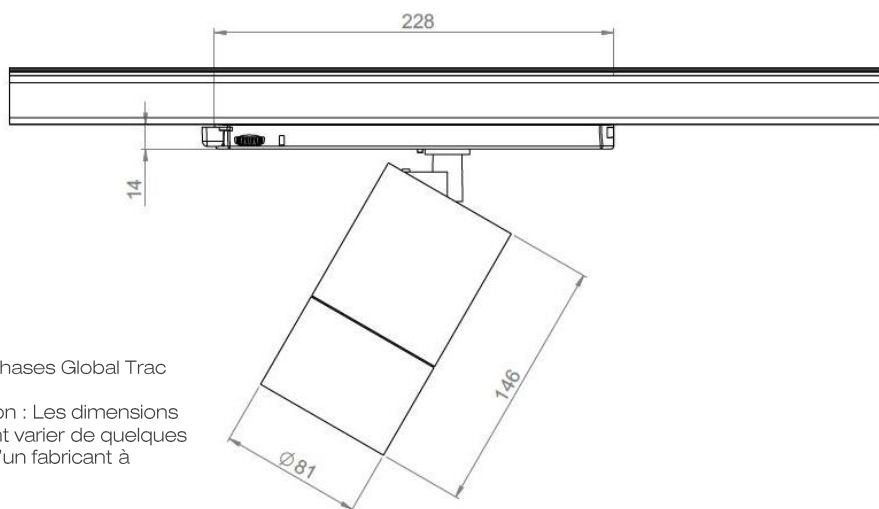

Rail 3 phases Global Trac
PRO
Attention : Les dimensions
peuvent varier de quelques
mms d'un fabricant à
l'autre



AURORE D82

230V Track version

Barrel diameter	82mm
Luminous flux	700 to 2500 lm
Net weight	0.80 kg
Power supply	Track adapter suitable for Global Trac PRO XTS ou équivalent, ERCO, Trajectoire...
LED power	15W to 35W

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss

Last update : 08.03.2022

10/10

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE