

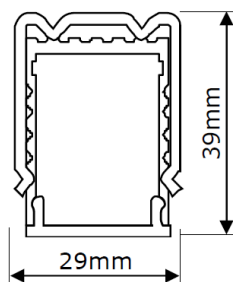
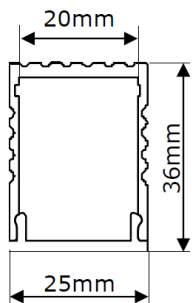


2535

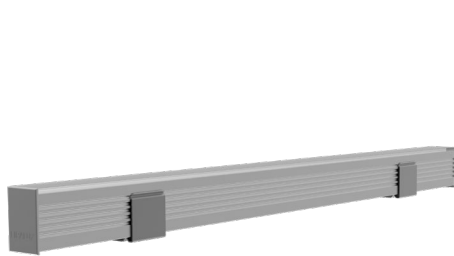

Fixing clip

2535

Range	Linear LED light
--------------	------------------

Description	SL8 natural anodized aluminium profile + LED strip or PCB LED + opal diffuser + 2 natural aluminium end caps + fixing clips
--------------------	---

Dimensions	Width : 25mm – Height : 39mm to 52mm, with fixing clips Length upon request up to 3m
-------------------	---

LED strip	Colour temperature	LED power W/m			CRI	Cut-out size mm	LED /m	IP
FIRALED 160	2700K – 3000K 3500K – 4000K	10.40	15.50	18	90	50	160	IP20
FIRASLIM 60	2700K – 3000K 4000K	13.45			90	100	60	IP20
FIRASLIM 120CC	2700K – 3000K 3000K+3500K 4000K	9.60	14.40	19.20	90	50	120	IP20
FIRASTRIP 72	2700K – 3000K 4000K	15.80			80 - 90	83.3	72	IP20 IP65
FIRASTRIP 96	2700K – 3000K 3500K – 4000K	21.10			80	62.50	96	IP20 IP65
C35-127	3500K	12.70			> = 80	62.5	128	IP20
CRGB	RGB	14.40				100	60	IP20
SIMPLE M	2700K – 3000K 4000K	9.60	14.40		80 - 90	50	120	IP20 IP65
TRICHIP	2700K – 3000K 4000K	7.20	14.40		80	100	80	IP20 IP65

LED PCB	Colour temperature	LED power W/m			CRI	Cut-out size mm	LED/ m	IP
	2700K - 3000K 3000K - 4000K	9.6	14.4	19.2	90/95	100	120	IP65

Separate power supply	24V constant voltage
------------------------------	----------------------

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOUSS





Last update : 10/05/2022

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

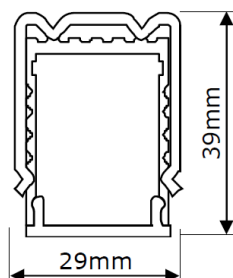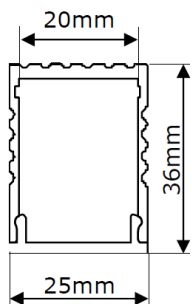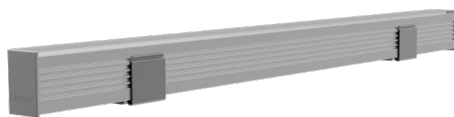

Fixing clip

2535

Connection	<p>LED strip : 5m maximum in series</p> <p>LED PCB : 9.6W : 7m maximum in series</p> <p>14.4W : 5m maximum in series</p> <p>19.2W : 3.50m maximum in series</p>
Use limitations	<p>The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (T_a) would lead to a more rapid mortality of the product and the withdrawal of our guarantees.</p> <p>The drivers, if not delivered by LOuss, must be approved before use.</p>
Warranty	<p>Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature.</p> <p>3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product.</p> <p>All products are electrically tested and received a functional burn-in.</p>

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOuss

Last update : 10/05/2022

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE