





MINI 23



24V



MADE IN
FRANCE



Natural anodized aluminium profile + opal diffuser

MINI 23

Range	Linear LED light							
Description	Natural anodized aluminium profile + LED strip + opal diffuser + 2 natural aluminium end caps (thickness 1.5mm) + fixing clips							
Dimensions	Width : 17mm – Height : 36mm, with fixing clips Length upon request up to 2500mm							
LED strip	Colour temperature	LED power W/m			CRI	Cut-out size mm	LED /m	IP
FIRALED 160	2700K – 3000K 3500K - 4000K	10.40	15.50	18	90	50	160	IP20
FIRASLIM 60	2700K – 3000K 4000K	13.45			90	100	60	IP20
FIRASLIM 120CC	2700K - 3000K 3000K+3500K 4000K	9.60	14.40	19.20	90	50	120	IP20
FIRASTRIP 72	2700K – 3000K 4000K	15.80			80 - 90	83.3	72	IP20
FIRASTRIP 96	2700K – 3000K 3500K – 4000K	21.10			80	62.50	96	IP20
C35-127	3500K	12.70			> = 80	62.5	128	IP20
CRGB	RGB	14.40				100	60	IP20
SIMPLE M	2700K – 3000K 4000K	9.60	14.40		80 - 90	50	120	IP20
TRICHIP	2700K – 3000K 4000K	7.20	14.40		80	100	80	IP20
Separate power supply	24V constant voltage							

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss


Last update : 23/05/22

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

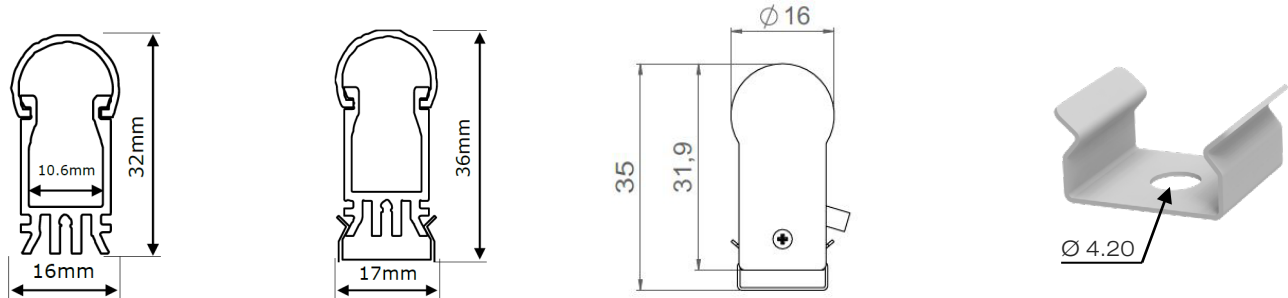

Natural anodized aluminium profile + opal diffuser

MINI 23

Connection	5m maximum in series
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

LOuss

Last update : 23/05/22

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE