


## MINI7 UP

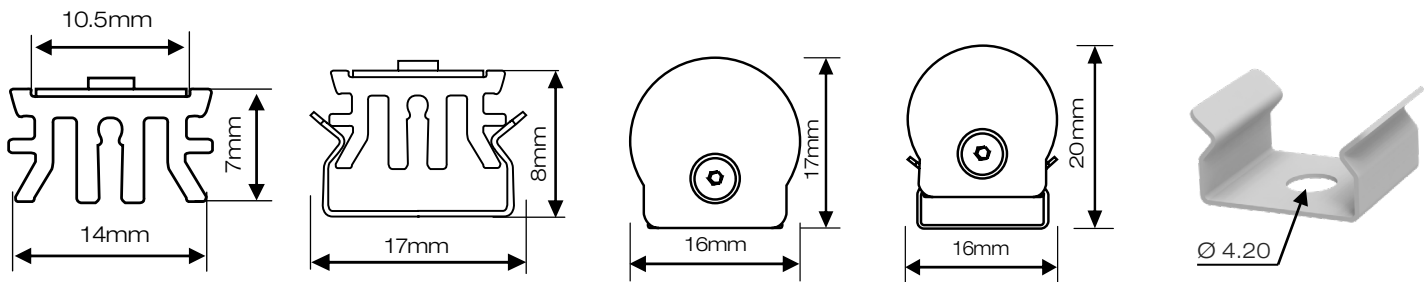

Natural anodized aluminium profile + opal diffuser

## MINI7 UP

<b>Range</b>	Linear LED light
--------------	------------------

<b>Description</b>	Natural anodized aluminium profile + LED strip + opal diffuser + 2 natural aluminium end caps (thickness 1.5mm) + fixing clips
--------------------	--

<b>Dimensions</b>	Width : 17mm – Height : 20mm, with fixing clips Length upon request up to 2500mm
-------------------	---

LED strip	Colour temperature	LED power W/m			CRI	Cut-out size mm	LED /m	IP
FIRALED 160	2700K – 3000K 3500K - 4000K	10.40	15.50	18	90	50	160	IP20
FIRASLIM 60	2700K – 3000K 4000K	13.45			90	100	60	IP20
FIRASLIM 120CC	2700K - 3000K 3000K+3500K 4000K	9.60	14.40	19.20	90	50	120	IP20
FIRASTRIP 72	2700K – 3000K 4000K	15.80			80 - 90	83.3	72	IP20
FIRASTRIP 96	2700K – 3000K 3500K – 4000K	21.10			80	62.50	96	IP20
C35-127	3500K	12.70			> = 80	62.5	128	IP20
CRGB	RGB	14.40				100	60	IP20
SIMPLE M	2700K – 3000K 4000K	9.60	14.40		80 - 90	50	120	IP20
TRICHIP	2700K – 3000K 4000K	7.20	14.40		80	100	80	IP20

<b>Separate power supply</b>	24V constant voltage
------------------------------	----------------------

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

LOUSS


Last update : 19/05/22

Firalux & LOUSS brands

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
www.louss.fr  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE

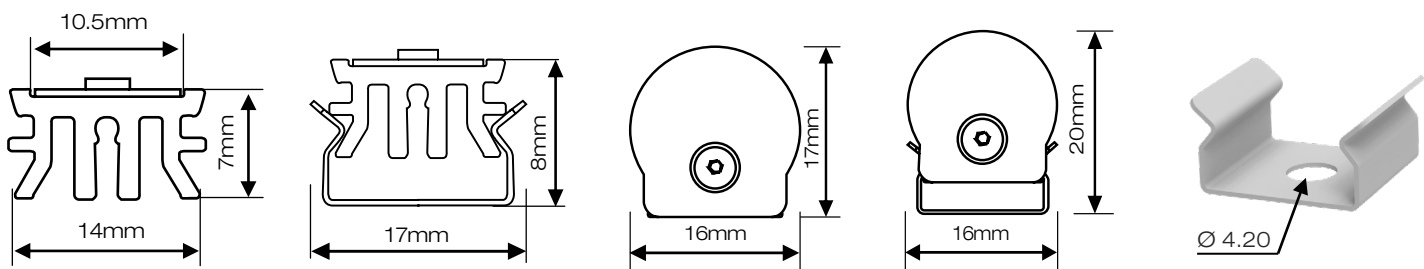

Natural anodized aluminium profile + opal diffuser

## MINI7 UP

<b>Connection</b>	5m maximum in series
<b>Use limitations</b>	<p>The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees.</p> <p>The drivers, if not delivered by LOuss, must be approved before use.</p>
<b>Warranty</b>	<p>Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product.</p> <p>All products are electrically tested and received a functional burn-in.</p>

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

LOuss

Last update : 19/05/22

*Firalux & LOuss brands*

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE