


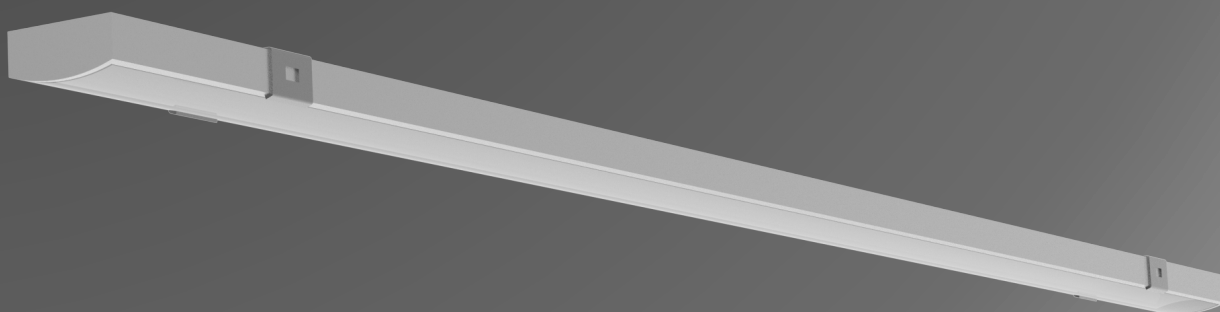




SL8



Fixing clip

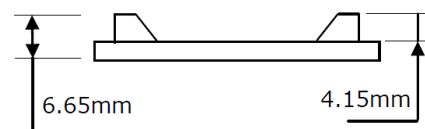

End cap

SL8

Range	Linear LED light
-------	------------------

Description	SL8 natural anodized aluminium profile + LED strip or PCB LED + opal or clear diffuser + 2 natural aluminium end caps + fixing clips
-------------	--

Dimensions	Width : 26mm – Height : 10mm with fixing clips Length upon request up to 3m (5m maximum)
------------	---

LED strip	Colour temperature	LED power W/m			CRI	Cut-out size mm	LED /m	IP
FIRALED 160	2700K – 3000K 3500K – 4000K	10.40	15.50	18	90	50	160	IP20
FIRASLIM 60	2700K – 3000K 4000K	13.45			90	100	60	IP20
FIRASLIM 120CC	2700K - 3000K 3000K+3500K 4000K	9.60	14.40	19.20	90	50	120	IP20
FIRASTRIP 72	2700K – 3000K 4000K	15.80			80 - 90	83.3	72	IP20 IP65
FIRASTRIP 96	2700K – 3000K 3500K – 4000K	21.10			80	62.50	96	IP20 IP65
C35-127	3500K	12.70			> = 80	62.5	128	IP20
CRGB	RGB	14.40				100	60	IP20
SIMPLE M	2700K – 3000K 4000K	9.60	14.40		80 - 90	50	120	IP20 IP65
TRICHIP	2700K – 3000K 4000K	7.20	14.40		80	100	80	IP20 IP65

LED PCB	Colour temperature	LED power W/m			CRI	Cut-out size mm	LED/ m	IP
	2700K - 3000K 3500K - 4000K	9.60	14.40	19.20	90 - 95	100	120	IP65

Separate power supply	24V constant voltage
-----------------------	----------------------

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss



Last update : 29/04/2022

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



Fixing clip

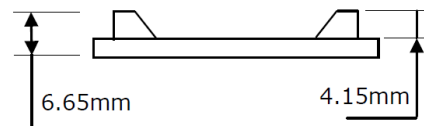

End cap

SL8

Connection	LED strip : 5m maximum in series LED PCB : 9.6W : 7m maximum in series 14.4W : 5m maximum in series 19.2W : 3.50m maximum in series
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

LOuss

Last update : 29/04/2022

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE