

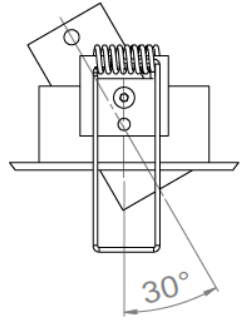


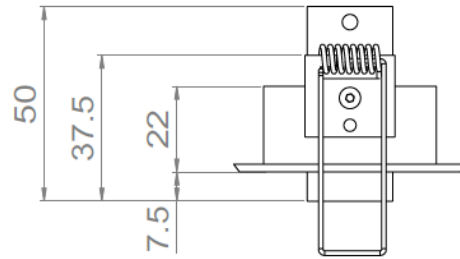

AURORE D22

*Recessed version
with mounting ring*

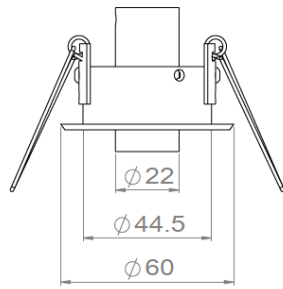

AURORE D22

Recessed version with mounting ring

Range	Highly flexible recessed ceiling downlight for general & accent lighting
Description	Low luminance Rotation 360° - Adjustable tilt 30° White finish RAL 9003 (other upon request)
Installation	Installation diameter : 52mm No specific tools required
Net weight	0.06kg
LED characteristics	2000K - 2200K - 2700K - 3000K - 3500K - 4000K - 4500K MacAdam ellipse : 3 SDCM CRI90 (standard version) - CRI>90, R9 > 80 (retail version) UGR < 15
Optical beam	10° - 15° - 20° - 25° - 40° - Elliptical
Connection	Supplied with 0.50m cable
Separate power supply	Remote constant current driver Dimmable driver upon request
LED power	2W at 700mA max
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOuss

Last update : 07/07/2022

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE