


ROUND WALL-MOUNTED



ROUND WALL-MOUNTED  
MAGNETIC

## AURORE D40 WALL-MOUNTED





## AURORE D40 WALL-MOUNTED • Round • Round Magnetic

<b>Range</b>	Highly adjustable luminaires for general & accent lighting
<b>Description</b>	Luminaire equipped with low luminance spotlight Rotation 360° - Adjustable tilt 90° max Easily changeable LED, optics and accessories on-site without any tool, with integrated <b>Easy Swap</b> system (see page 4)
<b>Finish</b>	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)
<b>Dimensions</b>	Spotlight diameter : 40mm Spotlight length : 80mm Wall-mounted box diameter : 52mm
<b>Net weight</b>	0.150kg
<b>LED characteristics</b>	2700K - 3000K - 3500K - 4000K - 5000K (other upon request) MacAdam ellipse : 3 SDCM CRI90 (standard version) - CRI95, R9 > 80
<b>Optical beams</b>	6° - 10° - 15° - 20° - 25° - 30° - 35° - 40° - 55° - 60° - Elliptical UGR < 15
<b>Accessories</b>	Filtres, honeycomb grid upon request
<b>Luminous flux</b>	300 to 800 lumen according to version
<b>Connection</b>	Supplied with 0.5m cable Or connectors in the box
<b>Power supply</b>	Remote constant current driver 700mA max. according to version Dimmable driver upon request For US & Canada, use a driver UL class 2
<b>Power</b>	4W to 10W according to version
<b>Use limitations</b>	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
<b>Warranty</b>	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Last update: 2025/06/17

2/4

LOuss

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z


Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE


Firalux & LOuss brands



## AURORE D40 ROUND WALL-MOUNTED

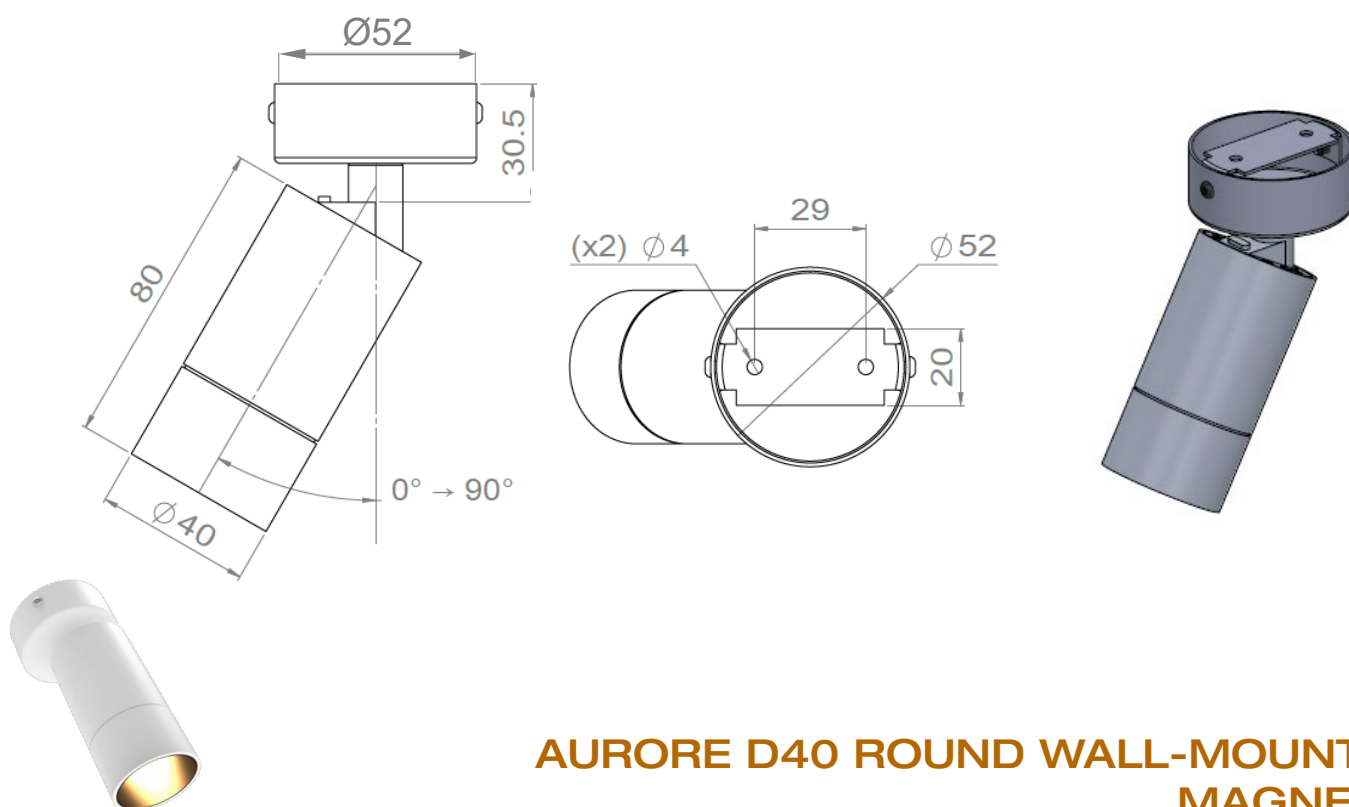

## AURORE D40 ROUND WALL-MOUNTED MAGNETIC

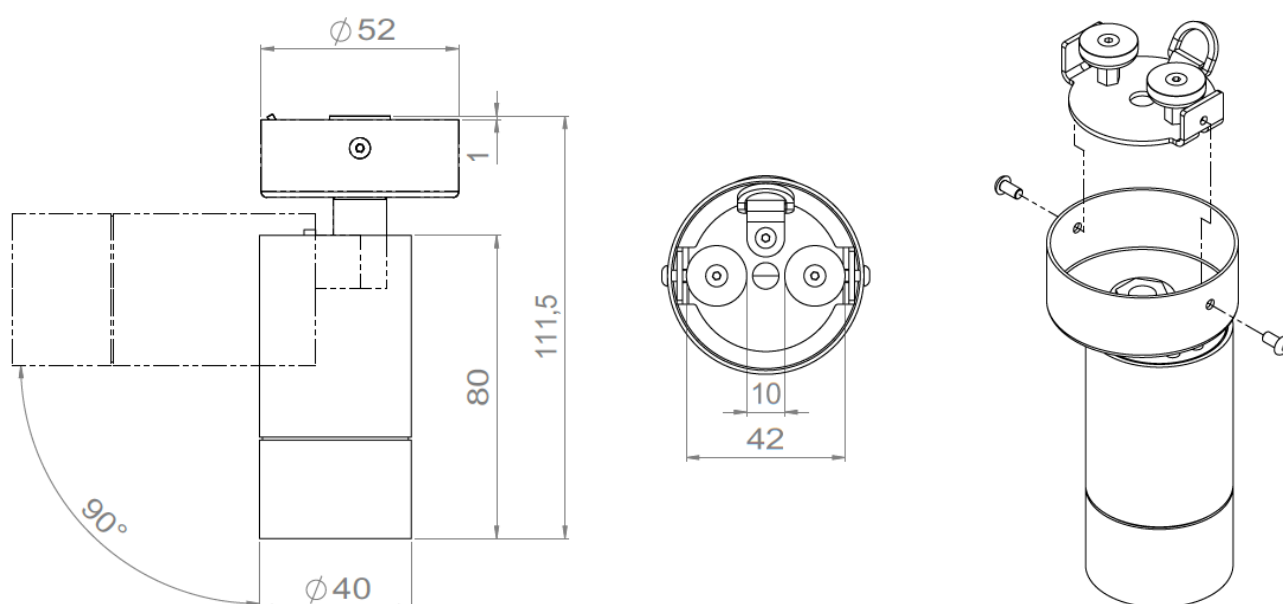

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

**Louss**

Last update: 2025/06/17

Firalux & LOuss brands

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z


Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE



## AUORE D40 WALL-MOUNTED • Round • Round Magnetic

### Easy Swap system

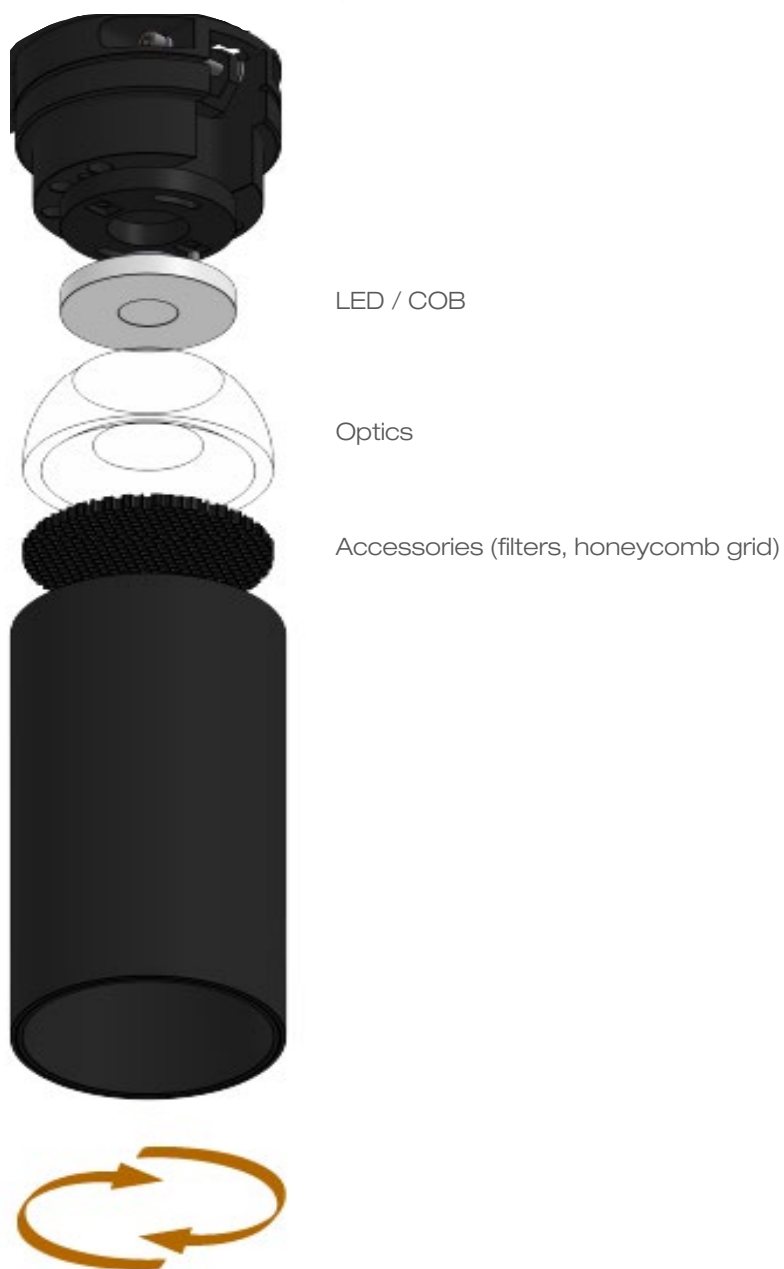

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

**LOuss**

Last update: 2025/06/17

*Firalux & LOuss brands*

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE