





TRIM

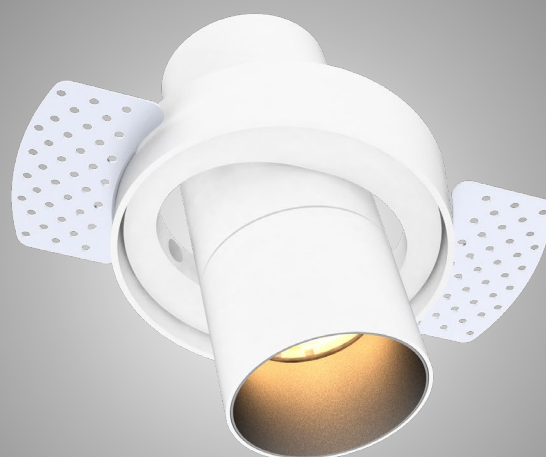


TRIMLESS

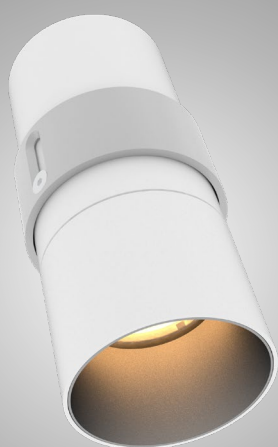

FIXED CANON

## AURORE D60 RECESSED





## AUORE D60 • TRIM • TRIMLESS • FIXED CANON

|                     |                                                                                                                                       |                               |                                    |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|------------------------------------|
| Range               | Highly adjustable recessed ceiling downlight for general & accent lighting                                                            |                               |                                    |
| Description         | Low luminance<br>Rotation 360°<br>Trim & Trimless : Adjustable tilt 30°<br>Fixed Canon : No tilt                                      |                               |                                    |
| Finish              | White RAL 9003 matt finish<br>Black RAL 9005 matt finish (other upon request)                                                         |                               |                                    |
| Dimensions          | Trim                                                                                                                                  | Trimless                      | Fixed Canon                        |
|                     | Spotlight diameter 61mm                                                                                                               | Spotlight diameter 61mm       | Spotlight diameter 61mm            |
|                     | External diameter 123mm                                                                                                               | Recessed frame diameter 109mm | External diameter 61mm             |
|                     | Installation diameter 104.5mm                                                                                                         | Installation diameter 109mm   | Installation diameter 67mm         |
|                     | Installation depth 87mm                                                                                                               | Installation depth 89mm       | Installation depth 81.5 to 101.5mm |
| Net weight          | 0.450kg                                                                                                                               | 0.450kg                       | 0.4kg                              |
| LED characteristics | 2700K-3000K-3500K-4000K – 5000K (other upon request)<br>MacAdam ellipse : 3 SDCM (standard)<br>2 SDCM (premium)<br>CRI : 90 – 95 - 98 |                               |                                    |
| Optical beams       | 13° - 18° - 24° - 32° (CRI < 98)<br>7° (CRI 90)<br>UGR < 15                                                                           |                               |                                    |
| Accessories         | Filters, honeycomb grids upon request                                                                                                 |                               |                                    |
| Luminous flux       | 600 to 1600 lumen according to version                                                                                                |                               |                                    |
| Connection          | Supplied with 0.5m cable                                                                                                              |                               |                                    |
| Power supply        | 700mA max. constant current driver according to version<br>Dimmable driver upon request                                               |                               |                                    |
| Power               | < 20 W according to version                                                                                                           |                               |                                    |

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Louss

Last update: 2025.06.12

2/6

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOuss

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE





AURORE D60 • TRIM • TRIMLESS • FIXED CANON

|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Use limitations | <p>The product must be installed in a ventilated area</p> <p>Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees</p> <p>The drivers, if not delivered by LOuss, must be approved before use</p>                                                                                                                                      |
| Warranty        | <p>Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty</p> <p>The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product</p> <p>All products are electrically tested and received a functional burn-in</p> |



All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged



## AURORE D60 TRIM

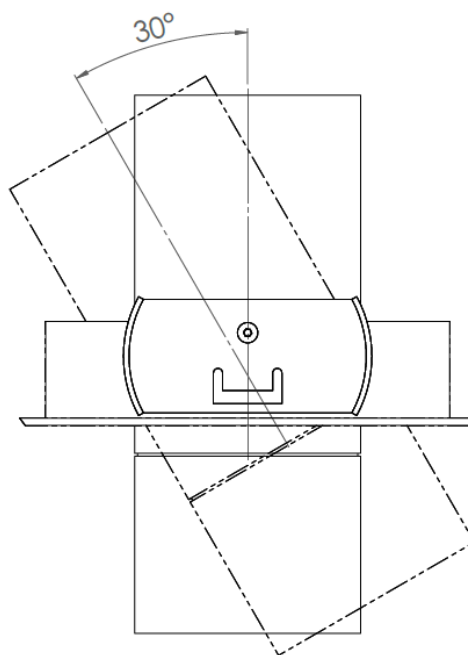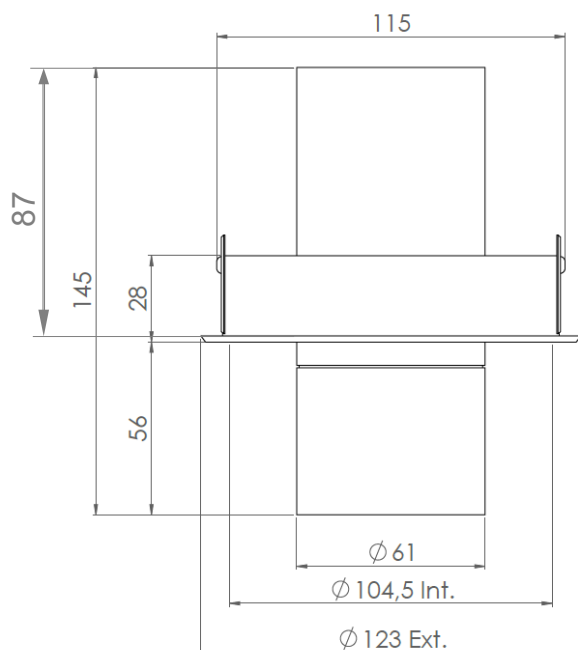

## AURORE D60 TRIMLESS

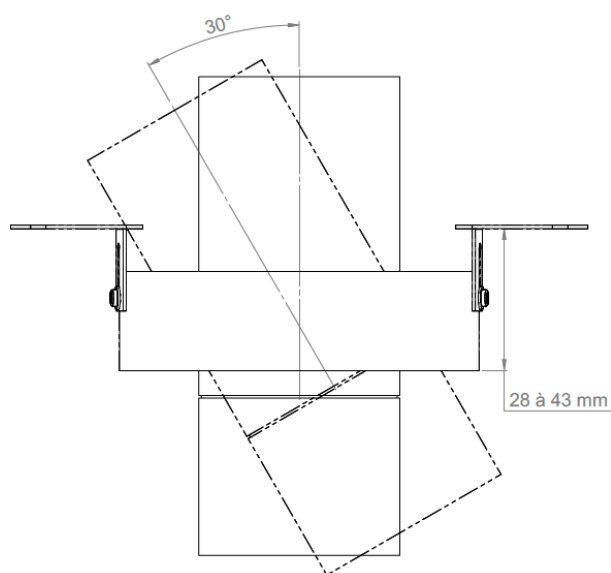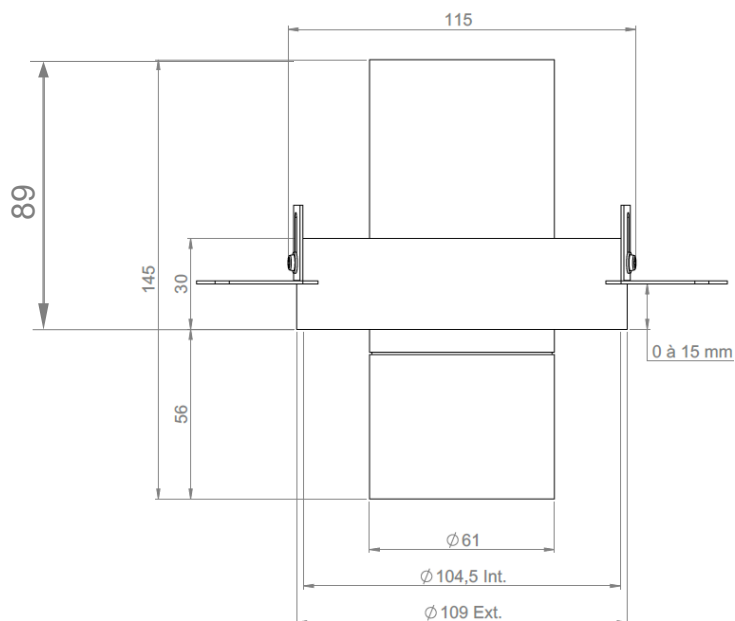

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

**LOUSS**

Last update: 2025.06.12

4/6


BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE



## AURORE D60 FIXED CANON

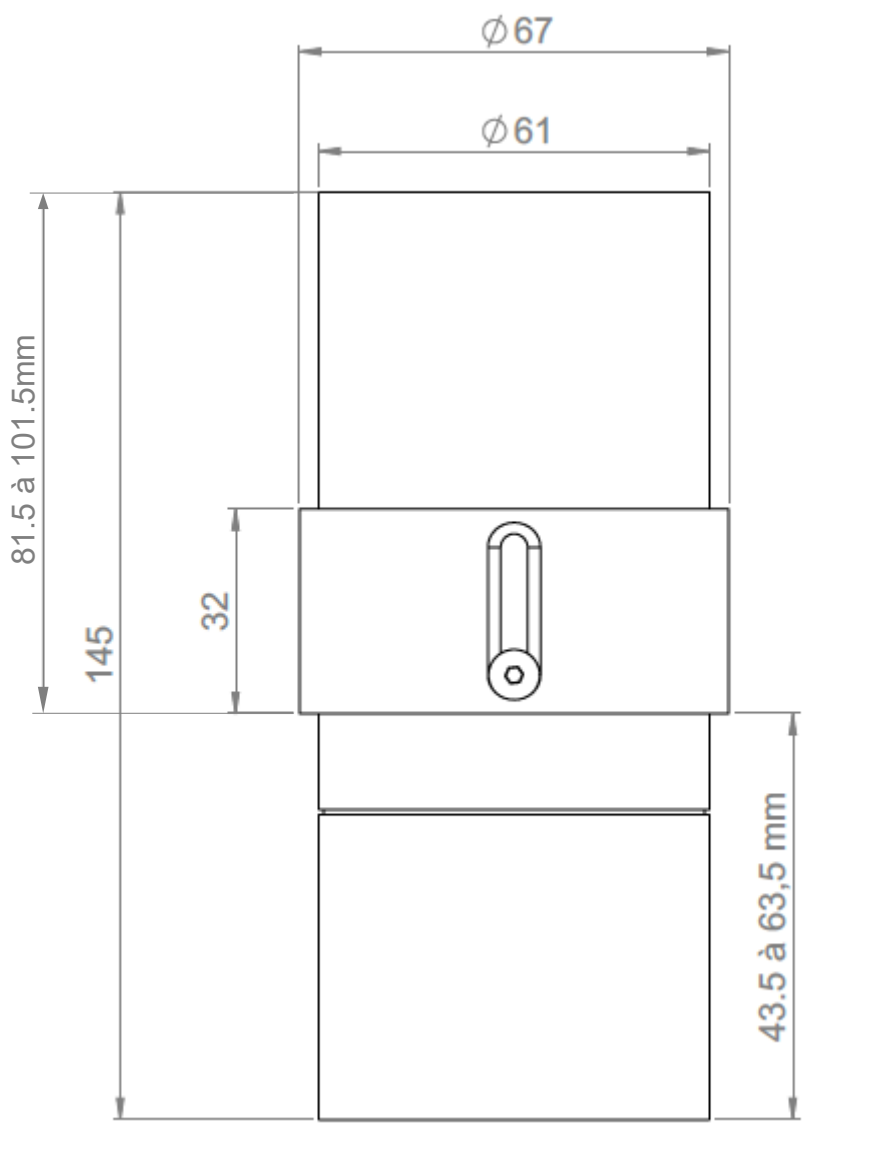

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Louss

Last update: 2025.06.12

5/6

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z


Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE




## AUORE D60 • TRIM • TRIMLESS • FIXED CANON


### Installation from above




Install the recessed box from above and screw it into the surface

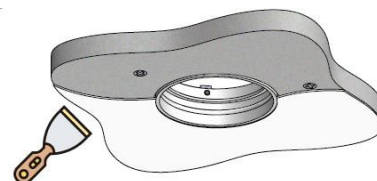


Cover the lateral plates of the recessed box by coating and painting




Insert the spotlight from below

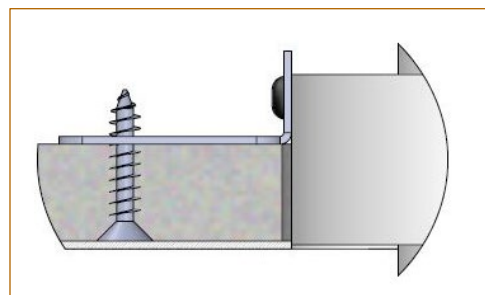


### Installation from below




Install the recessed box from below and screw it into the surface

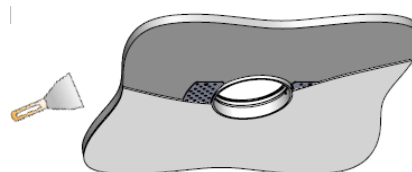

Cover the lateral plates of the recessed box by coating and painting



Insert the spotlight from below

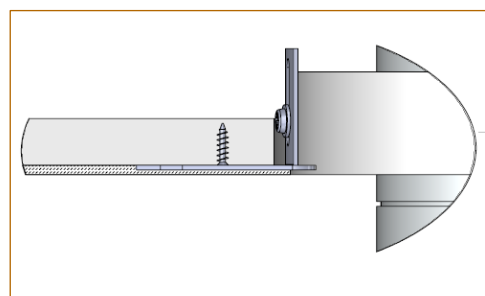

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged