



MINI 23

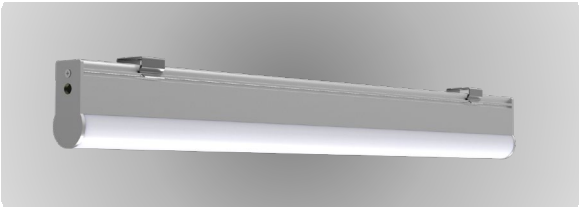

MINI 23

Range	Linear LED light						
Description	Natural anodized aluminum profile LED strip Opal diffuser 2 natural anodized aluminum end caps (thickness 1.5mm) Metallic fixing clips (2 per meter)						
Dimensions	Width : 17mm (with fixing clips) Height : 36mm (with fixing clips) Length upon request up to 2,500mm						
LED characteristics	2700K – 3000K – 3500K – 4000K CRI 90 R9 > 50						
Separate power supply	24V constant voltage For the US & Canada use a UL class 2 remote power supply						
Ruban LED	Températures de couleur	Puissance W/m			IRC	Pas de coupe	LED/m
FIRALED 160 (other upon request)	2700K – 3000K 3500K – 4000K	10.4	15.5	18	90	50mm	160
Connection	5m maximum in series Delivered according to customer's requirement with : <ul style="list-style-type: none">• A male and a female connector for daisy-chain cabling• 1m cable + female quick connector• Several lengths forming a garland						
Accessories	Connector board Y extension cables						
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use						
Warranty	Life span: L80-B10 = 35,000 hours (80% remaining flux) at 30°C ambient temperature 3-years parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and receive a functional burn-in						


All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

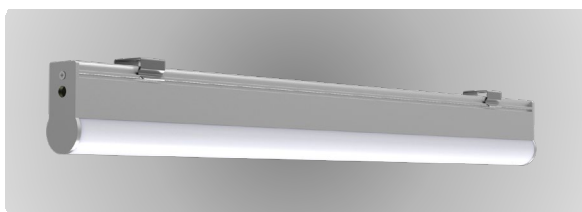


MINI 23

Dimensions & Installation guide


Natural anodized aluminum profile

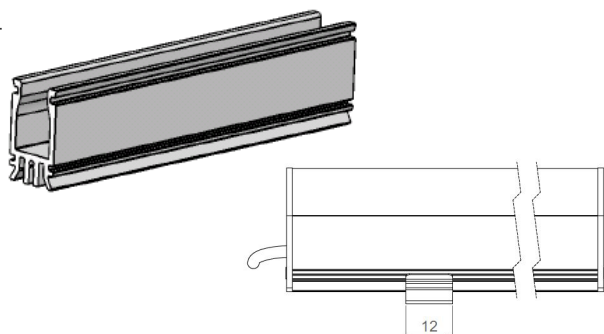

Opal cover

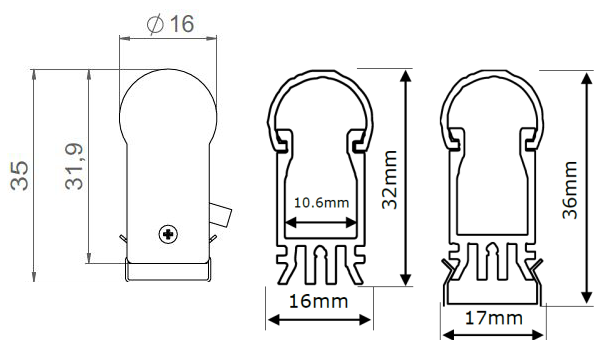


Fixing clips (2 per meter)




LED strip – Cut-out size 50mm




5m max per driver's output

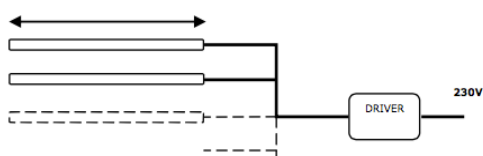

1

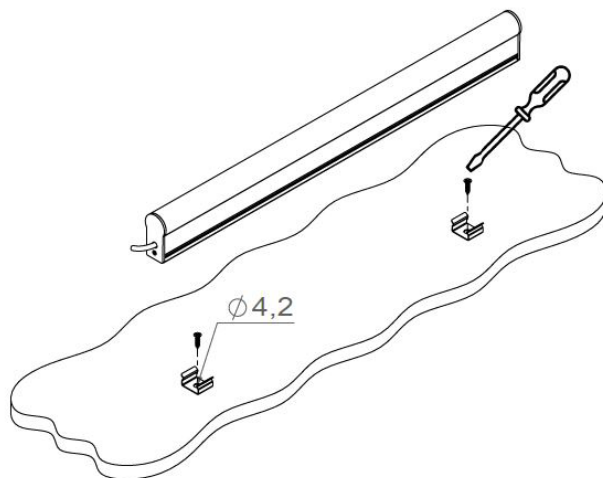

2

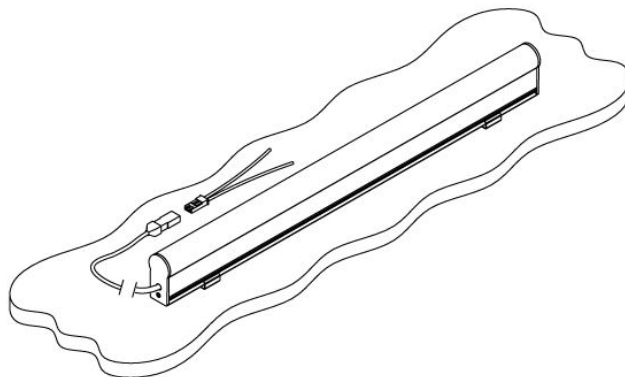

3



All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.


Last update : 2025.07.22

LOUSS

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

3/4
Firalux & LOUSS brands
Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

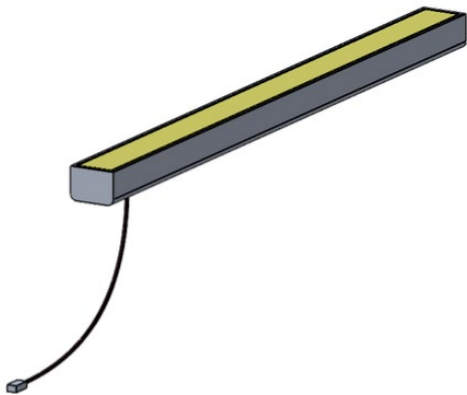


Cable below

110mm or 250mm cable + male quick connector on 1 end
or
1m cable + male quick connector on 1 end

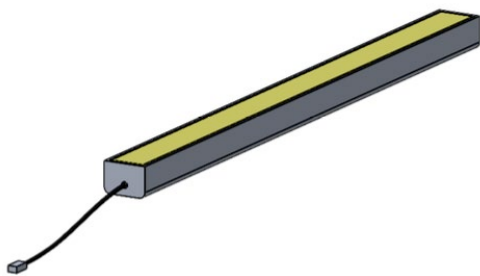


Cable on 1 end

110mm or 250mm cable + male quick connector on 1 end
or
1m cable + male quick connector on 1 end

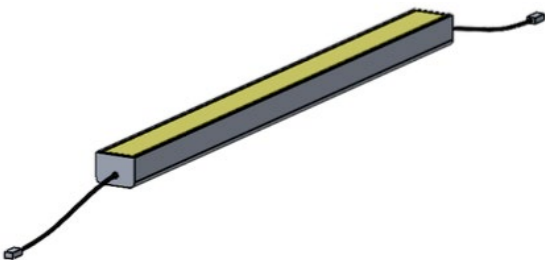

Daisy chain

110mm or 250mm cable + male quick connector on 1 end
+
110mm or 250mm cable + female quick connector on the other end

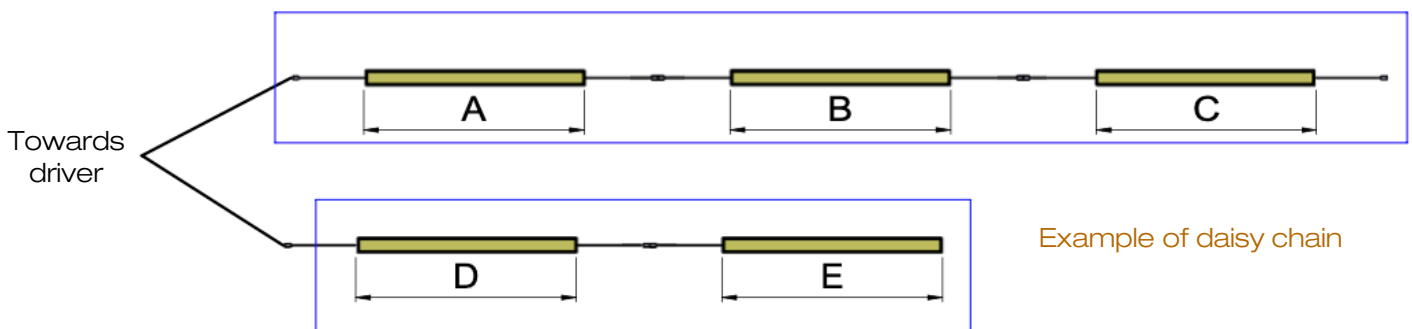

Create as many lines as needed to respect the maximum length per line, according to the selected LED strip and the wattage of the driver

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.