





6 SPOTLIGHTS

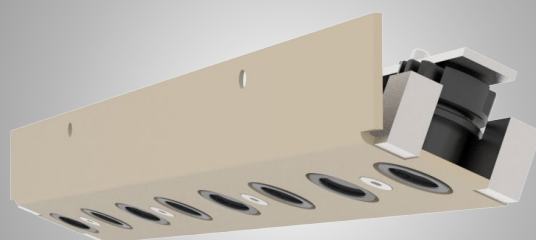



8 SPOTLIGHTS

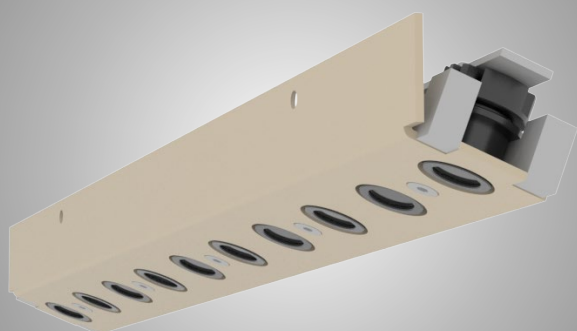

10 SPOTLIGHTS

IBRIDE




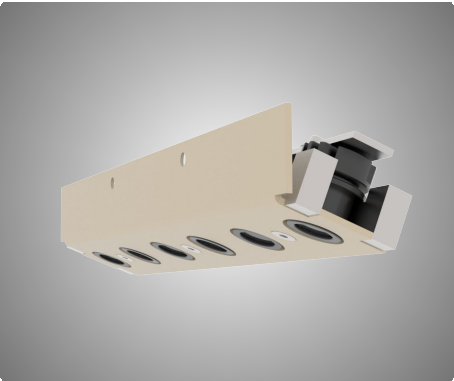


IBRIDE • 6 Spotlights • 8 Spotlights • 10 Spotlights


Range	Linear luminaire for accent lighting		
Description	Set of 6, 8 or 10 miniature spotlights fixed in 2° oriented opening and a metallic mount oriented at 21°		
Finish	Spotlights : Black anodized matt finish Mount : Painted in RAL 1013 matt finish (other upon request)		
Dimensions	6 Spotlights	8 Spotlights	10 Spotlights
	Length : 174mm	Length : 232mm	Length : 290mm
	Width : 30mm	Width : 30mm	Width : 30mm
	Height : 30mm	Height : 30mm	Height : 30mm
	Spotlight diameter : 14mm	Spotlight diameter : 14mm	Spotlight diameter : 14mm
Net weight	0.15 kg	0.19 kg	0.23 kg
LED characteristics	2700K – 3000K – 3500K – 4000K (other upon request) MacAdam ellipse : 3 SDCM CRI92 R9>80		
Optical beams	16° - 20° - 40° - 65° - 17°x49°		
Connection	Supplied with 0.5m cable (more length upon request)		
Separate power supply	700mA max. external constant current driver For the US & Canada use a UL class 2 driver		
LED power	6 LEDs – 12W max. 8 LEDs – 16W max. 10 LEDs – 20W max.		
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use		
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in		



IBRIDE • 6 SPOTLIGHTS

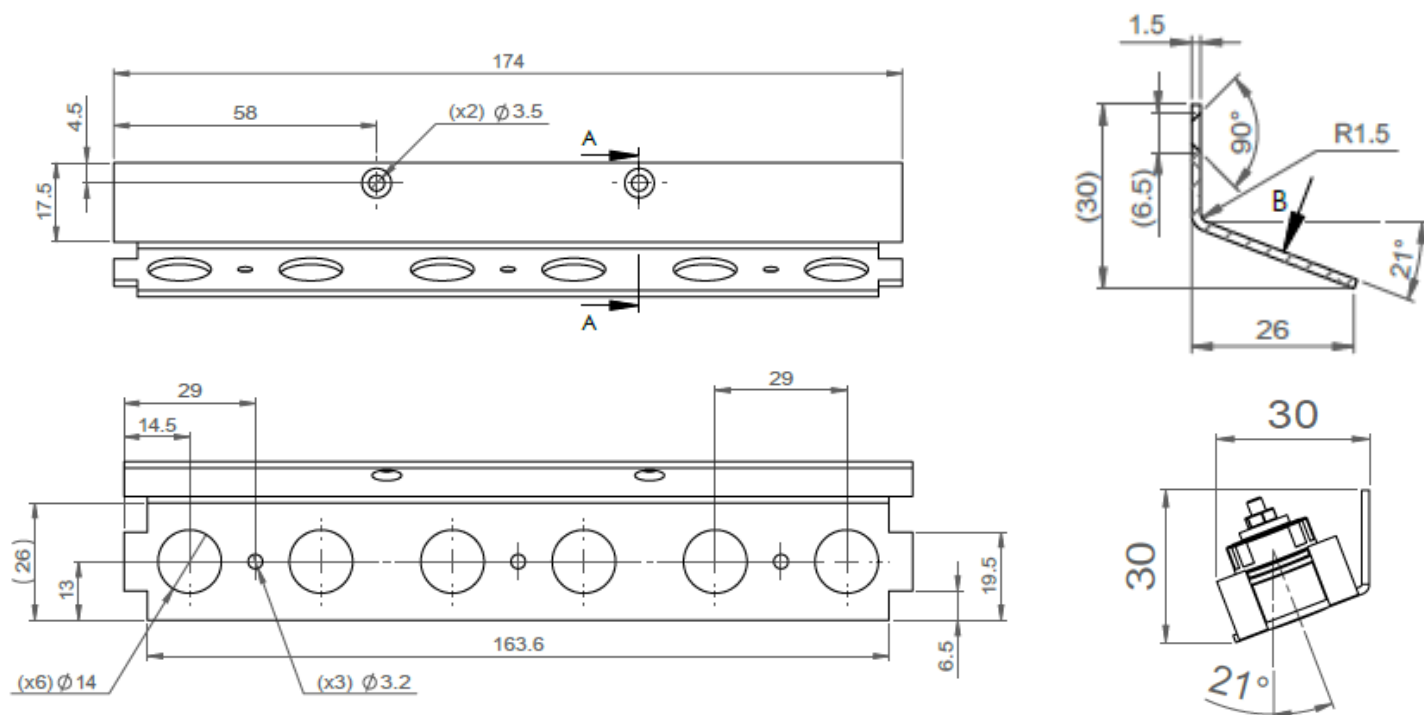

IBRIDE • 8 SPOTLIGHTS

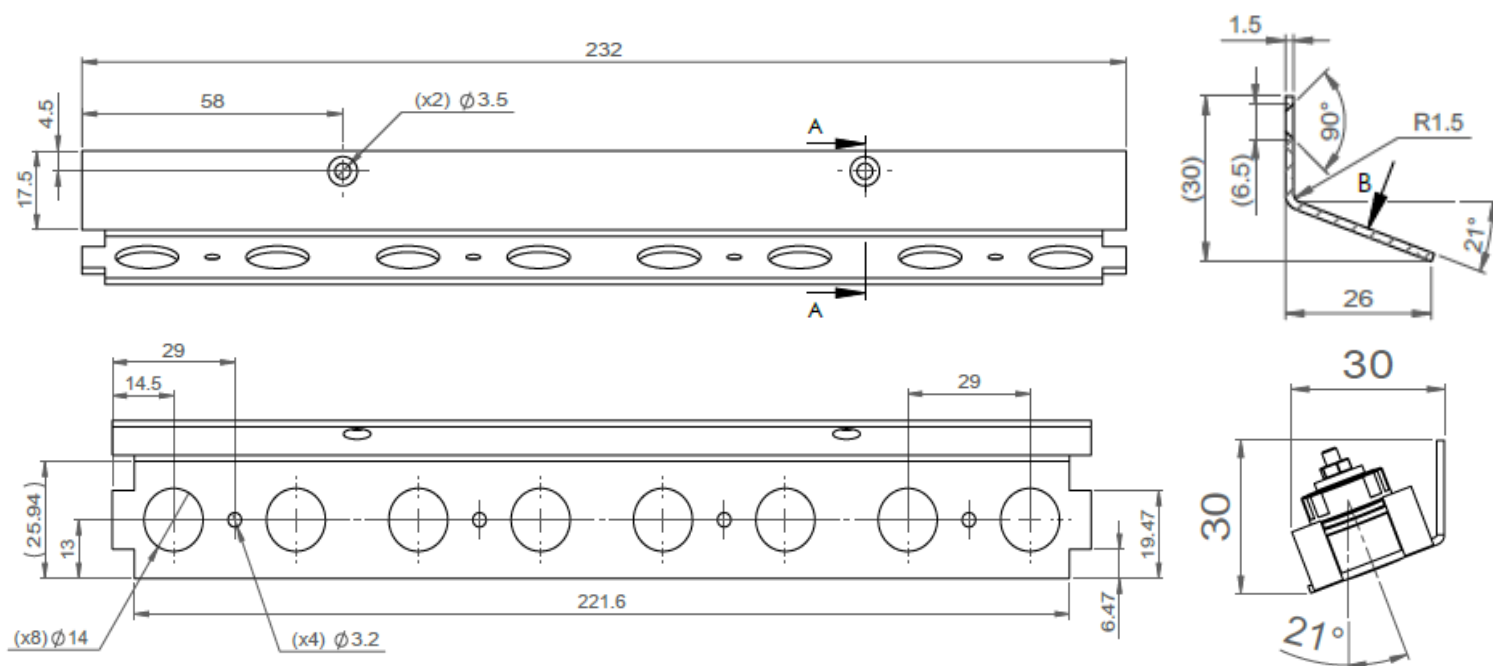

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2025.07.25

3/5



Firalux & LOuss brands

LOuss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

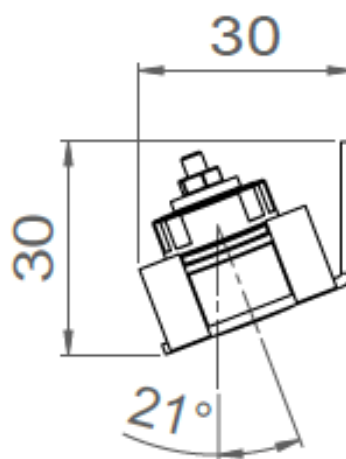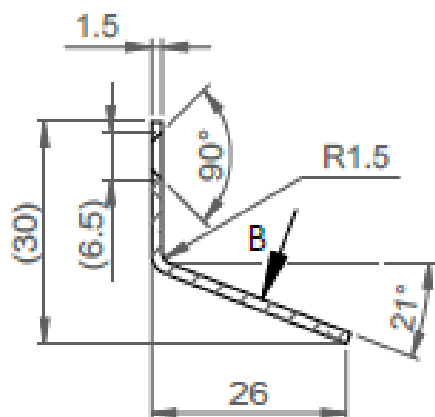


4/5

Firalux & LOuss brands



IBRIDE • 6 Spotlights • 8 Spotlights • 10 Spotlights

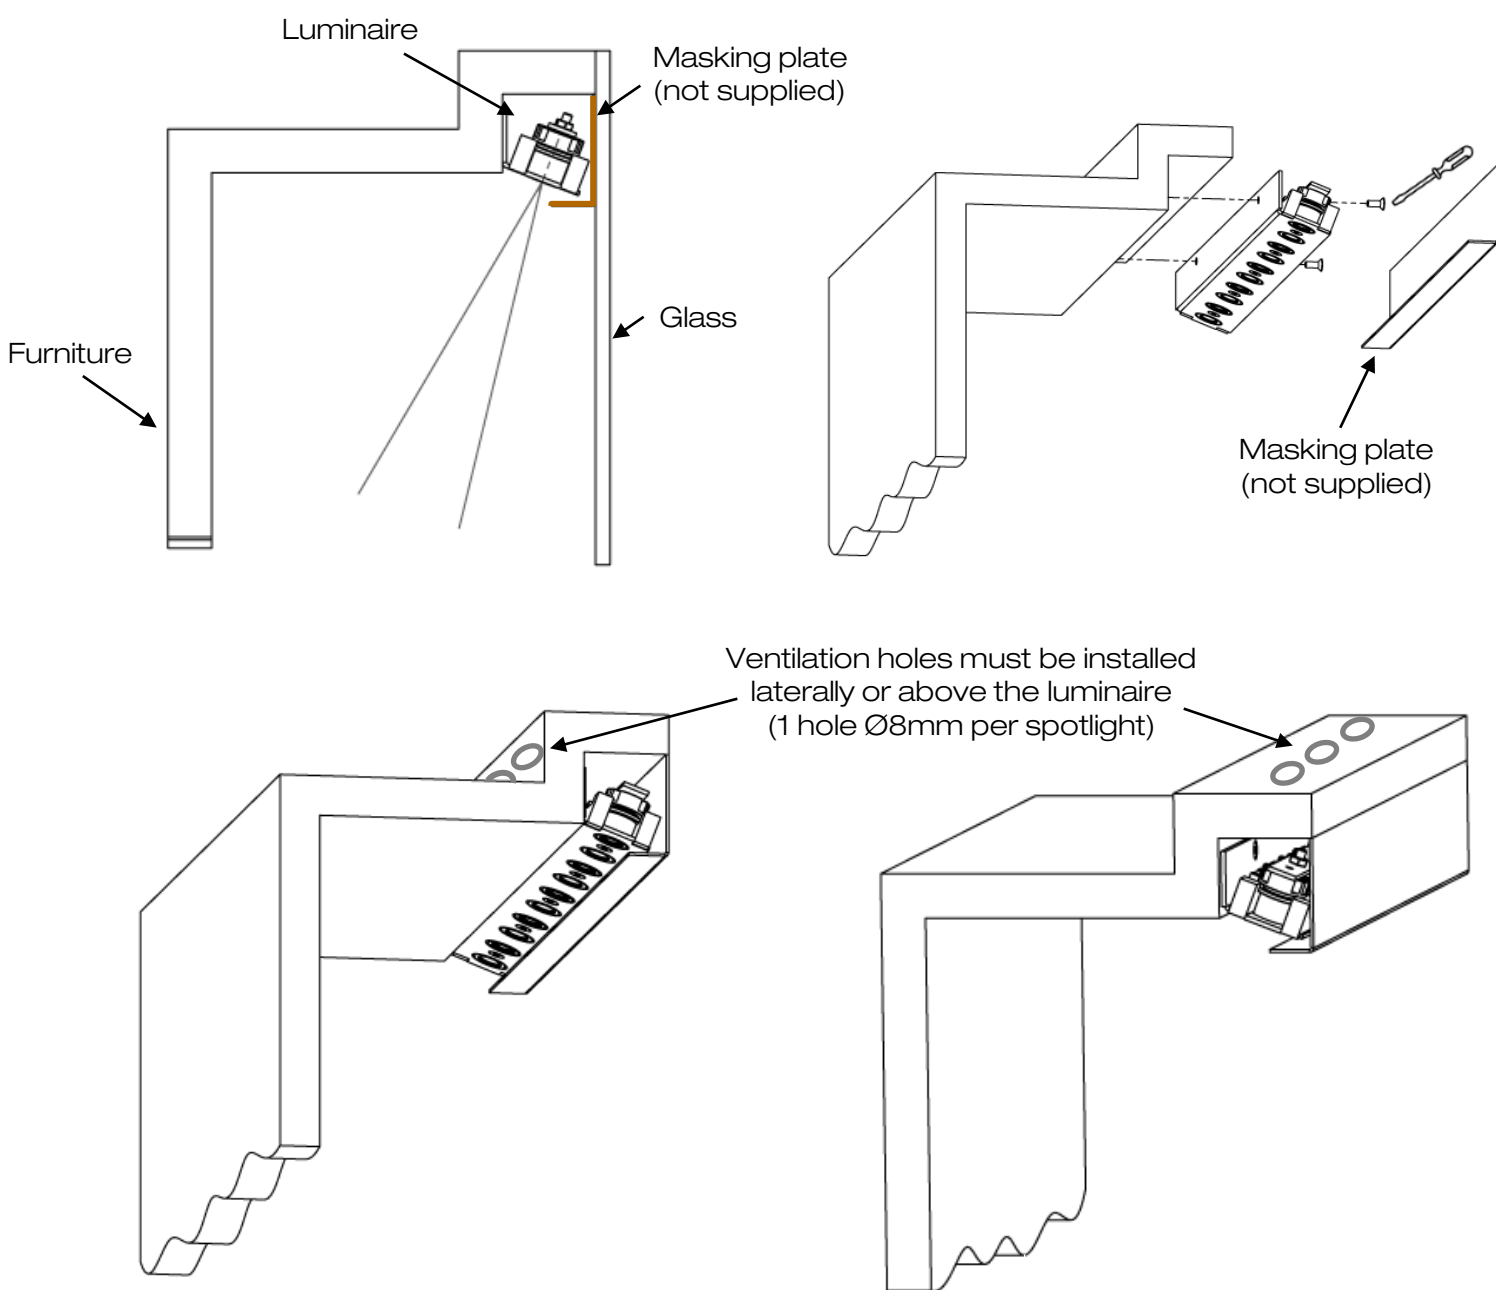

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOUSS

Last update : 2025.07.25

5/5

Firalux & LOUSS brands