


IK10 BOLLARD

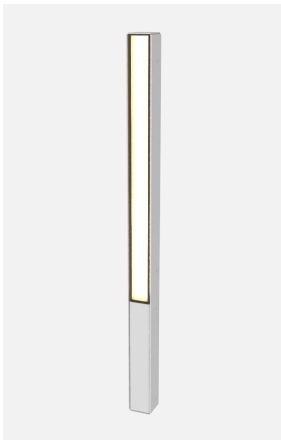

IK10 BOLLARD

Range	Outdoor lighting pillar
Description	Steel body IK10 luminaire profile
Finish	Paint – RAL upon request
Dimensions	Length : 49mm Width : 49mm Total height : 750mm IK10 profile height : 510mm
Net weight	5kg
LED characteristics	2700K – 3000K – 3500K – 4000K – 5000K (other upon request) CRI80 or 90 (95 upon request) MacAdam 3 step
Luminous flux	2500 lumen max. per meter
Connection	Connection directly inside the luminaire Cable input from below or behind the luminaire
Power supply	230V integrated power supply For the US & Canada use a UL class 2 power supply
LED power	18W max.
Use limitations	The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOuss


Creation : 2024.02.16 / Last update : 2025.08.06

2/3

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z




Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

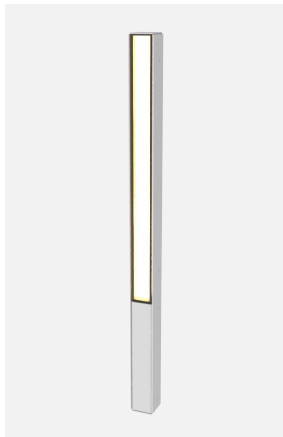

IK10 BOLLARD

Dimensions & Installation

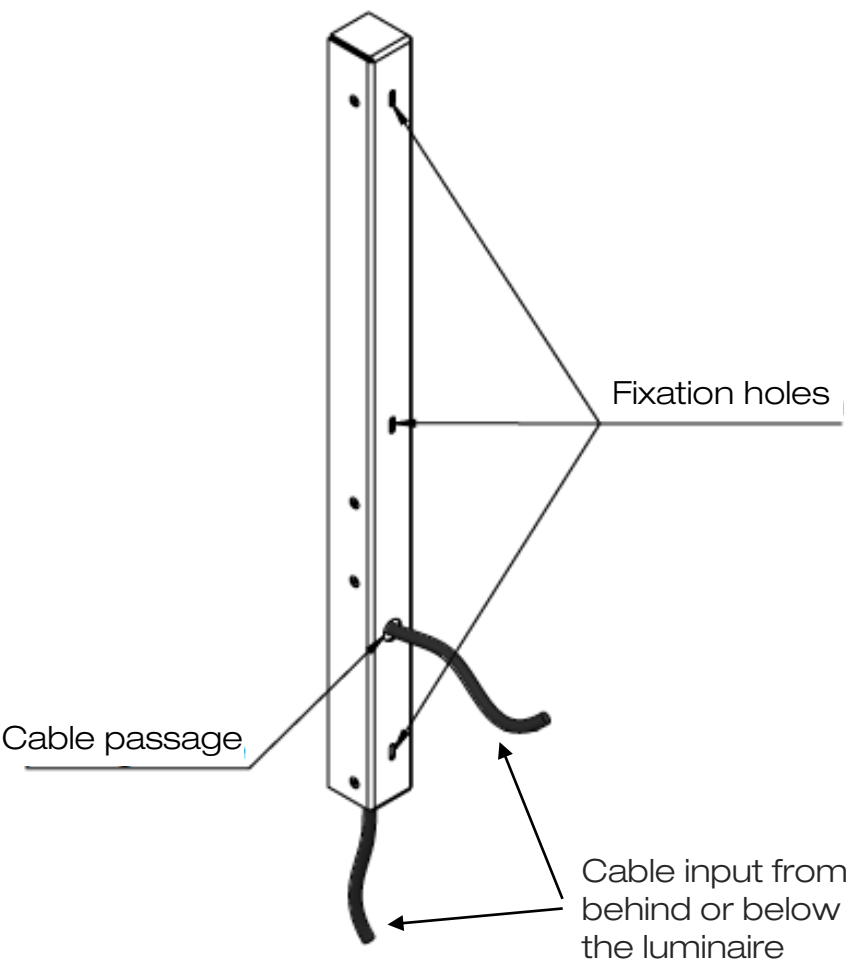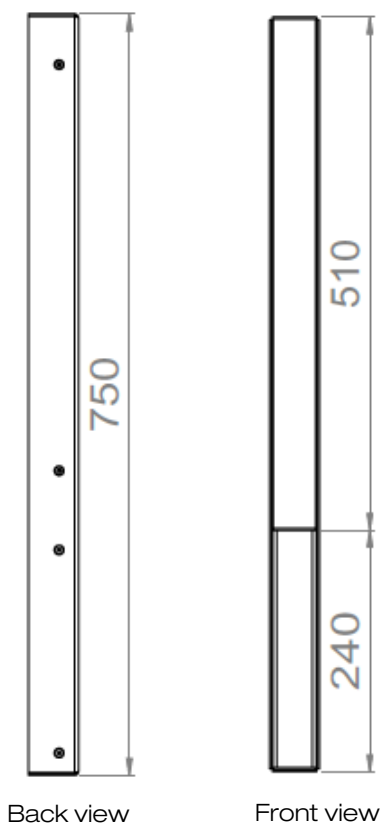

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged