



MYSTA ON TRACK



MYSTA ON TRACK

• 48V-Stucchi • 230V

Range	Adjustable low luminance spotlight on track for general and accent lighting			
Description	Low luminance Rotation 355° - Adjustable tilt 90° Easily changeable LED, optics and accessories on site, without any tool, with integrated LOuss Permuto easy swap system (see page 4)			
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)			
Dimensions	48V-Stucchi		230V	
	Spotlight Spotlight diameter : 46mm Spotlight length : 64mm Driver length : 98mm (On/Off, PWM) 166mm (DALI) Track – Stucchi Evo System ST1 : 26.2 x 21mm (For other EVO-S tracks, please see Stucchi documentation)		Spotlight Spotlight diameter : 46mm Spotlight length : 64mm Driver length : 162mm (On/Off – 700mA) 228mm (On/Off – 1,050mA) 253mm (DALI – 700mA)	
Net weight	48V-Stucchi		230V	
	Spotlight 0.180 kg Track – Stucchi Evo System ST1 : 0.70 kg/m (For other EVO-S tracks, please see Stucchi documentation)		Spotlight 0.250 kg (without track)	
LED characteristics	2700K - 3000K – 3500K – 4000K – 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard version) – 2 SDCM (premium version) CRI90 (standard version) – CRI95, R9 > 80 (premium version)			
Optical beams & Performances	Beam	Candela	Power	Photometry
	11°	10 900cd (3000K)	7W	ies 2591A
	16°	6 300 cd (3500K)	8W	ies 2645A
	20°	4 400 cd (3500K)	7W	ies 2510A
	23°	3 100 cd (3500K)	7W	ies 2511A
	34°	1 700 cd (3500K)	8W	ies 2617B
	43°	1 050 cd (3500K)	7W	ies 2513A

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update : 2025.09.17

Firalux & LOuss brands





MYSTA ON TRACK

• 48V-Stucchi • 230V

Performances	300 to 800 lumen UGR < 15	
Accessories	Filters, honeycomb grid upon request	
Power	4W to 10W according to version	
Power supply	48V-Stucchi	230V
	Spot adaptator for 48V Stucchi EVO-S track Separate power supply 230V/48V ON/OFF, PWM or DALI driver	Driver suitable for Global Trac Pro XTS track or equivalent (Ercos, Trajectoire...) 700mA or 1,050mA max. ON/OFF driver or 700mA max. DALI driver
	For the US & Canada use a UL class 2 power supply	
Installation	No specific tools required for the installation of the spotlight Stucchi EVO System Track ST1 : see page 6 (For other EVO-S tracks, please see Stucchi documentation)	
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in	

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update : 2025.09.17

Firalux & LOuss brands

LOuss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



MYSTA ON TRACK • 48V-Stucchi • 230V



LOuss **Permuto** – Easy swap system



All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update : 2025.09.17

4/12

Firalux & LOuss brands

LOuss


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



MYSTA ON TRACK 48V-S

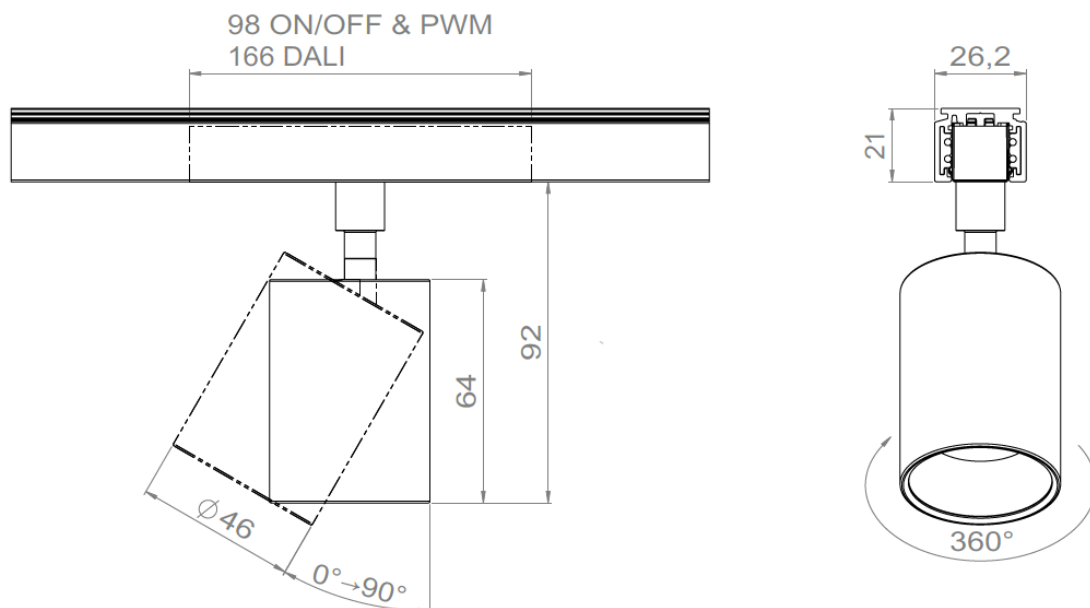

MYSTA ON TRACK 230V

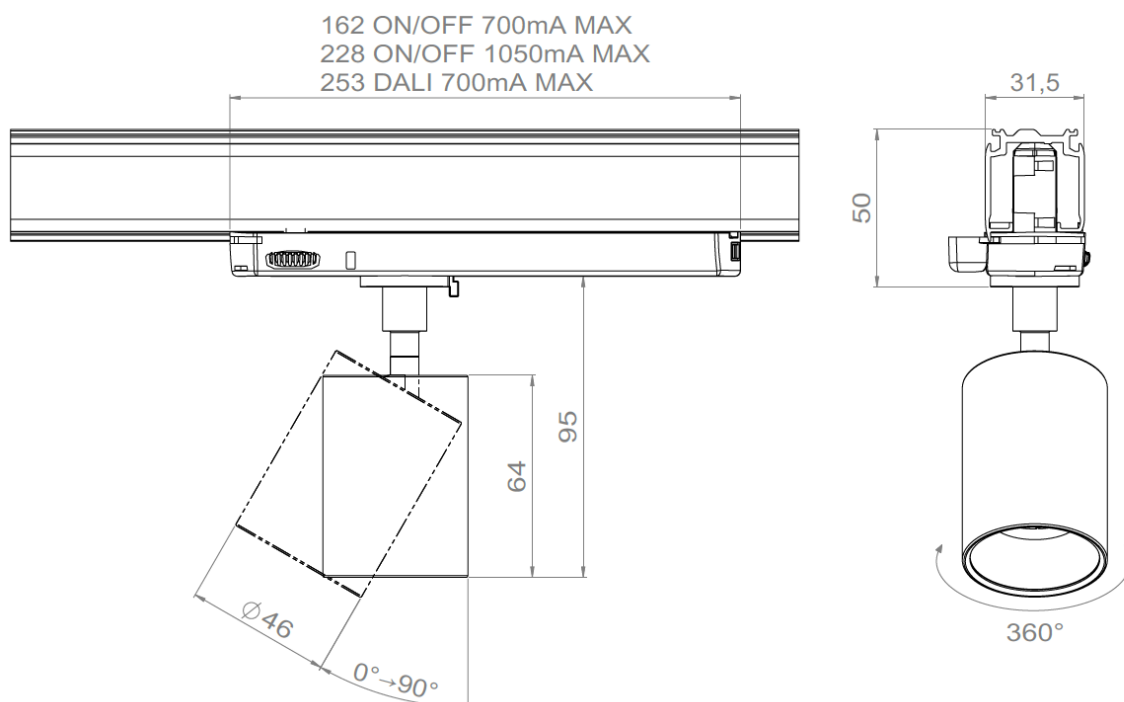

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update : 2025.09.17

5/12


Firalux & LOuss brands

LOuss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

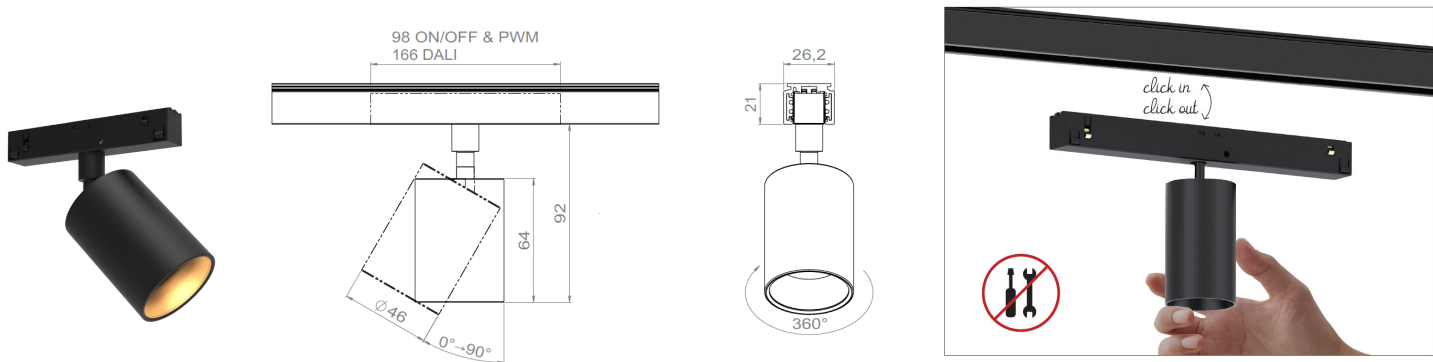

MYSTA ON TRACK 48V-S

Stucchi Tracks (1/3)

Surface / Suspended track

	9500-.../B-ST1-E 9500-.../W2-ST1-E Weight : 0.7 kg/m	
--	--	--



Round track

	9500-.../B-ST15-E 9500-.../W2-ST15-E Weight : 0.92 kg/m	
--	---	--

Recessed tracks

	9500-.../B-ST8-E 9500-.../W2-ST8-E Weight : 0.89 kg/m	
	9500-.../B-ST18-E 9500-.../W2-ST18-E Weight : 1.02 kg/m	

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged
Last update : 2025.09.17

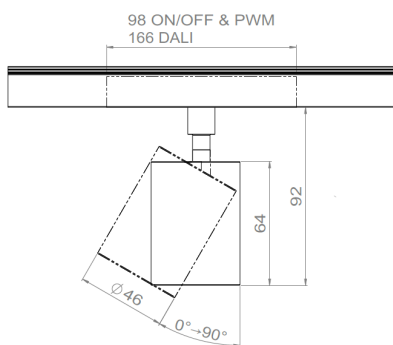

MYSTA ON TRACK 48V-S


Stucchi Tracks (1/3)

Track trimless




9500-.../B-ST3-E
9500-.../W2-ST3-E

Weight : 1.11 kg/m

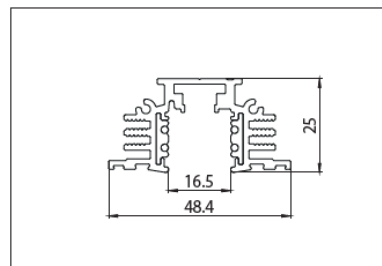


9500-.../B-ST5-E
9500-.../W2-ST5-E


Weight : 1.48 kg/m

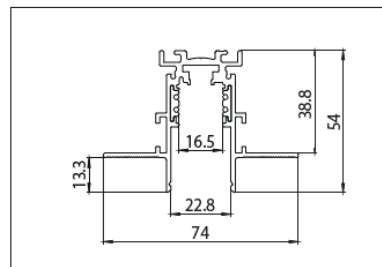


9500-.../B-ST10
Weight : 1.88 kg/m

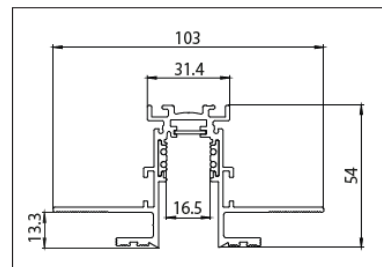

9500-.../B-ST13-E
9500-.../W2-ST13-E
Weight : 1.16 kg/m

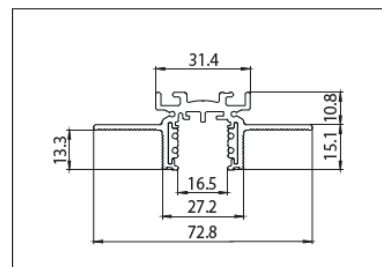

9500-.../B-ST14
Weight : 0.57 kg/foot
1.87 kg/m

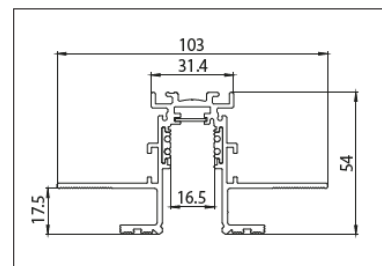

Louss

Last update : 2025.09.17



7/12

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

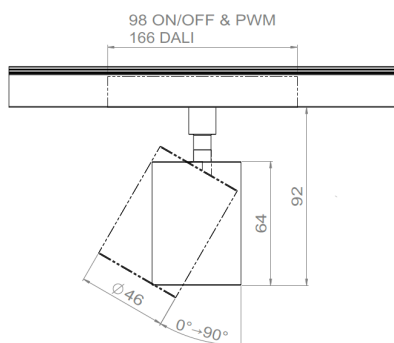

MYSTA ON TRACK 48V-S

Stucchi Tracks (1/3)

Double emission tracks




9500-.../B-ST2-E
9500-.../W2-ST2-E

Weight : 1.02 kg/m



9500-.../B-ST6-E
9500-.../W2-ST6-E

Weight : 0.69 kg/m







9500-.../B-ST7-E
9500-.../W2-ST7-E

Weight : 1.13 kg/m



9500-.../B-ST9-E
9500-.../W2-ST9-E

Weight : 1.15 kg/m

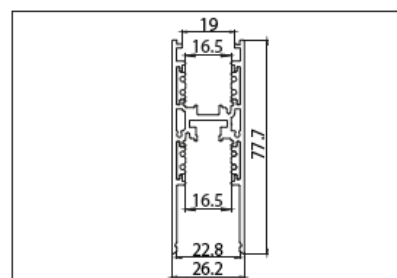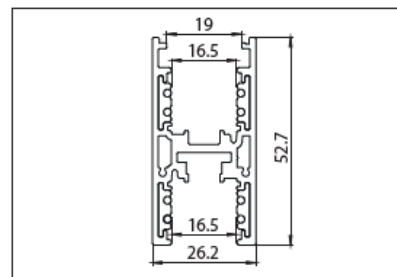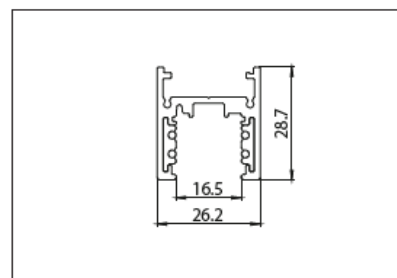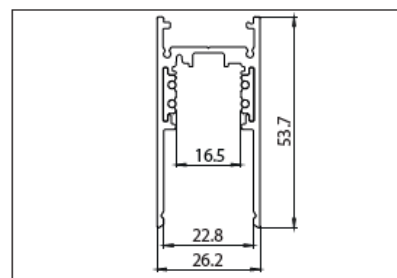

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged
Last update : 2025.09.17

8/12

LOUSS

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Firalux & LOUSS brands


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

MYSTA ON TRACK 48V-S


STUCCHI TRACK EVO SYSTEM – ST1

Installation (1/4)

1 - 9500-.../...-ST1





CODE	L mm [ft]
9500-1/...-ST1-E	1000 [3.28]
9500-2/...-ST1-E	2000 [3.28]
9500-3/...-ST1-E	3000 [3.28]



2 - USE


Ceiling




Wall





Suspended





3 - CEILING FIXING

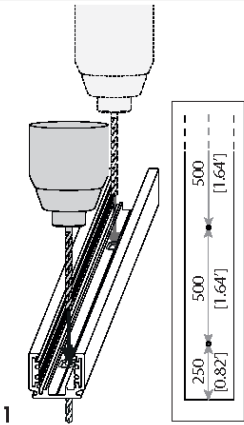








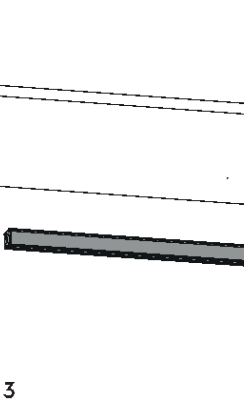





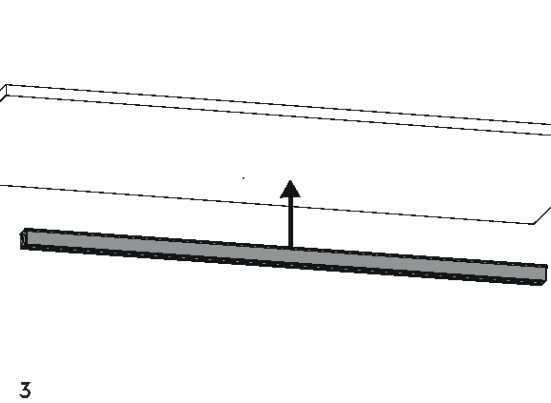

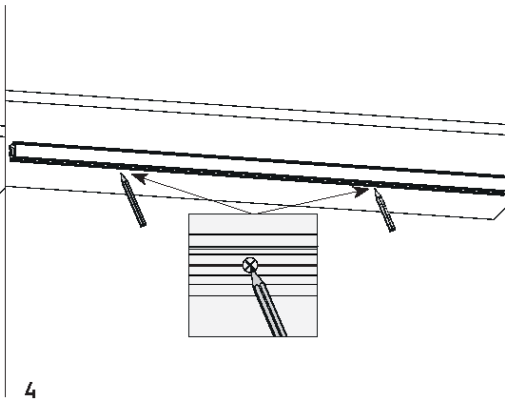

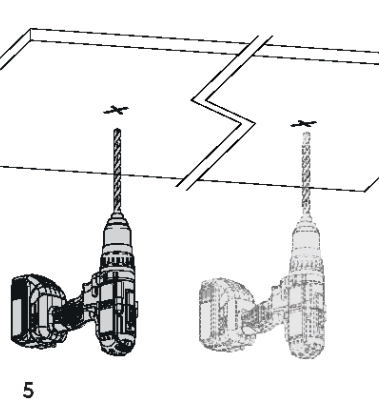

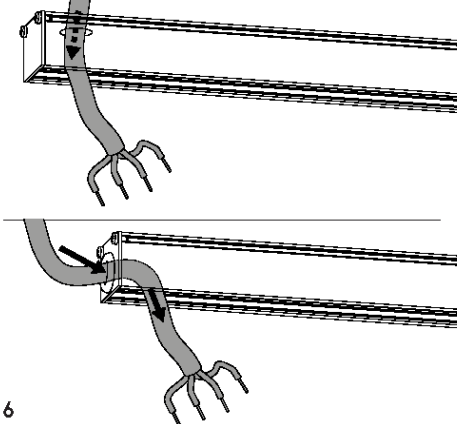

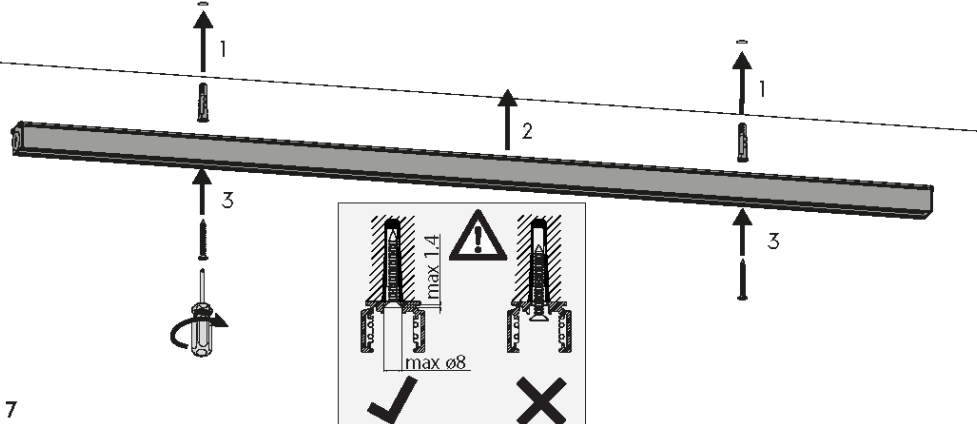


MYSTA ON TRACK 48V-S



STUCCHI TRACK EVO SYSTEM – ST1

Installation (1/4)


4 - SUSPENDED FIXING

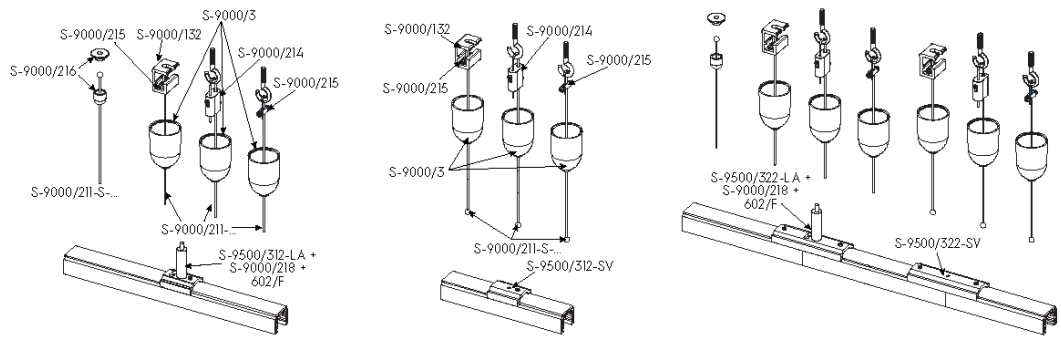


MAX LOAD

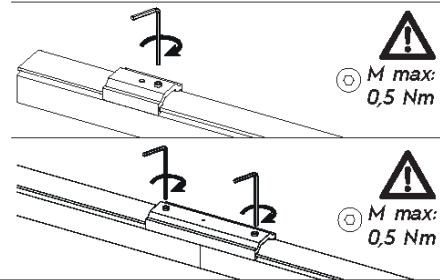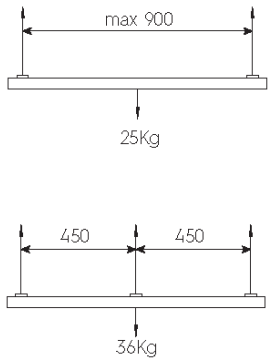


DISTRIBUTED LOAD

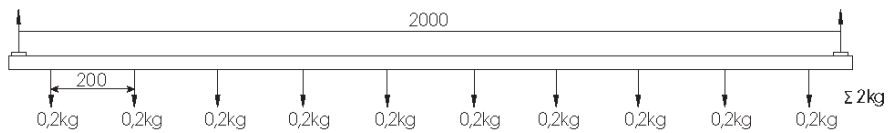


5 - 9503...

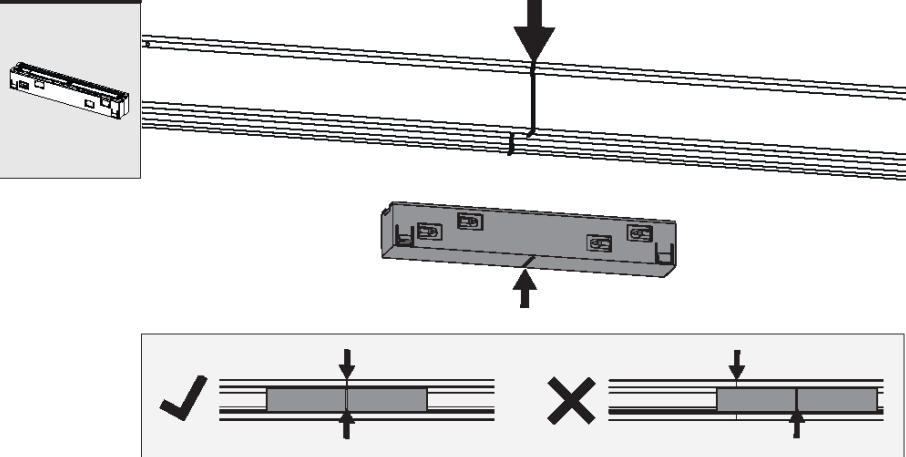


TRACK POLARITY

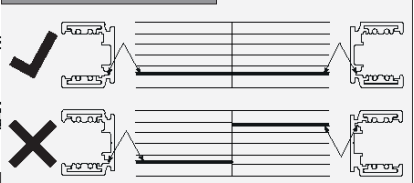

ALIGNMENT (ceiling)

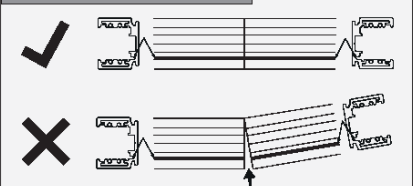

6 - CUTTING

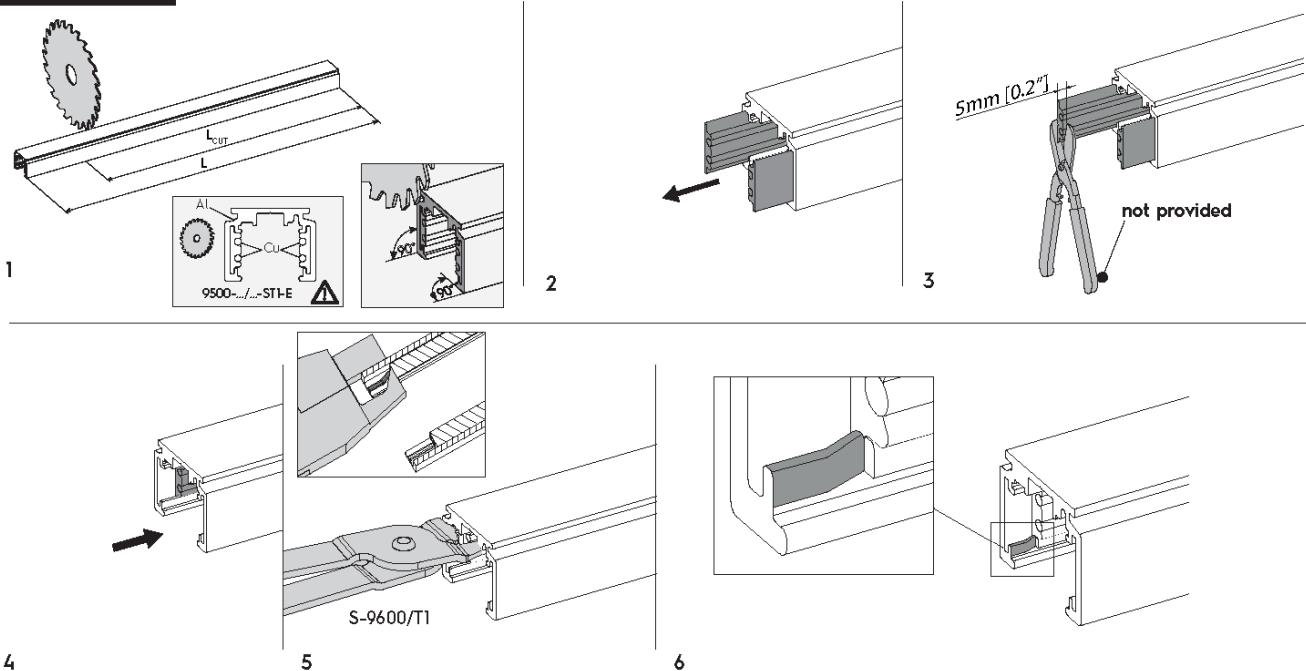


MYSTA ON TRACK 48V-S


STUCCHI TRACK EVO SYSTEM – ST1

Installation (1/4)

7 - 9501-S/...-E

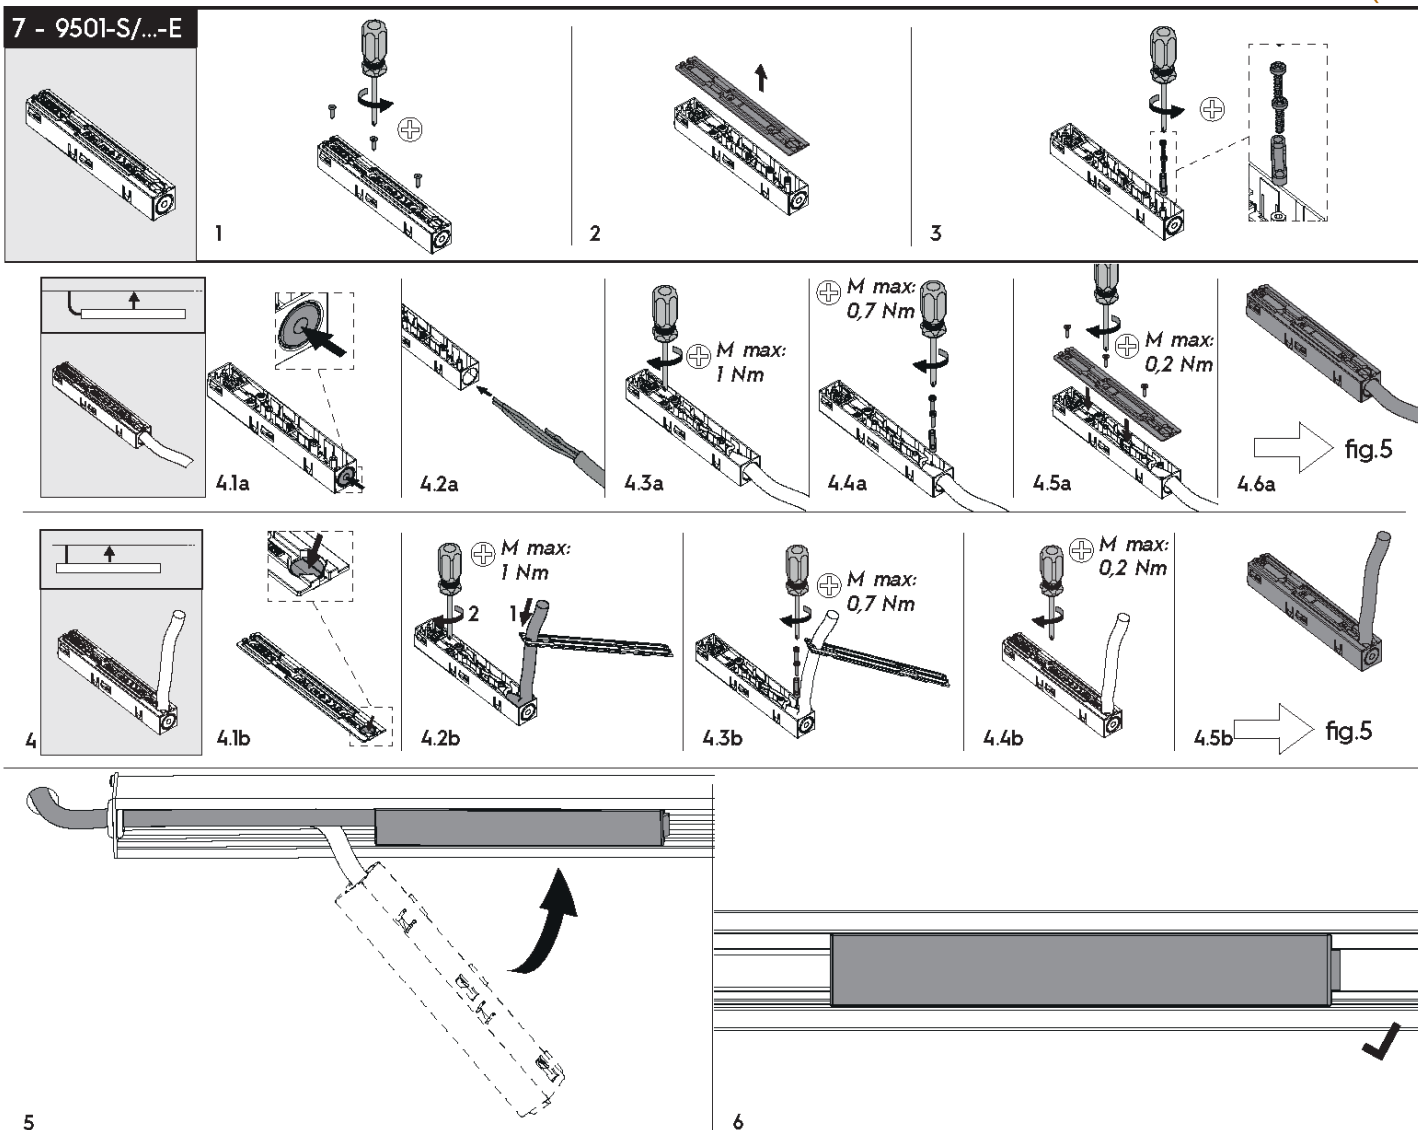


8 - 90° ANGLE

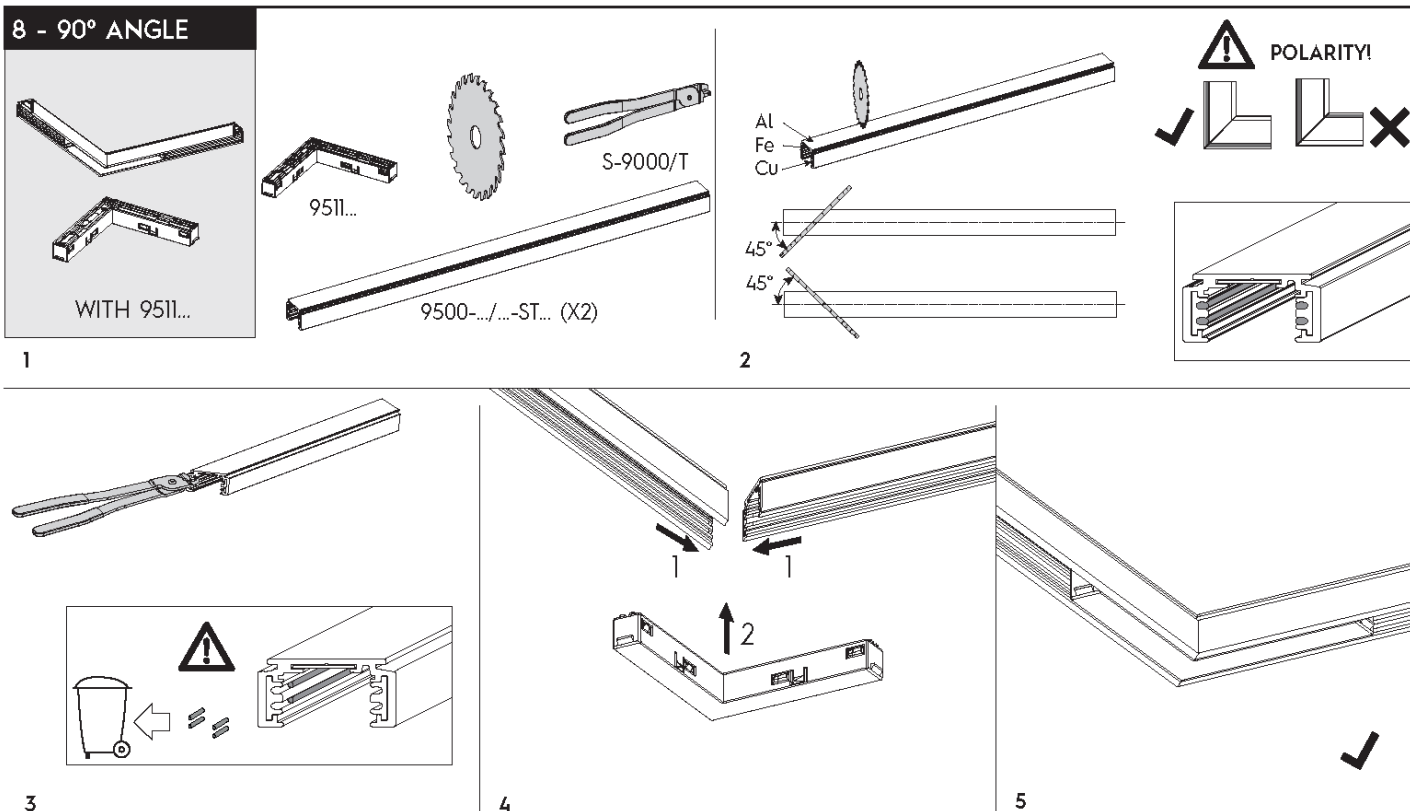



MYSTA ON TRACK 48V-S

STUCCHI TRACK EVO SYSTEM – ST1


Installation (1/4)




1

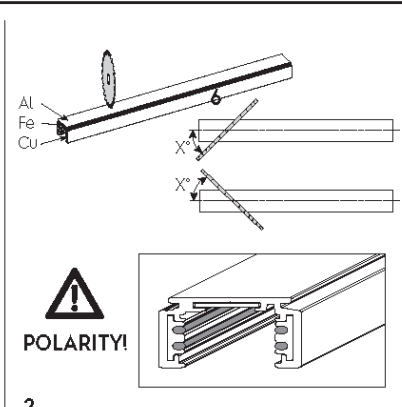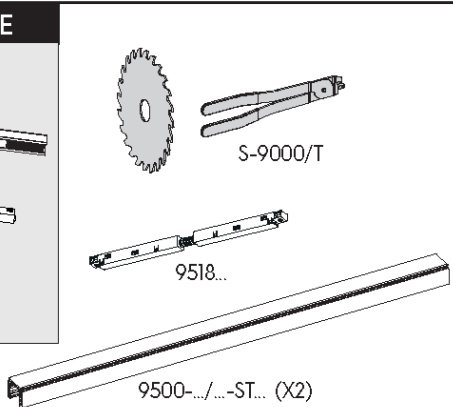


2

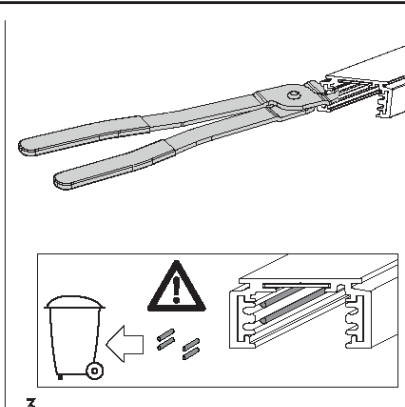


3

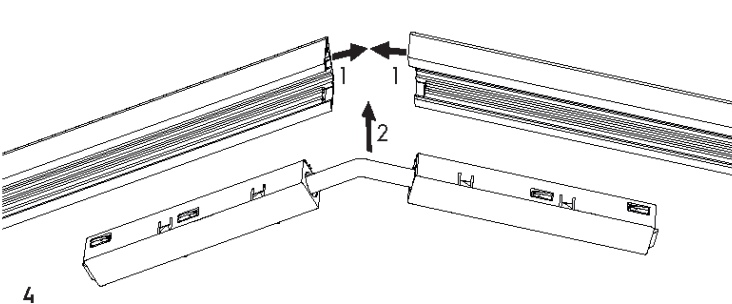



4

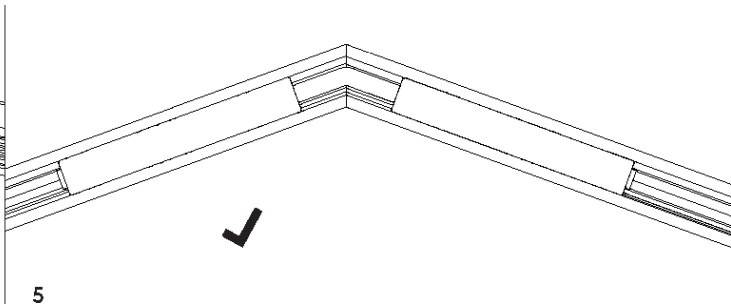


5




1

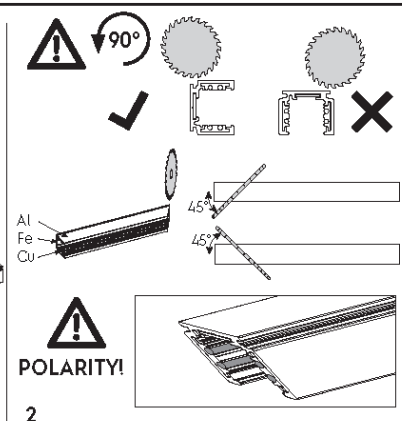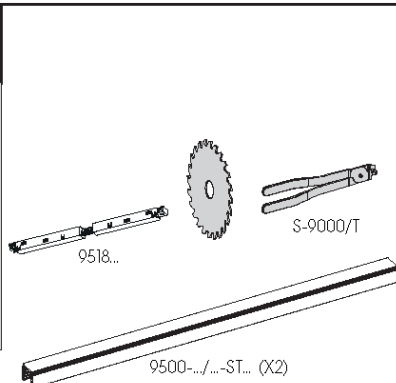


2

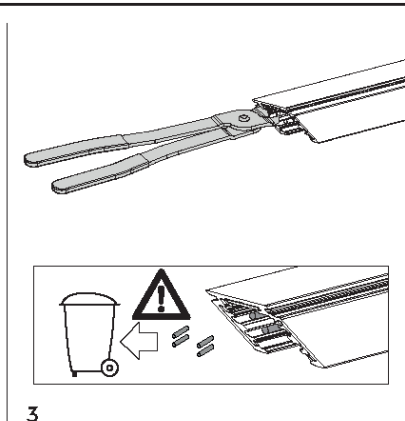

3

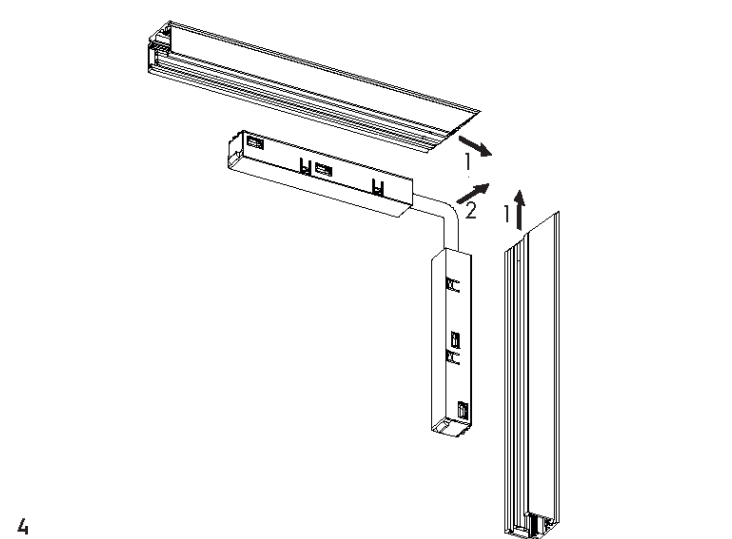

4

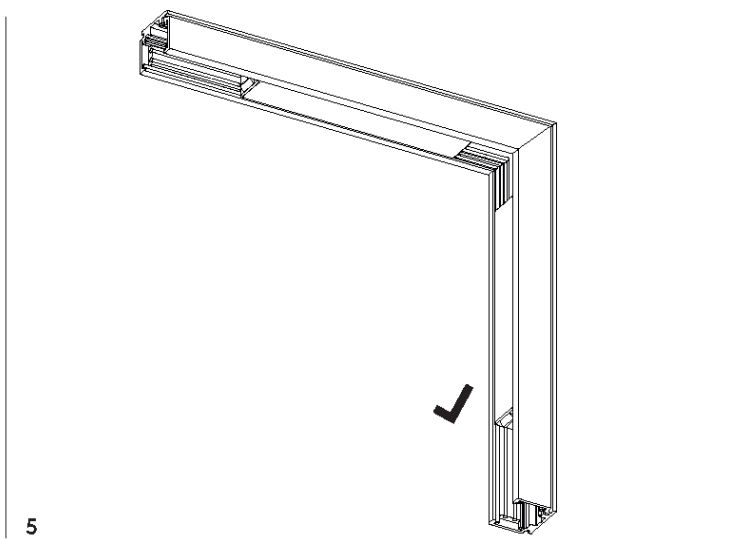

5