



ROME I
Surface-mounted



ROME I
Recessed



ROME II
Surface-mounted Magnetic



ROME II
Recessed

ROME RANGE





ROME I
Surface-mounted



ROME I
Recessed



ROME II
Surface-mounted
Magnetic



ROME II
Recessed

Range	Architectural floodlighting	
Description	Rome I	Rome II
	Aluminum body Stainless steel fixing clip (Surface-Mounted) or Aluminum recessing box (Recessed) Extra-clear or striated glass 2x3in1 LEDs	Aluminum body Magnets (Surface-mounted Magnetic) or Aluminum recessing box (Recessed) Extra-clear glass 8 LEDs
Finish	Paint – RAL 1013 or RAL 7030 (other upon request)	
Dimensions	Rome I • Surface-mounted	Rome I • Recessed
	Length : 65.0mm Width : 35.6mm Height : 35.0mm 38.1mm (fixing clip included)	Length : 67.6mm (box included) Width : 37.6mm (box included) Height : 50.8mm (box included)
	Rome II • Surface-mounted Magnetic	Rome II • Recessed
	Length : 90.0mm Width : 50.0mm Height : 50.0mm 54.5 à 56.5mm (magnets included)	Length : 94.0mm (box included) Width : 53.0mm (box included) Height : 70.0mm (box included)
Weight	Rome I	Rome II
	0.17 kg (without fixing clip / recessing box)	0.50 kg (without magnets / recessing box)
LED characteristics	2x3in1 LEDs or 8 LEDs : 2200K – 2700K – 3000K – 4000K (other upon request) CRI 90	
Optical beams	Rome I	Rome II
	• Elliptical + extra-clear glass • Optic + filter + extra-clear glass • Optic + striated glass	10° - 15° - 20° - 25° - 30° - 40° - 50° - Elliptical
Connection	Rome I	Rome II
	Supplied with 1m cable (more length upon request) Individual or serial connection on external constant current driver	Supplied with 1m cable (more length upon request)

All the connections have to be made before powering up,
otherwise the luminaire could be seriously damaged.



ROME I
Surface-mounted



ROME I
Recessed



ROME II
Surface-mounted
Magnetic



ROME II
Recessed

Separate power supply	Rome I	Rome II
	350mA max. external constant current driver For the US & Canada use a UL class 2 driver	48VCC external power supply For the US & Canada use a UL class 2 power supply
LED power	Rome I	Rome II
	6W max.	20W max.
Use limitations	The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in	

All the connections have to be made before powering up,
otherwise the luminaire could be seriously damaged.

LOuss

Creation : 2019.07.19 / Last update : 2025.07.29

3/5



BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss



Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



ROME I Surface-mounted

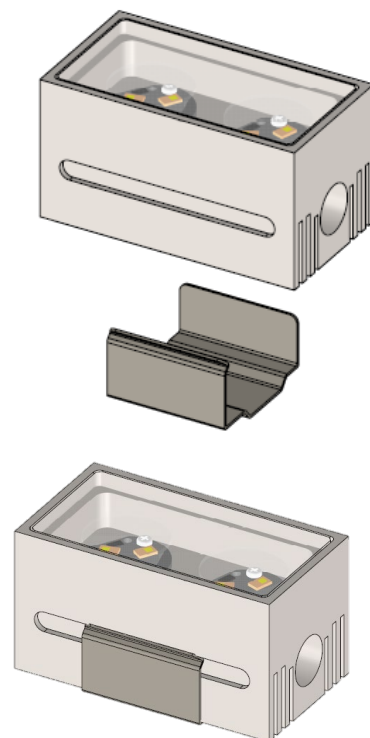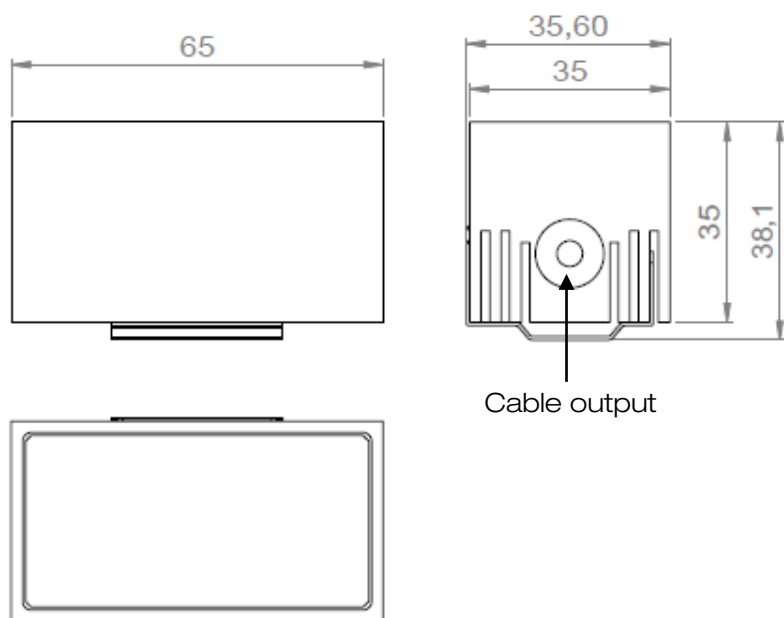

ROME I Recessed

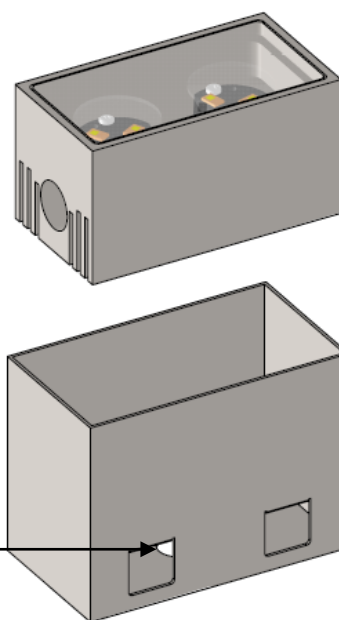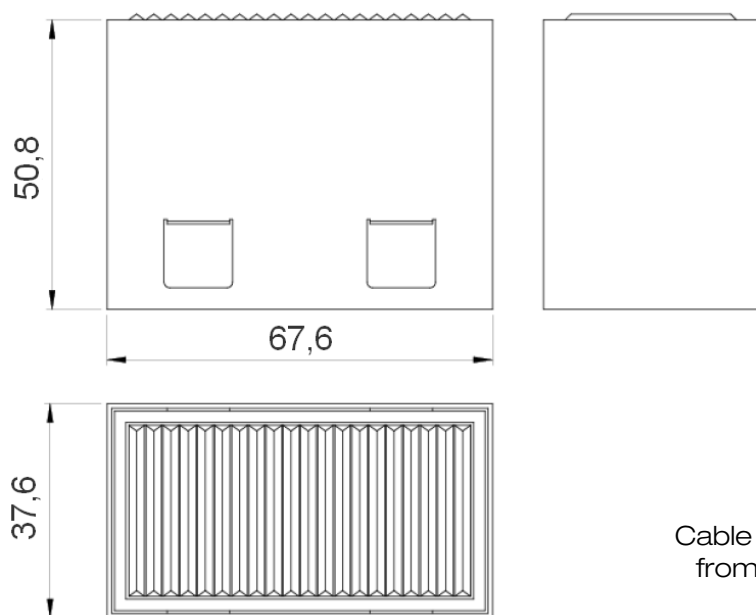

All the connections have to be made before powering up,
otherwise the luminaire could be seriously damaged.

lOuss

Creation : 2019.07.19 / Last update : 2025.07.29

4/5



BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



ROME II Surface-mounted Magnetic

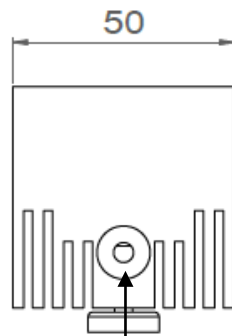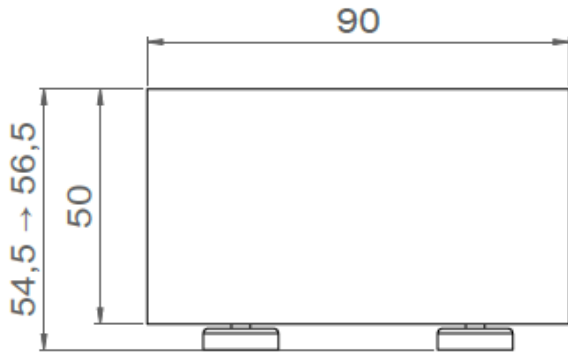


Cable output

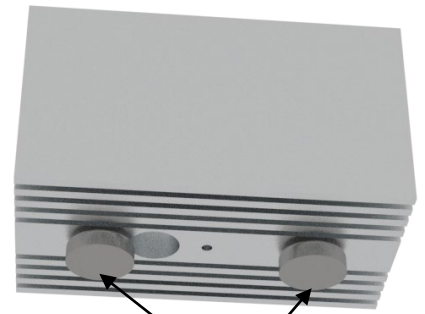




Magnets



ROME II Recessed

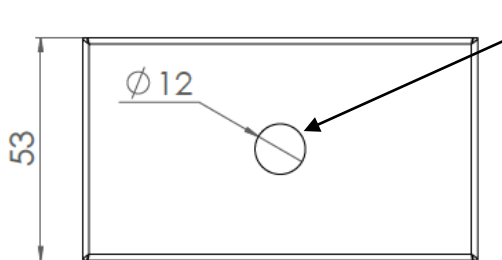

Cable output
from below

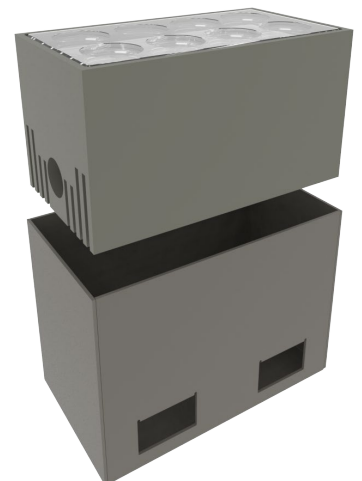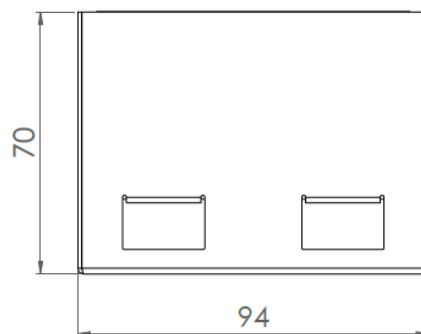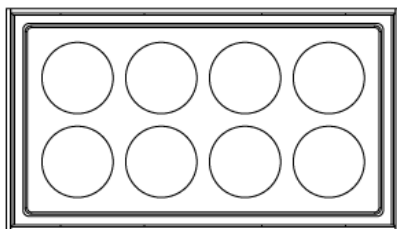

All the connections have to be made before powering up,
otherwise the luminaire could be seriously damaged.

lOuss

Creation : 2019.07.19 / Last update : 2025.07.29

5/5

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE