



# LOUSS

Lighting Emotion

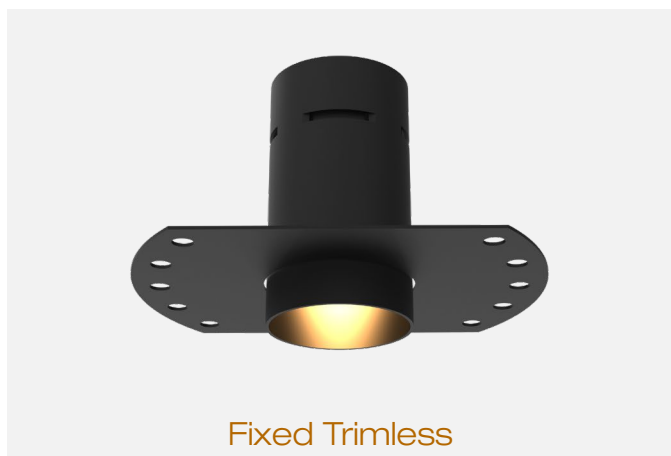

UNDO






Solo



Multiple



Recessed  
Magnetic Trim

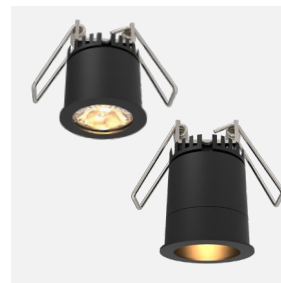

Recessed Trim



Fixed Trimless

## UNDO

<b>Range</b>	High power versatile luminaires for accent lighting, dedicated to precision lighting & highlighting of showcases		
<b>Description</b>	<b>Solo &amp; Multiple</b>	<b>Recessed Magnetic Trim</b>	
	Spotlights versions : <ul style="list-style-type: none"> <li>• Standard</li> <li>• Standard with accessories</li> <li>• Low Luminance</li> <li>• Low Luminance with accessories</li> </ul> Orientation 360° - Adjustable tilt 115° Spotlight(s) mounted on a metallic bar using fixing bracket(s)	Screw-in insert Magnetic spotlight	
	<b>Recessed Trim</b>	<b>Fixed Trimless</b>	
	Fixation with springs Standard or Low Luminance version	Mounting frame Simple straight or tilted version (10°-15°-20°) Double version (0° + 15°)	
<b>Finish</b>	Black anodized aluminum matt finish (other upon request)		
<b>Dimensions</b>	<b>Solo &amp; Multiple</b>	<b>Recessed Magnetic Trim</b>	
	<b>Dimensions per spotlight</b> Diameter : 39.5mm Length : 37.1mm (Standard) 40.4mm (Standard + accessories) 52.2mm (Low Luminance) 55.4mm (LL + accessories)  <b>Bar dimensions</b> Width : 8mm (without fixing brackets) Height : 8mm (without fixing brackets) Total height : 79mm max. (spotlight + bar)	External diameter : 51mm Spotlight diameter : 43mm Installation diameter : 45mm Installation depth : 51mm	
	<b>Recessed Trim</b>	<b>Fixed Trimless</b>	
	External diameter : 43.5mm Spotlight diameter : 39.5mm Installation diameter : 39.5mm Installation depth : 57mm (Standard) 73mm (LL)	Spotlight diameter : 44mm Installation depth : 67 to 80mm Fixing plate dimensions : 90 x 140mm 180 x 140mm (Double version)	

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

Creation : 2020.10.19 / Last update : 2025.07.15

LOUSS

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
www.louss.fr  
Best & LOUSS

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE

2/11




Solo



Multiple



Recessed  
Magnetic Trim

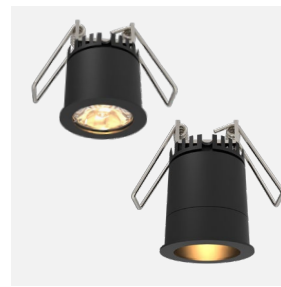

Recessed Trim



Fixed Trimless

## UNDO

<b>LED characteristics</b>	1 LED or 4in1 LED : 2200K – 2700K – 3000K – 3500K – 4000K – 4500K – 5700K (other upon request) Or mix of color temperatures CRI 80 – 90 – 92 – 95 according to version
<b>Optical beams</b>	3.3° - 7° - 11° - 16° - 17° - 21° - 23° - 29° - 31° - 33° - 35° - 42° - 56° - 60° - Asymmetrical
<b>Accessories</b>	Filters, honeycomb grid upon request
<b>Connection</b>	Supplied with 0.5m cable (more length upon request) Individual or series connection on external constant current driver
<b>External power supply</b>	700mA max. External constant current driver For the US & Canada use a UL class 2 driver
<b>LED power</b>	9W at 700mA max.
<b>Use limitations</b>	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
<b>Warranty</b>	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

Creation : 2020.10.19 / Last update : 2025.07.15

LOuss

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOuss


Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE

3/11




## UNDO SOLO UNDO MULTIPLE


### Spotlights dimensions

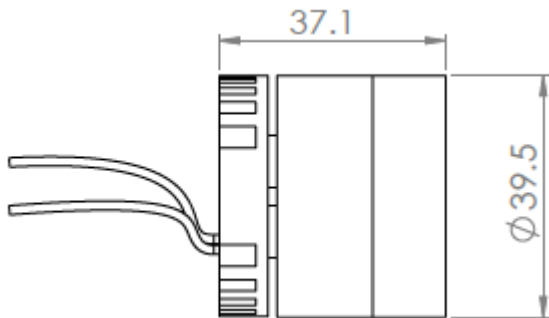


Standard version

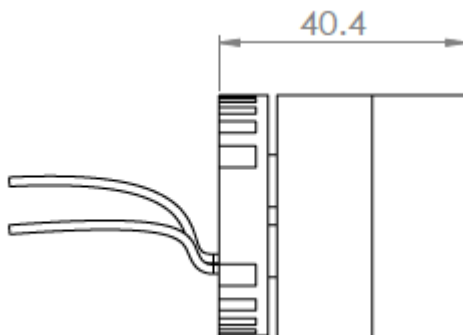

Standard + accessories version  
(glass, filters, honeycomb grid...)

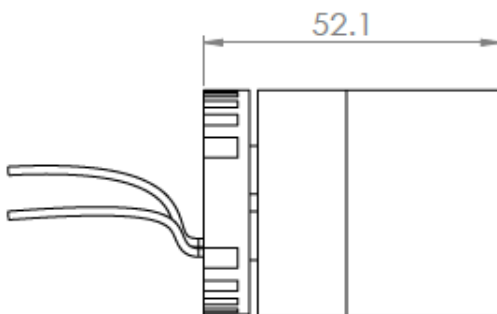

Low Luminance version

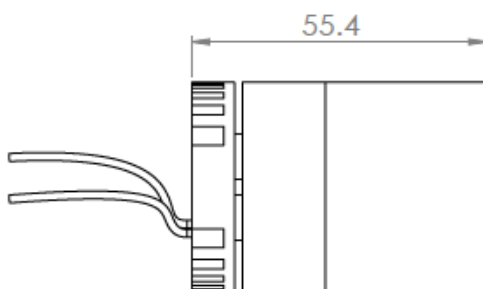

Low Luminance + accessories version  
(glass, filters, honeycomb grid...)

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged.





Creation : 2020.10.19 / Last update : 2025.07.15



## UNDO MULTIPLE

Standard version

Low Luminance + accessories version

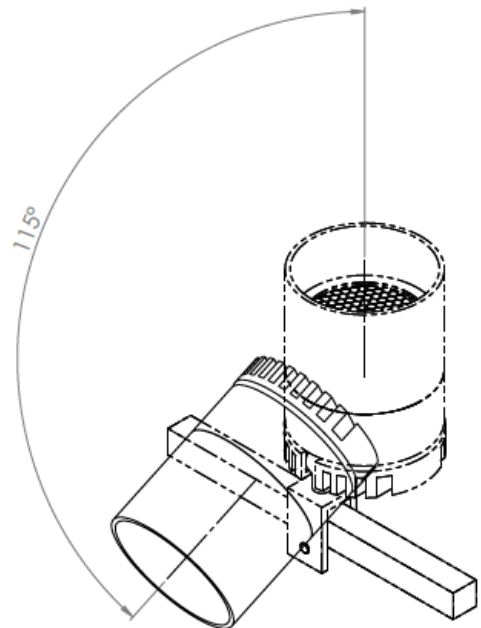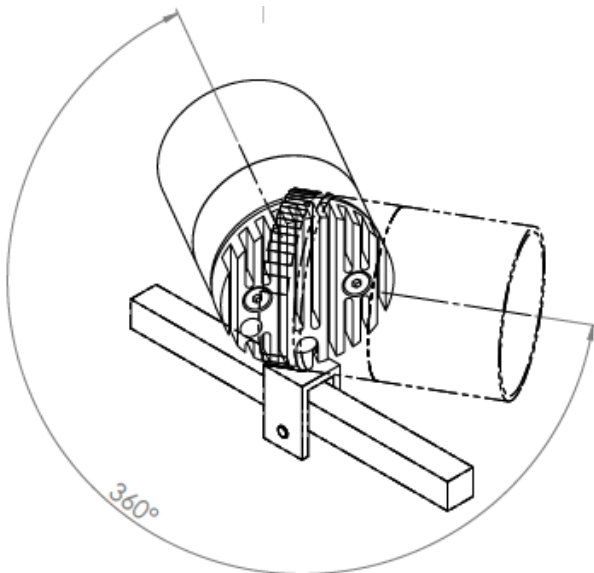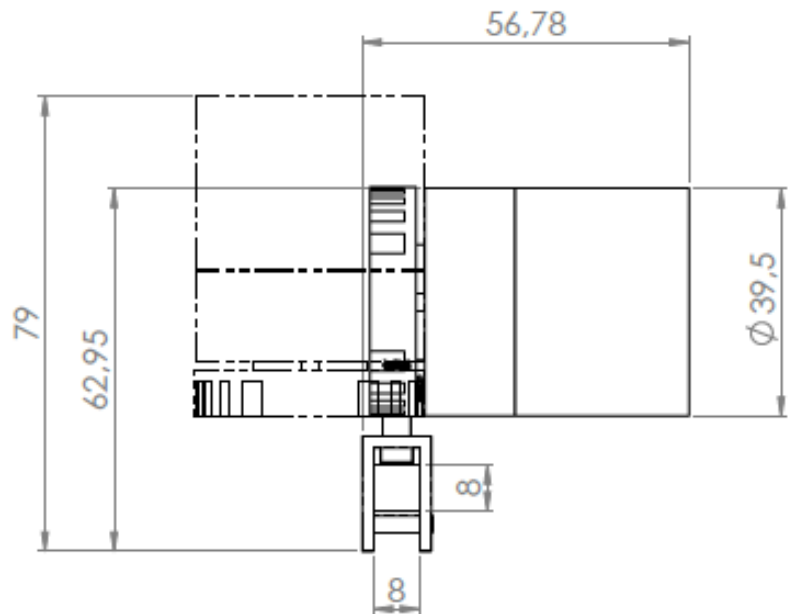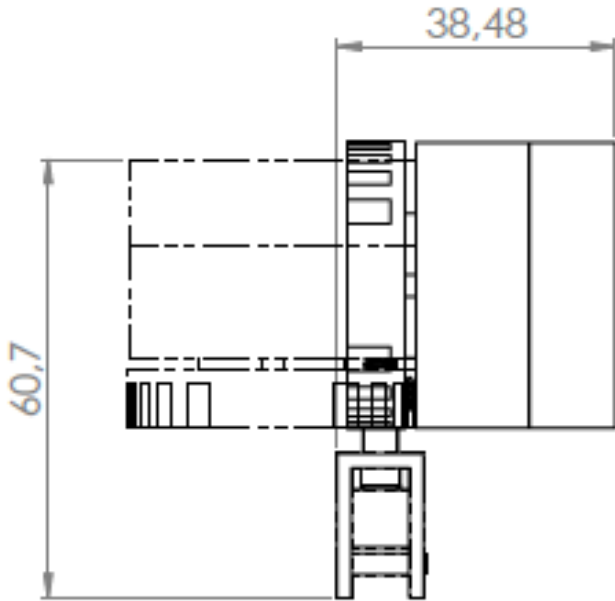

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

Creation : 2020.10.19 / Last update : 2025.07.15

LOUSS

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z


Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE



## UNDO SOLO • MULTIPLE

Installation guide

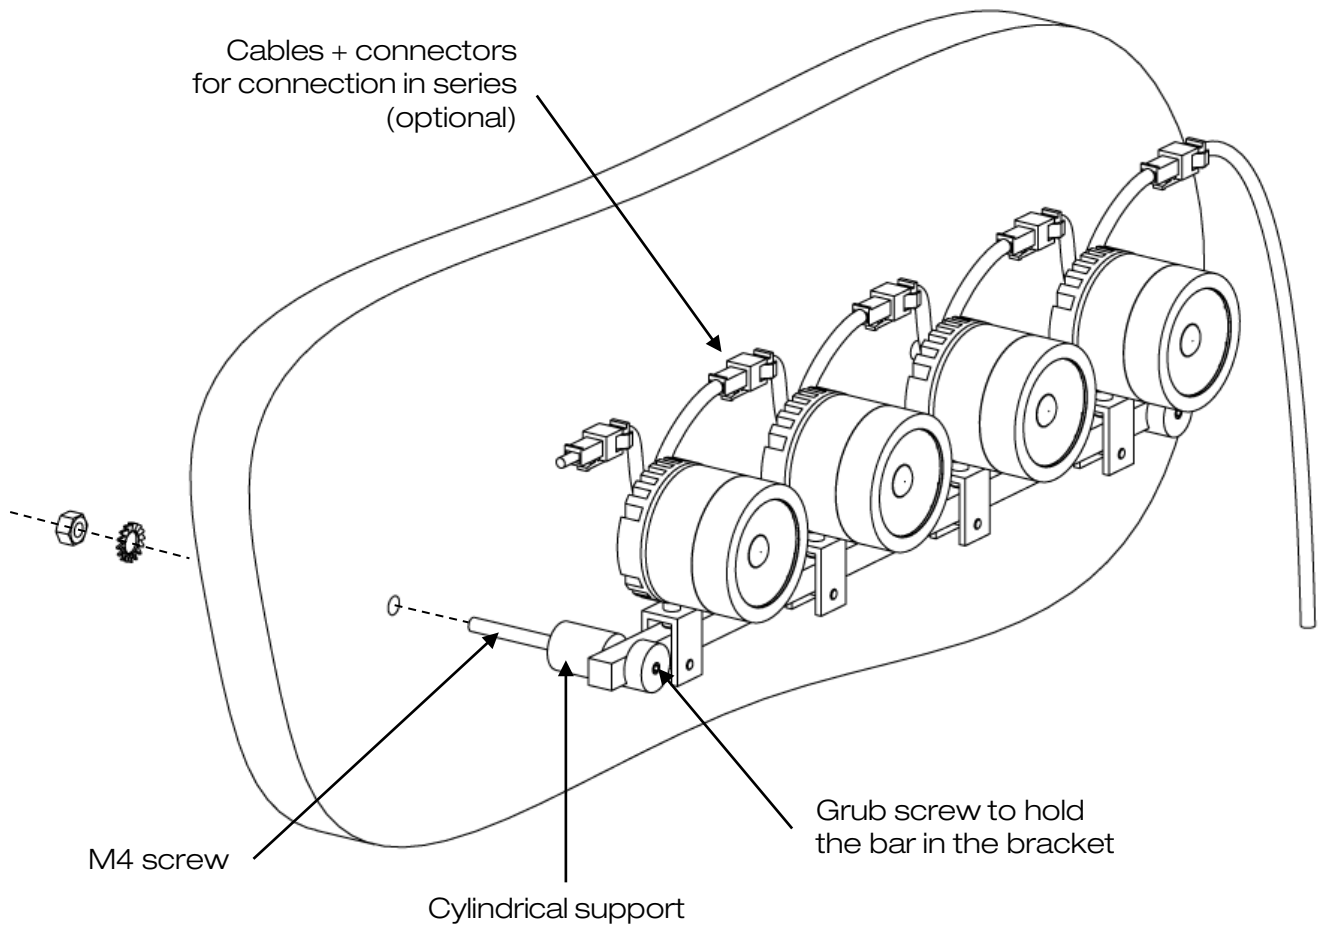

The number of cylindrical supports depends on the length of the bar and the number of spots

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

Creation : 2020.10.19 / Last update : 2025.07.15

LOUSS

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z




Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE



## UNDO RECESSED MAGNETIC TRIM

### Dimensions & Installation guide

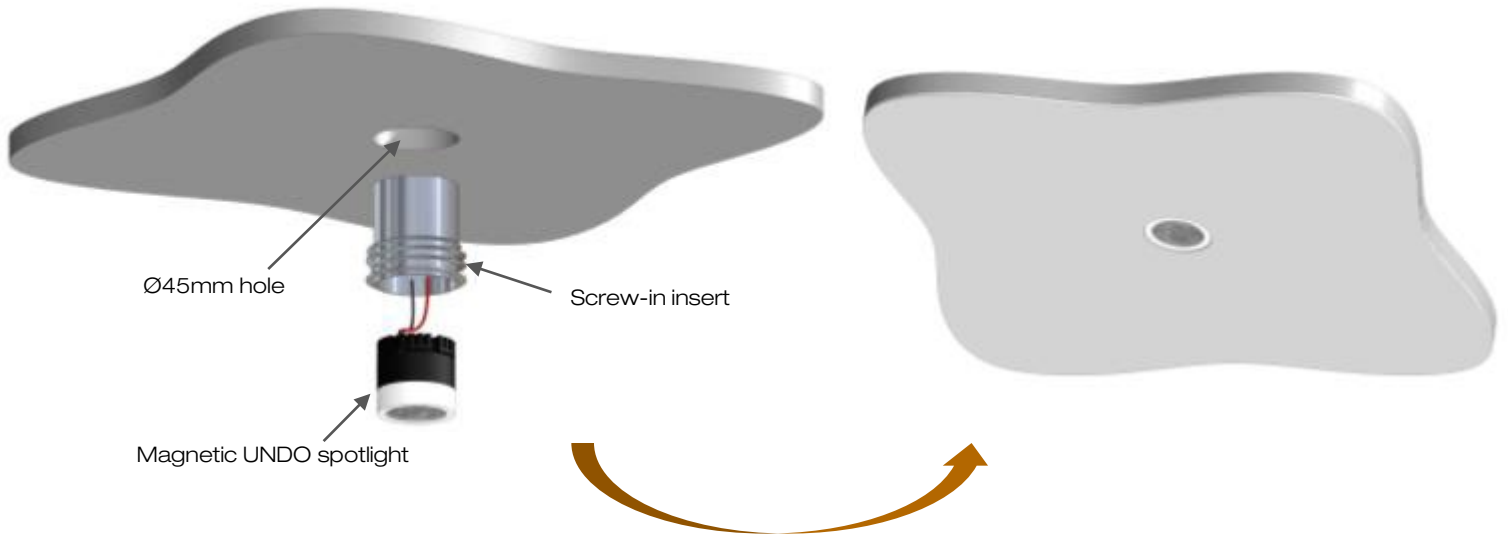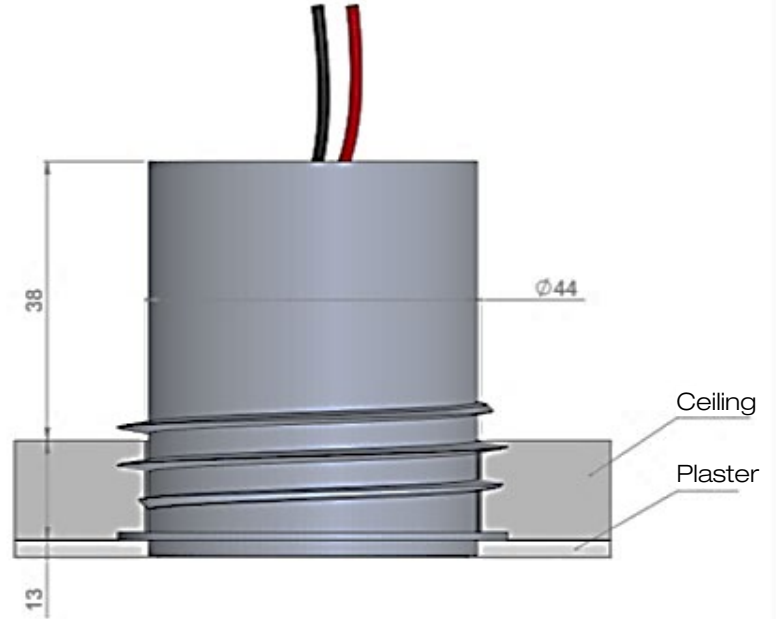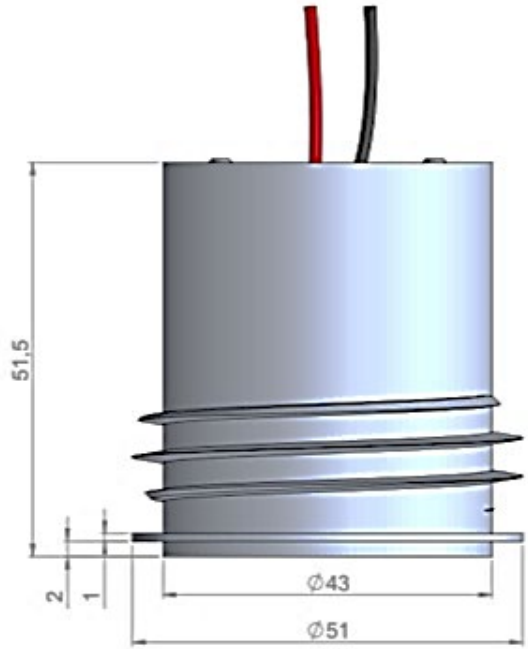

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

Creation : 2020.10.19 / Last update : 2025.07.15

LOUSS

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z



Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE





## UNDO RECESSED TRIM

### Standard version

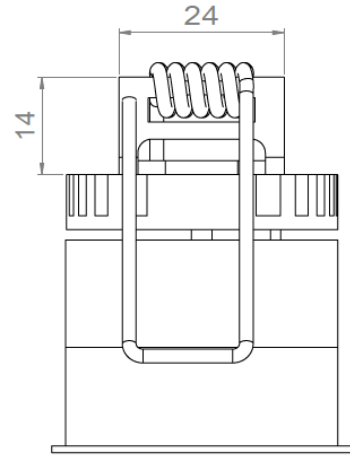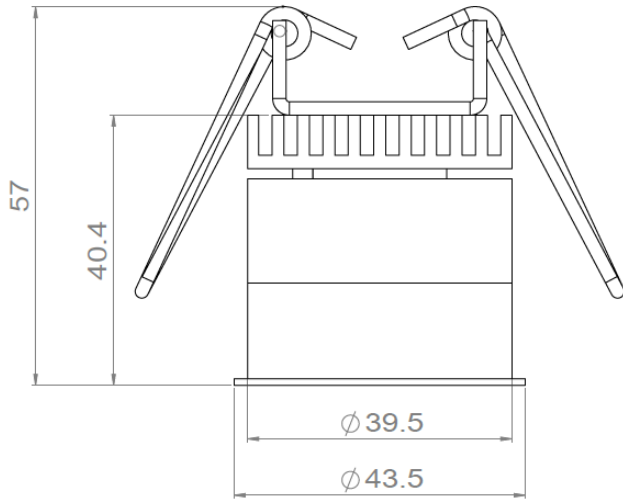

### Low Luminance version

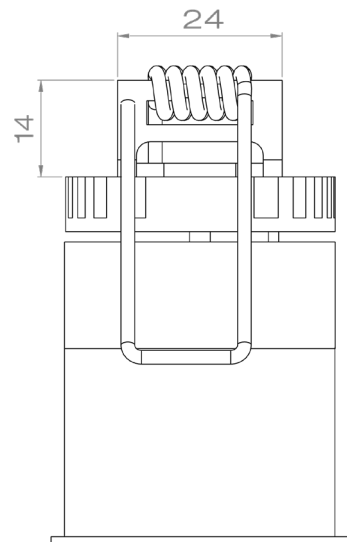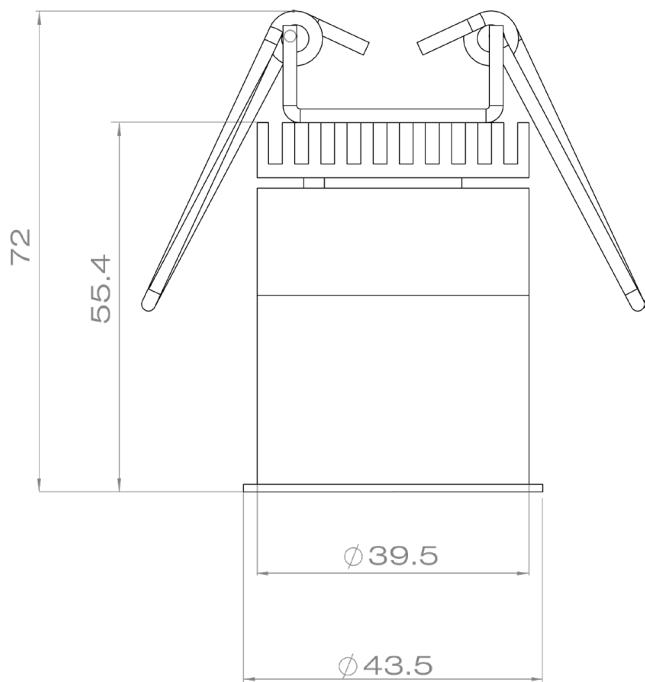

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged.


Creation : 2020.10.19 / Last update : 2025.07.15

LOUSS



BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS


Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE

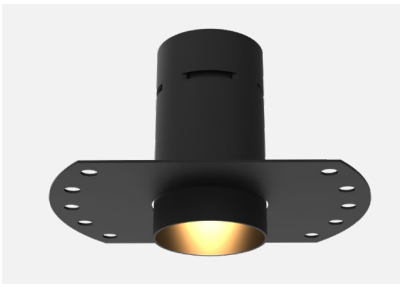




## UNDO FIXED TRIMLESS 0° version

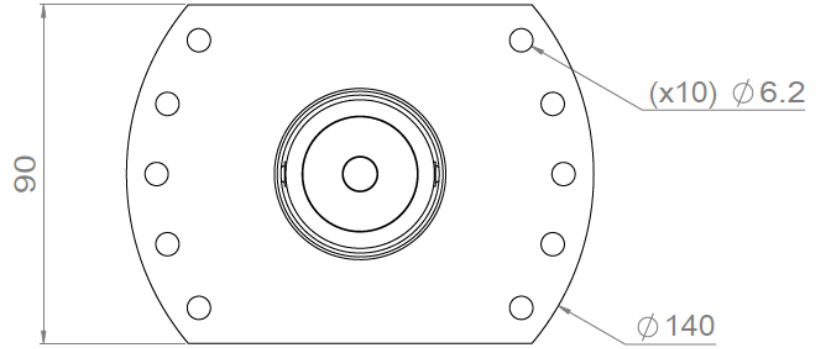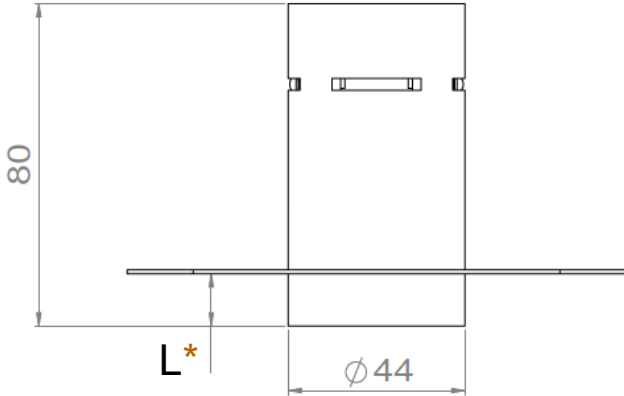

L\* : 1mm to 13mm to be specified when ordering  
(other lengths upon request)

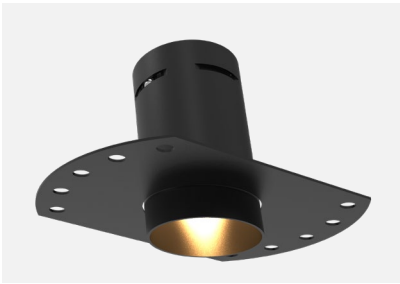

## UNDO FIXED TRIMLESS 10° version

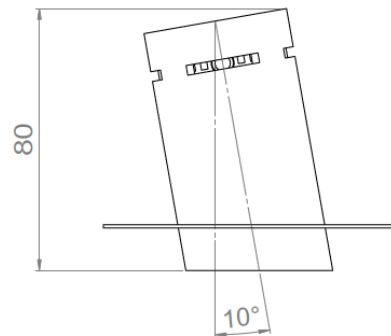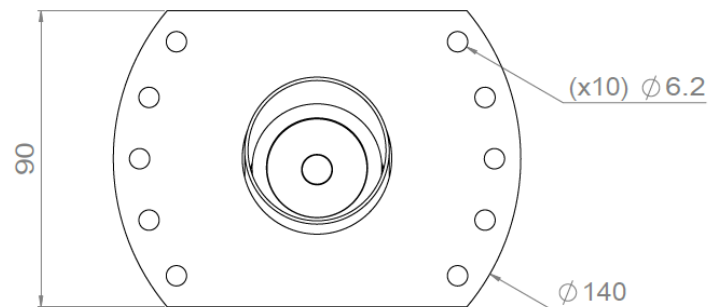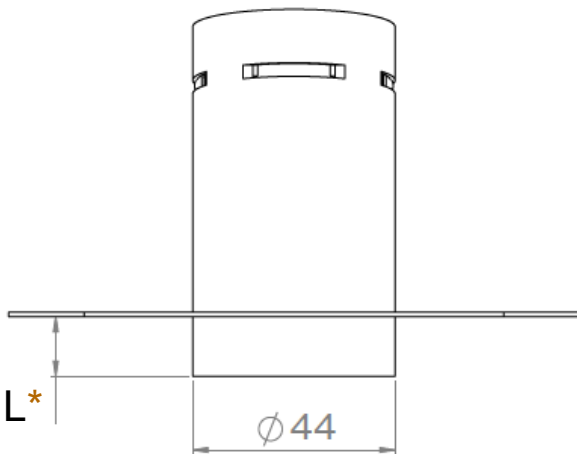

L\* : 1mm to 13mm to be specified when ordering  
(other lengths upon request)

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged.

Creation : 2020.10.19 / Last update : 2025.07.15

LOUSS

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z



Tel. : +33 380 48 65 68  
contact@louss.fr  
www.louss.fr  
Best & LOUSS

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE


9/11





## UNDO FIXED TRIMLESS 15° version

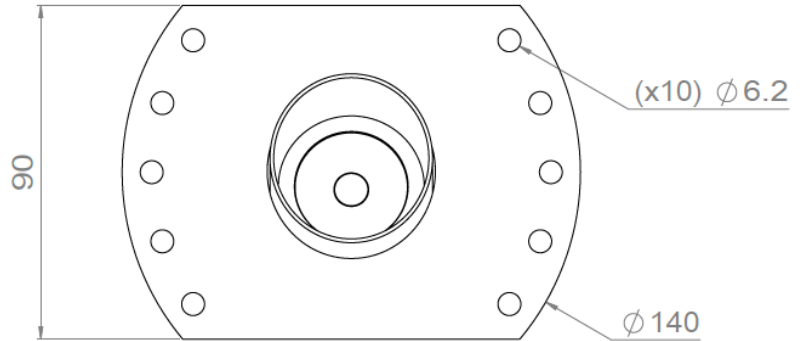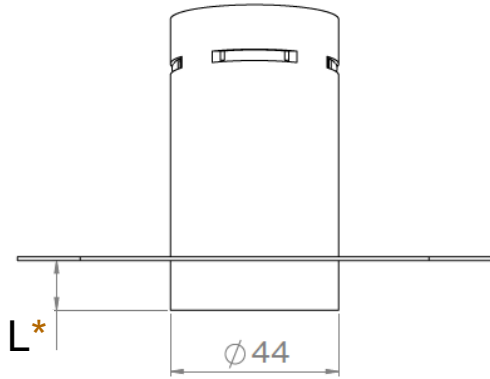


L\* : 1mm to 13mm to be specified when ordering  
(other lengths upon request)

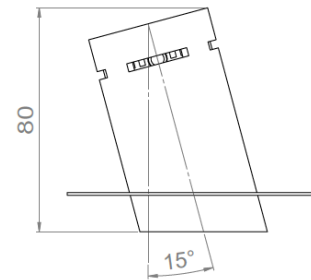

## UNDO FIXED TRIMLESS 20° version

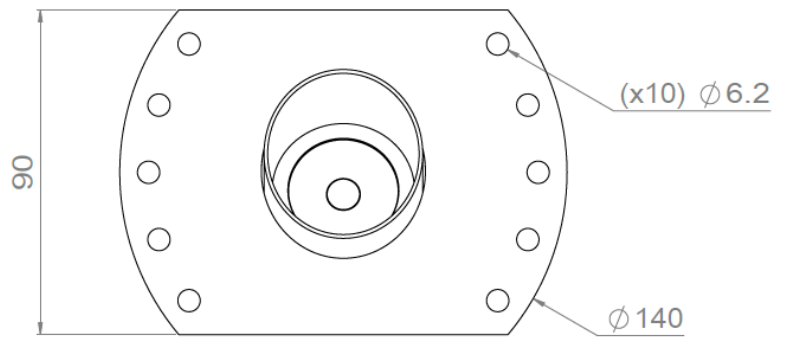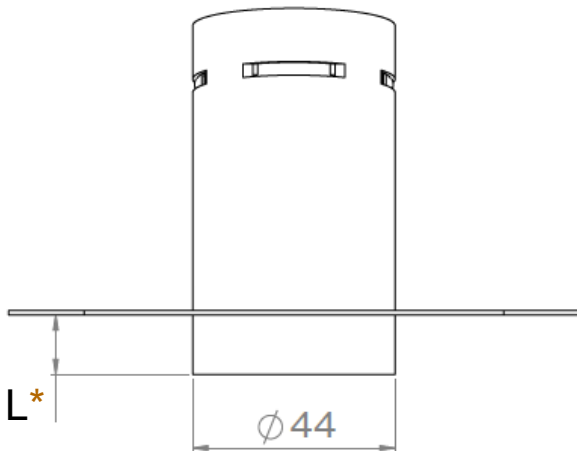

L\* : 1mm to 13mm to be specified when ordering  
(other lengths upon request)

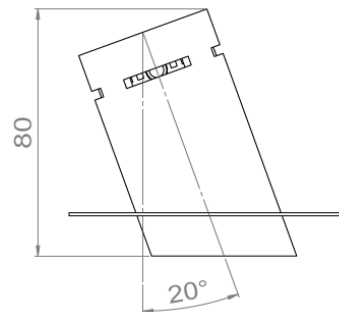

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged.

Creation : 2020.10.19 / Last update : 2025.07.15


LOUSS

10/11




## UNDO FIXED TRIMLESS Installation Guide


### Installation from above

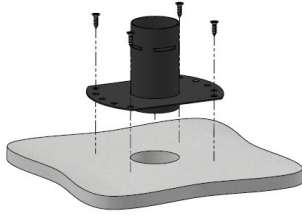


Install the recessed box from above and screw it into the surface

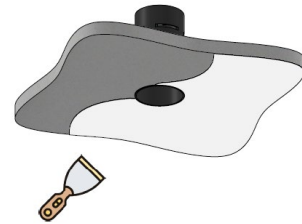

Cover the lateral plates of the recessed box by coating and painting

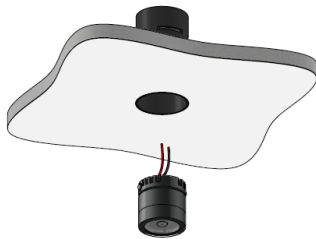


Insert the spotlight from below

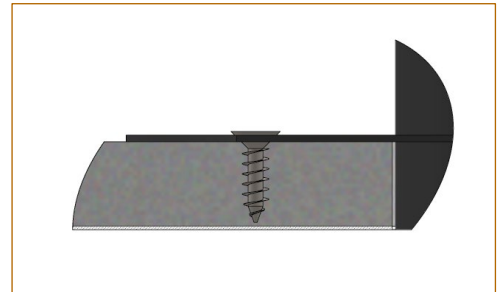


### Installation from below




Install the recessed box from below and screw it into the surface



Cover the lateral plates of the recessed box by coating and painting



Insert the spotlight from below

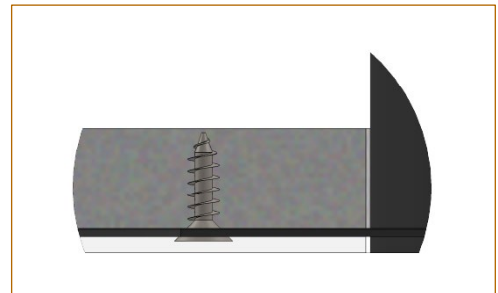

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

Creation : 2020.10.19 / Last update : 2025.07.15