

Wouss

Lighting Emotion



MAGNETIC TRIM




TRIM
Standard • Low Luminance



FIXED TRIMLESS

UNDO RECESSED





UNDO RECESSED • Magnetic Trim • Trim • Fixed Trimless




Range	Luminaires for accent lighting, dedicated to precision lighting & highlighting of showcases		
Description	Anodized aluminum body Magnetic Trim : Screw-in insert + magnetic spotlight Trim : Supplied in Standard or Low Luminance version Fixed Trimless : Straight or Tilted version (10° - 15° - 20°) Double version (0° + 15°)		
Finish	Black anodized matt finish (other upon request)		
	Magnetic Trim	Trim	Fixed Trimless
	External diameter 51mm Spotlight diameter 43mm Installation diameter 45mm Installation depth 51mm	External diameter 43.5mm Spotlight diameter 39.5mm Installation diameter 39.5mm Installation depth 57mm (Standard) 73mm (Low Luminance)	Spotlight diameter 44mm Fixing plate dimensions 90 x 140mm 180 x 140mm (Double version) Installation depth 67 to 80mm
LED characteristics	1 LED or 4in1 LED : 2200K – 2700K – 3000K – 3500K – 4000K – 4500K – 5700K (other upon request) Or mix of color temperatures CRI 80 – 90 – 92 – 95 according to version		
Optical beams	3.3° - 7° - 11° - 16° - 17° - 21° - 23° - 29° - 31° - 33° - 35° - 42° - 56° - 60° - Asymmetrical		
Accessories	Filters, honeycomb grid upon request		
Connection	Supplied with 0.5m cable (more length upon request) Individual or series connection on external constant current driver		
External power supply	700mA max. External constant current driver For the US & Canada use a UL class 2 driver		
LED power	9W at 700mA max.		
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use		
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in		

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.



UNDO RECESSED - MAGNETIC TRIM

Dimensions & Installation guide

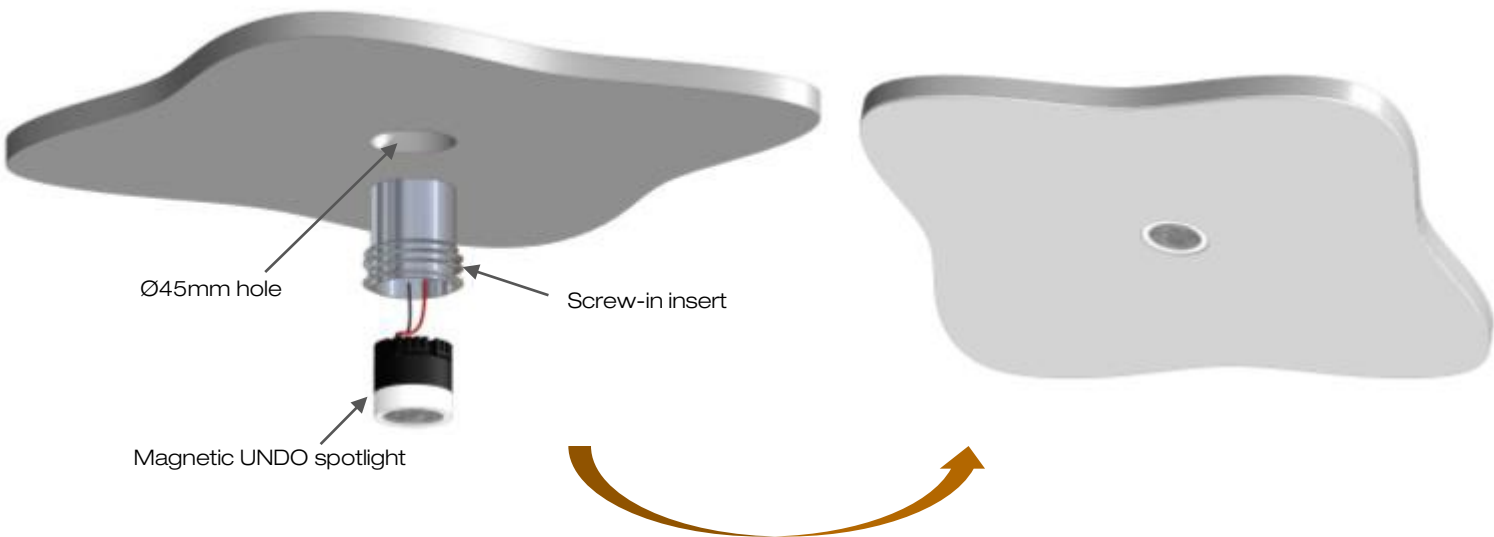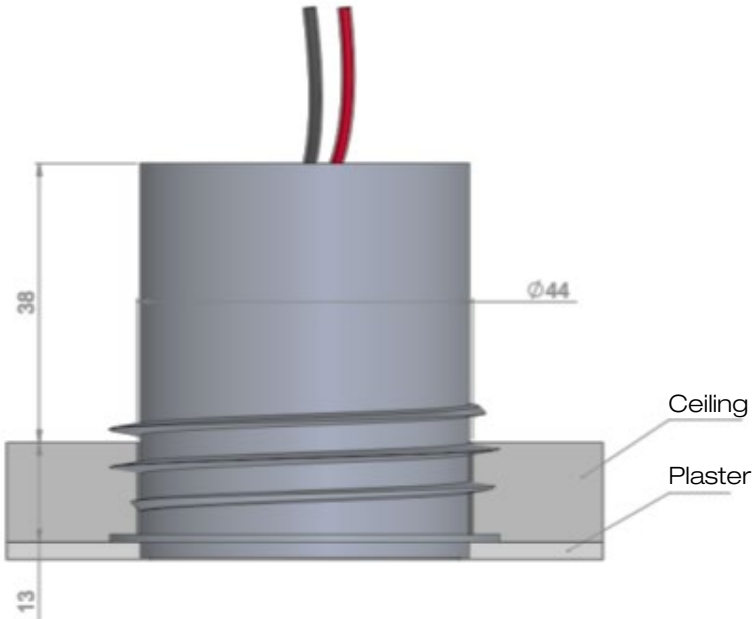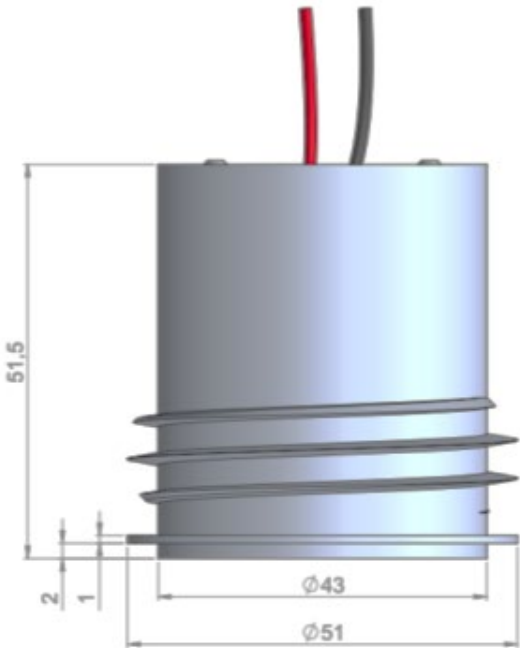

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOuss

Last update : 2025.08.01

3/8

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





UNDO RECESSED - TRIM

Standard version

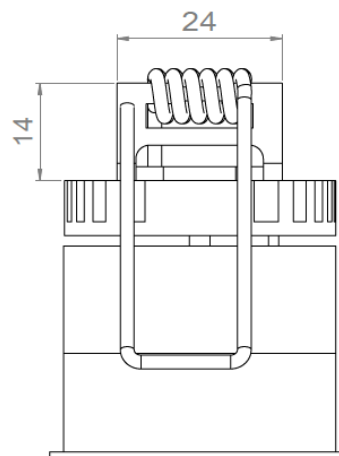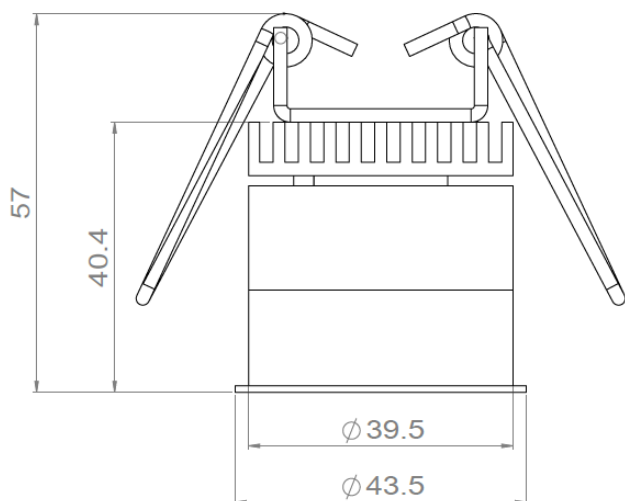

Low Luminance version

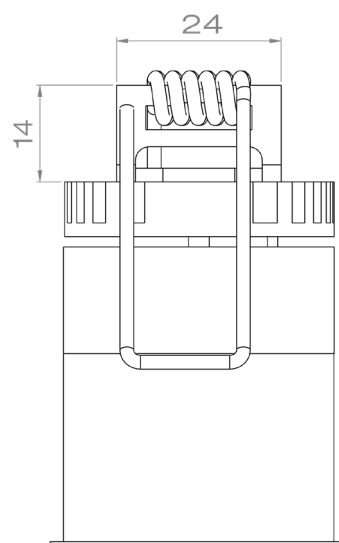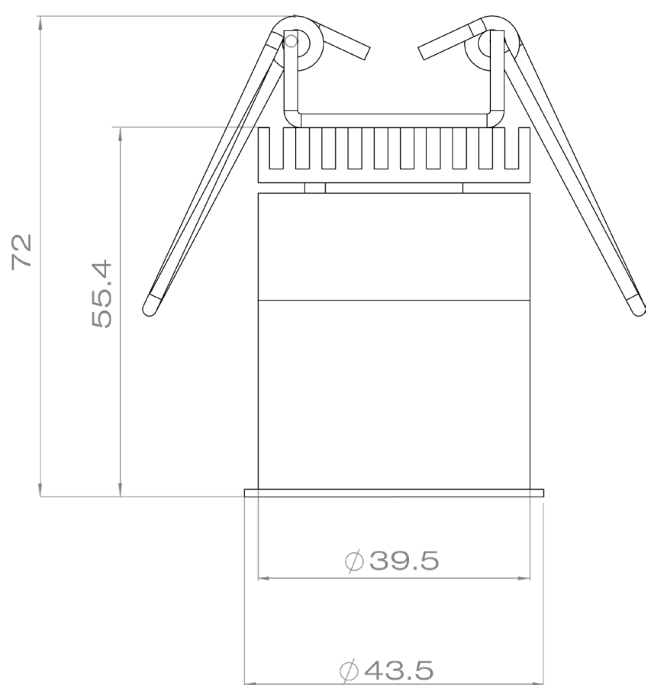

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOUSS

Last update : 2025.08.01

4/8

Firalux & LOUSS brands



SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE






UNDO FIXED TRIMLESS 0° version

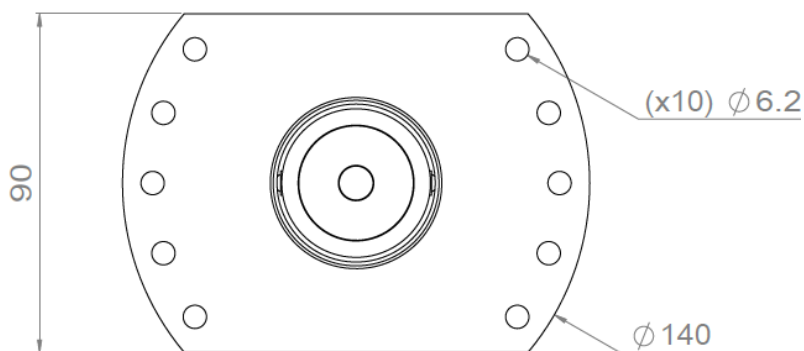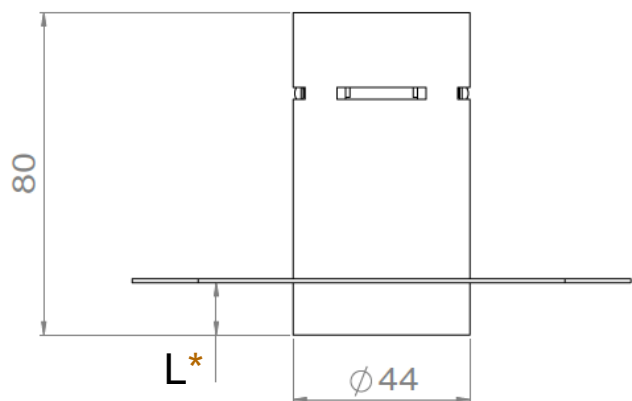

L^* : 1mm to 13mm to be specified when ordering
(other lengths upon request)



UNDO FIXED TRIMLESS 10° version

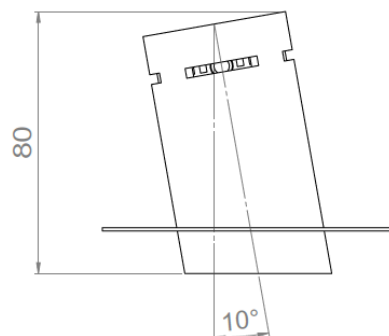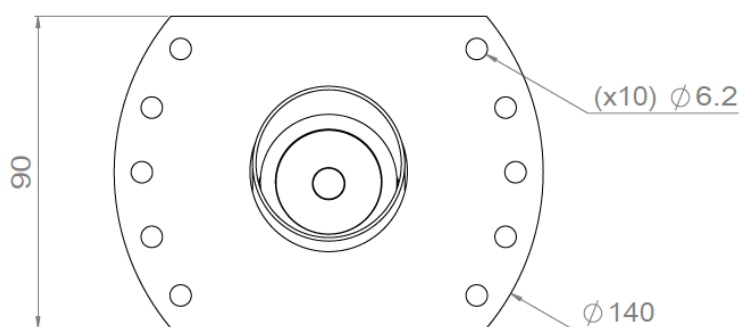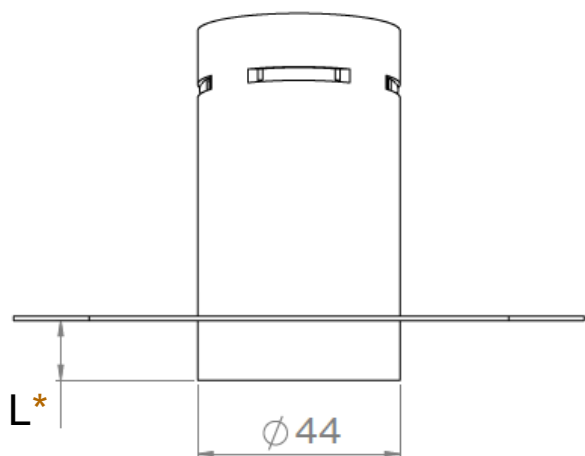

L^* : 1mm to 13mm to be specified when ordering
(other lengths upon request)

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2025.08.01

5/8

Firalux & LOuss brands

LOuss



SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





UNDO FIXED TRIMLESS 15° version

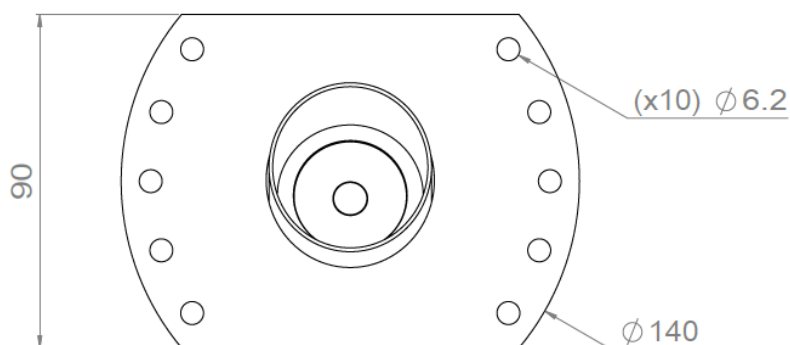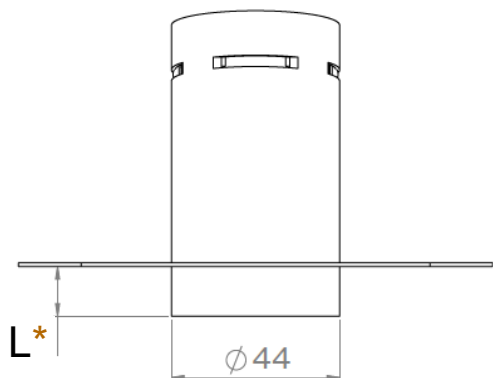


L^* : 1mm to 13mm to be specified when ordering
(other lengths upon request)



UNDO FIXED TRIMLESS 20° version

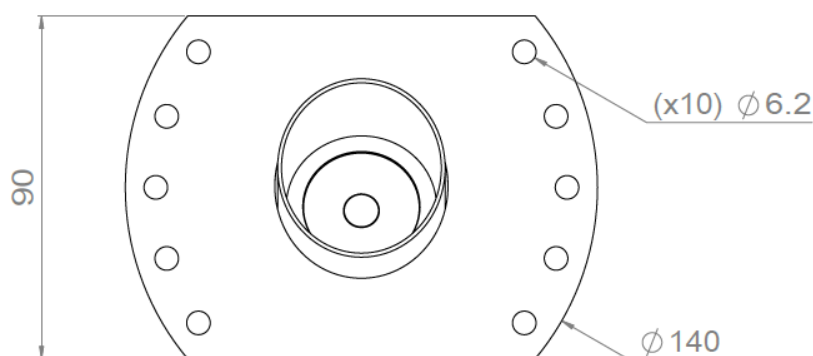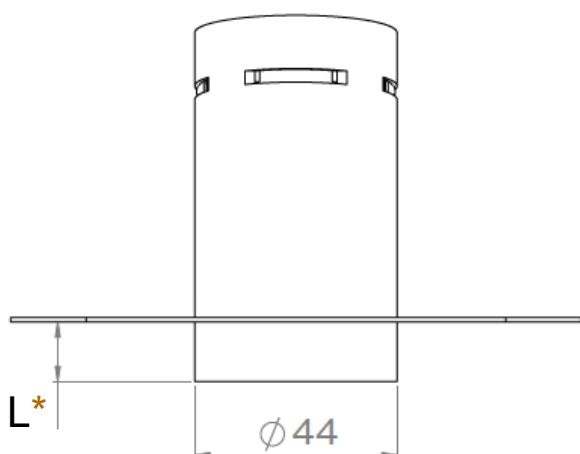

L^* : 1mm to 13mm to be specified when ordering
(other lengths upon request)




All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2025.08.01

Louss


6/8

Firalux & LOuss brands



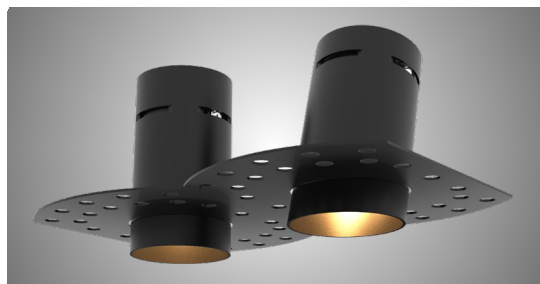


UNDO FIXED TRIMLESS

Double version (0°+ 15°)

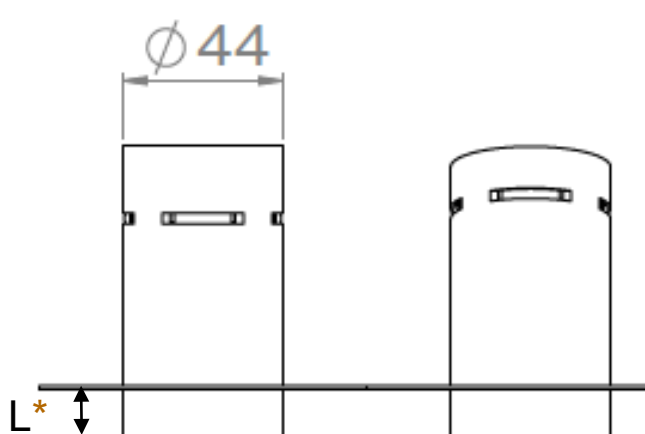

L* : 1mm to 13mm to be specified when ordering
(other lengths upon request)

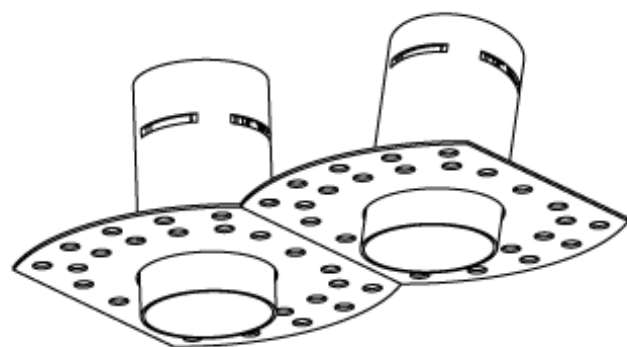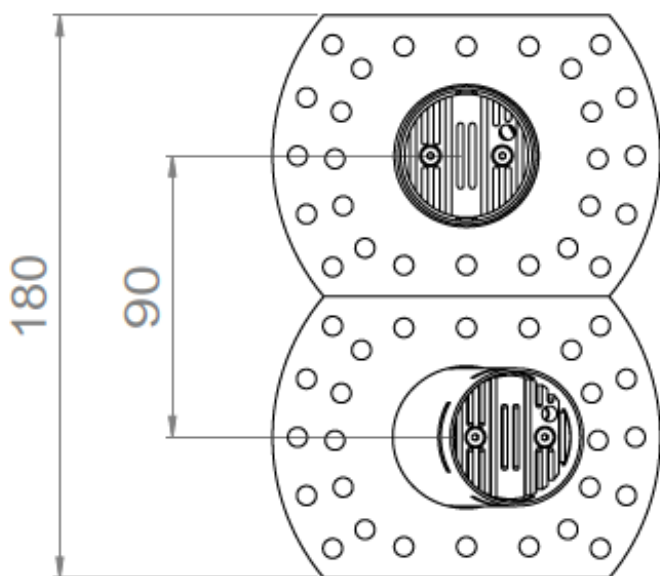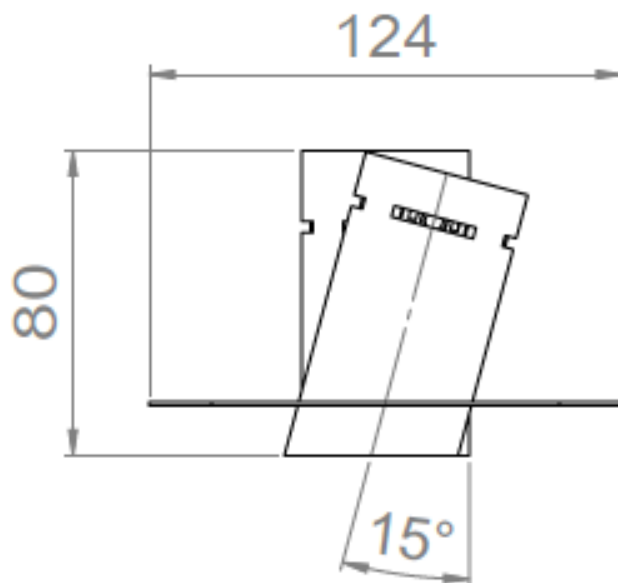

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOUSS

Last update : 2025.08.01

7/8

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




UNDO FIXED TRIMLESS Installation Guide


Installation from above




Install the recessed box from above and screw it into the surface




Cover the lateral plates of the recessed box by coating and painting




Insert the spotlight from below

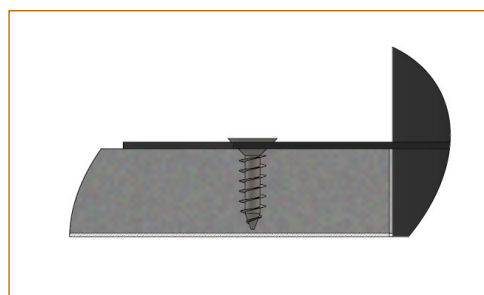


Installation from below




Install the recessed box from below and screw it into the surface



Cover the lateral plates of the recessed box by coating and painting



Insert the spotlight from below

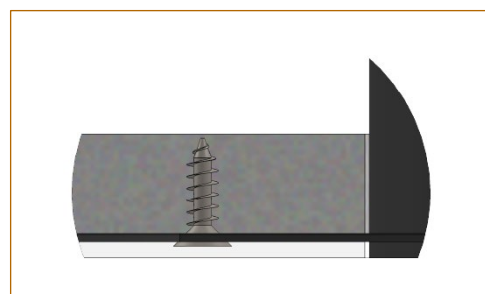

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2025.08.01

8/8

Firalux & LOuss brands

LOuss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE