


lOuss  
Lighting Emotion

# MYSTA RANGE



Best&lOuss

# Index



## Mysta Recessed - 3



Trimless



Trimless-S



Trim

## Mysta Plug - 9



Plug



Plug-B



Plug-S



Plug-SB

## Mysta On-Track - 15



48V-Stucchi



230V

# Wouss

Lighting Emotion



Trimless




Trimless-S



Trim

## MYSTA RECESSED

The mysterious luminaire





## MYSTA



## Trimless



## Trimless-S



## Trim

|                                                 |                                                                                                                                                                                                     |                                                                                        |       |            |
|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-------|------------|
| Range                                           | Adjustable low luminance recessed spotlight for general & accent lighting                                                                                                                           |                                                                                        |       |            |
| Description                                     | Rotation 360° - Adjustable tilt 30°                                                                                                                                                                 |                                                                                        |       |            |
|                                                 | Trimless • Trim                                                                                                                                                                                     | Trimless-S                                                                             |       |            |
|                                                 | Optional : Easily changeable LED, optics and accessories on site, without any tool, with integrated <b>Easy Swap</b> system (see page 4)                                                            | Without Easy Swap system                                                               |       |            |
| Finish                                          | White RAL 9003 matt finish - Black RAL 9005 matt finish<br>(other upon request)                                                                                                                     |                                                                                        |       |            |
| Dimensions                                      | Trimless                                                                                                                                                                                            | Trimless-S                                                                             |       |            |
|                                                 | Spotlight diameter : 42mm<br>Installation diameter : 74.5mm<br>Installation depth : 85mm                                                                                                            | Spotlight diameter : 35mm<br>Installation diameter : 60mm<br>Installation depth : 64mm |       |            |
|                                                 | Trim                                                                                                                                                                                                |                                                                                        |       |            |
|                                                 | Spotlight diameter : 42mm<br>External diameter : 90.5mm<br>Installation diameter : 74.5mm<br>Installation depth : 83.5mm                                                                            |                                                                                        |       |            |
|                                                 |                                                                                                                                                                                                     |                                                                                        |       |            |
| Net weight                                      | ± 0.150g according to version                                                                                                                                                                       |                                                                                        |       |            |
| LED characteristics                             | 2700K – 3000K – 3500K – 4000K – 5000K (other upon request)<br>MacAdam ellipse : 3 SDCM (standard version) – 2 SDCM (premium version)<br>CRI 90 (standard version) – CRI 95, R9>80 (premium version) |                                                                                        |       |            |
| Optical beams & Performances<br>Trimless • Trim | Beam                                                                                                                                                                                                | Candela                                                                                | Power | Photometry |
|                                                 | 11°                                                                                                                                                                                                 | 10,900 cd (3000K)                                                                      | 7W    | les 2591A  |
|                                                 | 16°                                                                                                                                                                                                 | 6,300 cd (3500K)                                                                       | 8W    | les 2645A  |
|                                                 | 20°                                                                                                                                                                                                 | 4,400 cd (3500K)                                                                       | 7W    | les 2510A  |
|                                                 | 23°                                                                                                                                                                                                 | 3,100cd (3500K)                                                                        | 7W    | les 2511A  |
|                                                 | 34°                                                                                                                                                                                                 | 1,700cd (3500K)                                                                        | 8W    | les 2617A  |
|                                                 | 43°                                                                                                                                                                                                 | 1,050 cd (3500K)                                                                       | 7W    | les 2513A  |
|                                                 | Other beams upon request<br>300 to 800 lumen<br>UGR < 15                                                                                                                                            |                                                                                        |       |            |

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.10.02

**lOuss**

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best&LOuss

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE



MYSTA

•


Trimless

•

Trimless-S

•

Trim

| Optical beams<br>& Performances<br>Trimless-S                                                         | Beam                                                                                                                                                                                                                                                                                                                                                                                                                                              | Candela          | Power | Photometry |
|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-------|------------|
|                                                                                                       | 12°                                                                                                                                                                                                                                                                                                                                                                                                                                               | 2,100 cd (3000K) | 3W    | les 698B   |
|                                                                                                       | 17°                                                                                                                                                                                                                                                                                                                                                                                                                                               | 2,356 cd (3000K) | 4W    | les 3177A  |
|                                                                                                       | 20°                                                                                                                                                                                                                                                                                                                                                                                                                                               | 803 cd (3000K)   | 3W    | les 701B   |
|                                                                                                       | 25°                                                                                                                                                                                                                                                                                                                                                                                                                                               | 748 cd (3000K)   | 4W    | les 3178A  |
|                                                                                                       | 28°                                                                                                                                                                                                                                                                                                                                                                                                                                               | 420 cd (3000K)   | 3W    | les 699B   |
|                                                                                                       | 30°                                                                                                                                                                                                                                                                                                                                                                                                                                               | 635 cd (3000K)   | 4W    | les 3179A  |
|                                                                                                       | Other beams upon request<br>3W LED (3000K) : 140 to 150lm<br>4W LED (3000K) : 172 to 263lm<br>UGR < 15                                                                                                                                                                                                                                                                                                                                            |                  |       |            |
| Accessories                                                                                           | Filters, honeycomb grid upon request                                                                                                                                                                                                                                                                                                                                                                                                              |                  |       |            |
| Connection                                                                                            | Supplied with 0.5m cable (more length upon request)                                                                                                                                                                                                                                                                                                                                                                                               |                  |       |            |
| Separate power supply                                                                                 | 700mA max. external constant current driver<br>Dimmable driver upon request<br>For the US & Canada use a UL class 2 driver                                                                                                                                                                                                                                                                                                                        |                  |       |            |
| Consommation                                                                                          | 4W to 9W max. according to version                                                                                                                                                                                                                                                                                                                                                                                                                |                  |       |            |
| Use limitations<br> | The product must be installed into a ventilated area<br>This product must not be covered by insulating material<br>Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees<br>The drivers, if not delivered by LOuss, must be approved before use                                                                         |                  |       |            |
| Warranty                                                                                              | Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature.<br>3-year parts and labor warranty<br>The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product<br>All products are electrically tested and received a functional burn-in |                  |       |            |

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged  
Creation : 2025.04.08 / Last update : 2026.10.02



MYSTA



Trimless



Trimless-S



Trim

## Easy Swap System



All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.10.02

LOUSS


BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best&LOUSS


Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE




## MYSTA Trimless

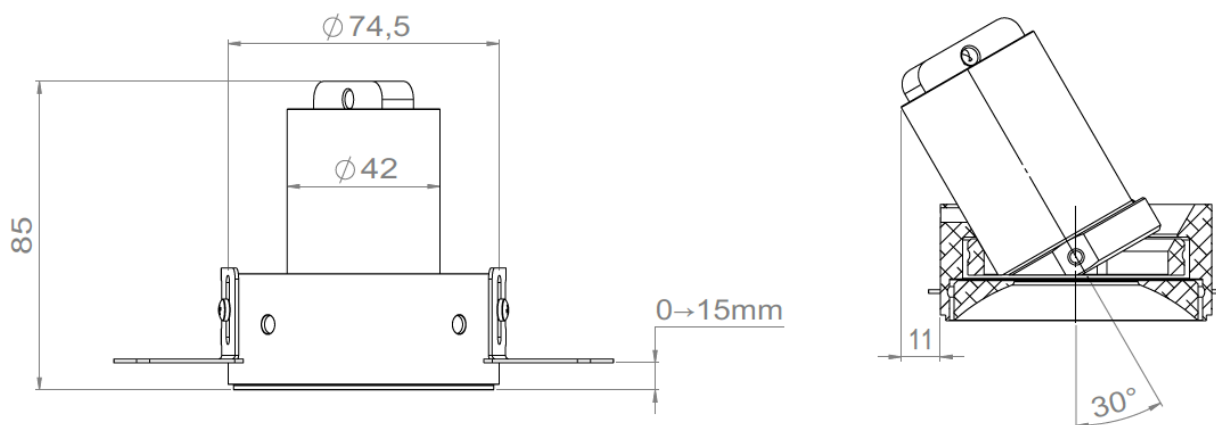

## MYSTA Trimless-S

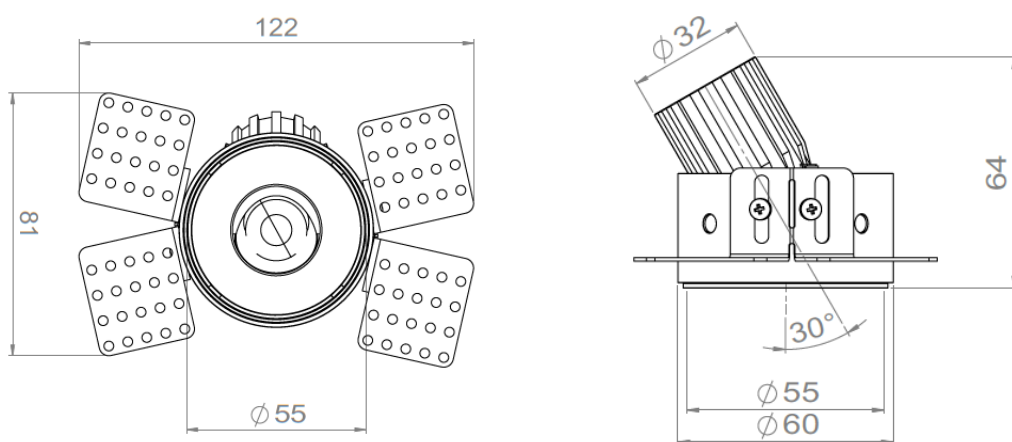

## MYSTA Trim

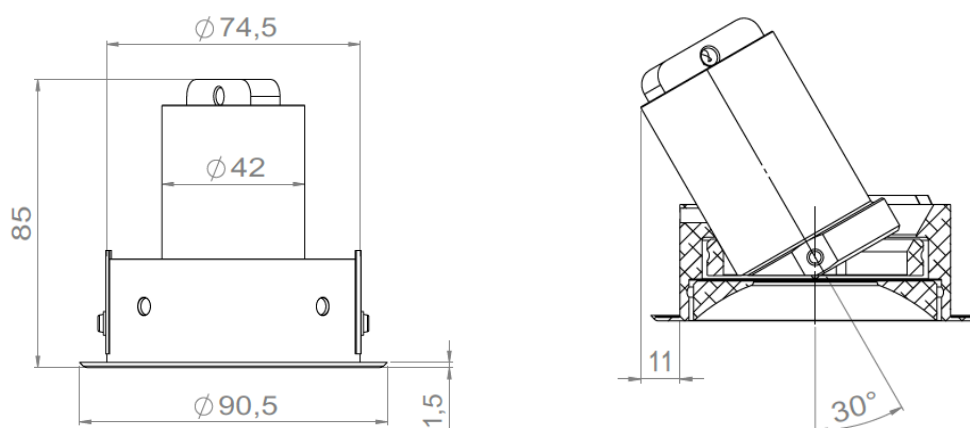

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.10.02

**lOUSS**

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best&LOuss


Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE




## MYSTA Trimless • Trimless-S

### Installation guide


#### Installation from above




Install the recessed box from above and screw it into the surface

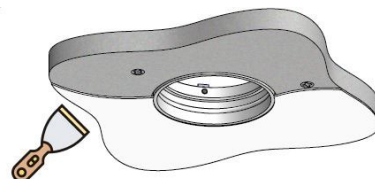


Cover the lateral plates of the recessed box by coating and painting




Insert the spotlight from below

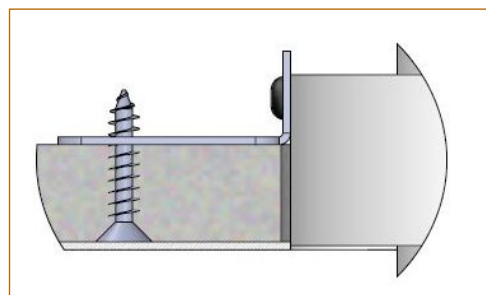


#### Installation from below




Install the recessed box from below and screw it into the surface

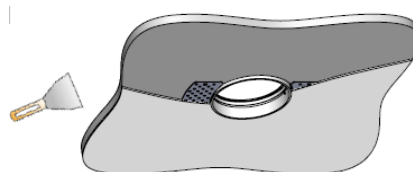

Cover the lateral plates of the recessed box by coating and painting



Insert the spotlight from below

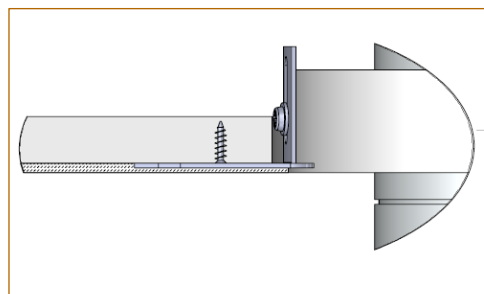

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.10.02

**lOuss**

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best&LOuss

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE

# Wouss

Lighting Emotion



Mysta Plug



Mysta Plug B



Mysta Small Plug



Mysta Small Plug B

## MYSTA PLUG



## Mysta Plug • Mysta Plug-B • Mysta Plug-S • Mysta Plug-SB

|                            |                                                                                                                                                                                                     |                                                                                                                                                                                   |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Range</b>               | Adjustable low luminance recessed spotlight for general & accent lighting                                                                                                                           |                                                                                                                                                                                   |
| <b>Description</b>         | Rotation 360° - Adjustable tilt 90°                                                                                                                                                                 |                                                                                                                                                                                   |
|                            | <b>Plug</b>                                                                                                                                                                                         | <b>Plug-B</b>                                                                                                                                                                     |
|                            | Optional : Easily changeable LED, optics and accessories on site, without any tool, with integrated <b>Easy Swap</b> system (see page 4)                                                            | To be installed in a concrete surface<br>Optional : Easily changeable LED, optics and accessories on site, without any tool, with integrated <b>Easy Swap</b> system (see page 4) |
|                            | <b>Plug-S</b>                                                                                                                                                                                       | <b>Plug-SB</b>                                                                                                                                                                    |
|                            | Without Easy Swap system                                                                                                                                                                            | To be installed in a concrete surface<br>Without Easy Swap system                                                                                                                 |
| <b>Finish</b>              | White RAL 9003 matt finish<br>Black RAL 9005 matt finish<br>(other upon request)                                                                                                                    |                                                                                                                                                                                   |
| <b>Dimensions</b>          | <b>Plug</b>                                                                                                                                                                                         | <b>Plug-B</b>                                                                                                                                                                     |
|                            | Spotlight diameter : 46.0mm<br>Spotlight length : 64.0mm<br>Installation diameter : 24.0mm<br>Installation depth : 29.5mm                                                                           | Spotlight diameter : 46.0mm<br>Spotlight length : 64.0mm<br>Installation diameter : 31.0mm<br>Installation depth : 39.0mm                                                         |
|                            | <b>Plug-S</b>                                                                                                                                                                                       | <b>Plug-SB</b>                                                                                                                                                                    |
|                            | Spotlight diameter : 35.0mm<br>Spotlight length : 49.5mm<br>Installation diameter : 24.0mm<br>Installation depth : 29.5mm                                                                           | Spotlight diameter : 35.0mm<br>Spotlight length : 49.5mm<br>Installation diameter : 31.0mm<br>Installation depth : 39.0mm                                                         |
| <b>Net weight</b>          | ± 0.150g according to version                                                                                                                                                                       |                                                                                                                                                                                   |
| <b>LED characteristics</b> | 2700K – 3000K – 3500K – 4000K – 5000K (other upon request)<br>MacAdam ellipse : 3 SDCM (standard version) – 2 SDCM (premium version)<br>CRI 90 (standard version) – CRI 95, R9>80 (premium version) |                                                                                                                                                                                   |
| <b>Accessories</b>         | Filters, honeycomb grid upon request                                                                                                                                                                |                                                                                                                                                                                   |

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.04.08



## Mysta Plug • Mysta Plug-B • Mysta Plug-S • Mysta Plug-SB

|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                   |                                    |            |
|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------------------------|------------|
| Optical beams & Performances<br>Plug & Plug-B    | Beam                                                                                                                                                                                                                                                                                                                                                                                                                                              | Candela           | Power                              | Photometry |
|                                                  | 11°                                                                                                                                                                                                                                                                                                                                                                                                                                               | 10,900 cd (3000K) | 7W                                 | les 2591A  |
|                                                  | 16°                                                                                                                                                                                                                                                                                                                                                                                                                                               | 6,300 cd (3500K)  | 8W                                 | les 2645A  |
|                                                  | 20°                                                                                                                                                                                                                                                                                                                                                                                                                                               | 4,400 cd (3500K)  | 7W                                 | les 2510A  |
|                                                  | 23°                                                                                                                                                                                                                                                                                                                                                                                                                                               | 3,100cd (3500K)   | 7W                                 | les 2511A  |
|                                                  | 34°                                                                                                                                                                                                                                                                                                                                                                                                                                               | 1,700cd (3500K)   | 8W                                 | les 2617A  |
|                                                  | 43°                                                                                                                                                                                                                                                                                                                                                                                                                                               | 1,050 cd (3500K)  | 7W                                 | les 2513A  |
|                                                  | Other beams upon request<br>300 to 800 lumen<br>UGR < 15                                                                                                                                                                                                                                                                                                                                                                                          |                   |                                    |            |
| Optical beams & Performances<br>Plug-S & Plug-SB | 15° - 25° - 35°<br>150 to 400 lumen<br>UGR < 15                                                                                                                                                                                                                                                                                                                                                                                                   |                   |                                    |            |
| Connection                                       | Supplied with 0.5m cable (more length upon request)                                                                                                                                                                                                                                                                                                                                                                                               |                   |                                    |            |
| Separate power supply                            | 700mA max. external constant current driver<br>Dimmable driver upon request<br>For the US & Canada use a UL class 2 driver                                                                                                                                                                                                                                                                                                                        |                   |                                    |            |
| Consommation                                     | Plug • Plug-B                                                                                                                                                                                                                                                                                                                                                                                                                                     |                   | Plug-S • Plug-SB                   |            |
|                                                  | 4W à 9W max. according to version                                                                                                                                                                                                                                                                                                                                                                                                                 |                   | 3W ou 4W max. according to version |            |
| Use limitations                                  | The product must be installed into a ventilated area<br>Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees<br>The drivers, if not delivered by LOuss, must be approved before use                                                                                                                                    |                   |                                    |            |
| Warranty                                         | Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature.<br>3-year parts and labor warranty<br>The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product<br>All products are electrically tested and received a functional burn-in |                   |                                    |            |

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.04.08

LOuss

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOuss

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE



## MYSTA • Plug • Plug-B

### Easy Swap System



All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.04.08

LOUSS



BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS


Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE



## MYSTA Plug • Plug-B Dimensions

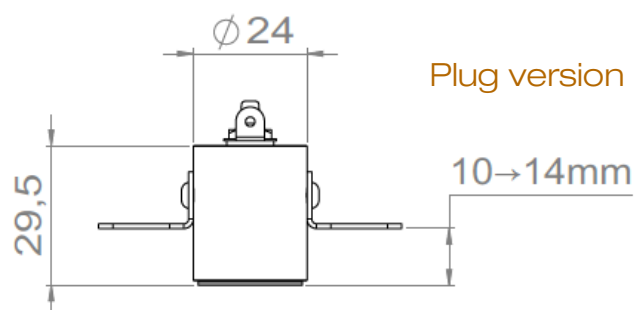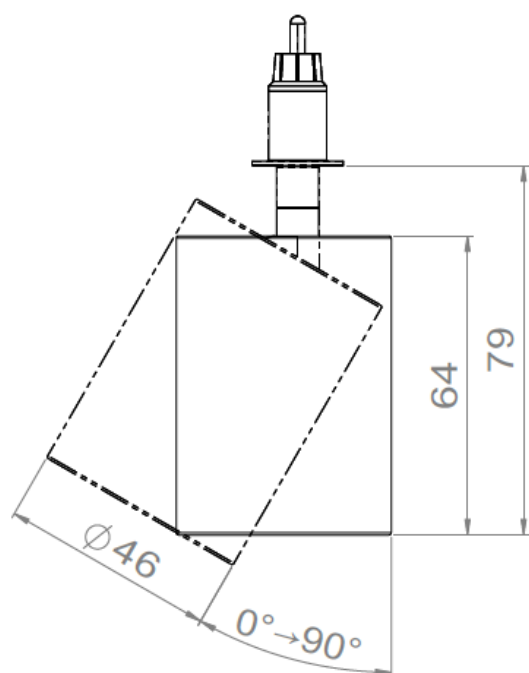

Plug version




Plug-B version  
(installation in a  
concrete ceiling)

## After installation

Plug version



Plug-B version

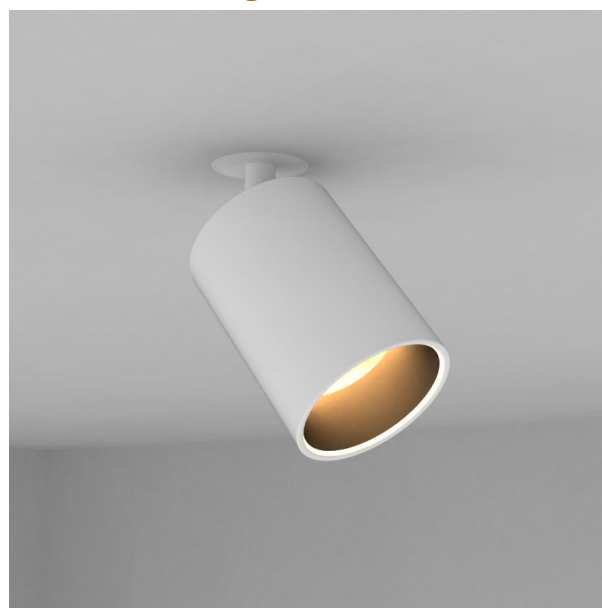

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.04.08

**LOUSS**

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z



Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE




## MYSTA Plug-S • Plug-SB

### Dimensions

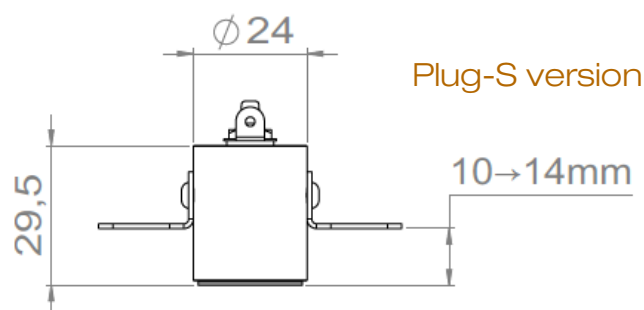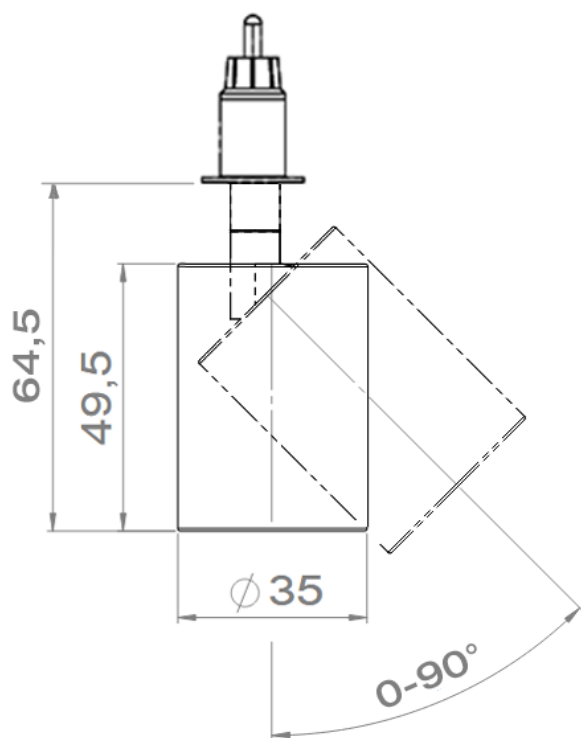

Plug-S version



Plug-SB version  
(installation in a  
concrete ceiling)

### After installation

Plug-S version



Plug-SB version



All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.04.08

**LOUSS**

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE

# Wouss


Lighting Emotion



48V-Stucchi



230V



## MYSTA ON TRACK



230V

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

2/5



MYSTA ON TRACK

•

48V-Stucchi


•

230V

| Performances    | 300 to 800 lumen<br>UGR < 15                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                           |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Accessories     | Filters, honeycomb grid upon request                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                           |
| Power           | 4W to 10W according to version                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                           |
| Power supply    | 48V-Stucchi                                                                                                                                                                                                                                                                                                                                                                                                                                       | 230V                                                                                                                                                      |
|                 | Spot adaptator for 48V Stucchi EVO-S track<br>Separate power supply 230V/48V<br>ON/OFF, PWM or DALI driver                                                                                                                                                                                                                                                                                                                                        | Driver suitable for Global Trac Pro XTS track or equivalent (Erco, Trajectoire...)<br>700mA or 1,050mA max. ON/OFF driver<br>or<br>700mA max. DALI driver |
| Use limitations | The product must be installed into a ventilated area<br>Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees<br>The drivers, if not delivered by LOuss, must be approved before use                                                                                                                                    |                                                                                                                                                           |
| Warranty        | Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature.<br>3-year parts and labor warranty<br>The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product<br>All products are electrically tested and received a functional burn-in |                                                                                                                                                           |

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.04.08

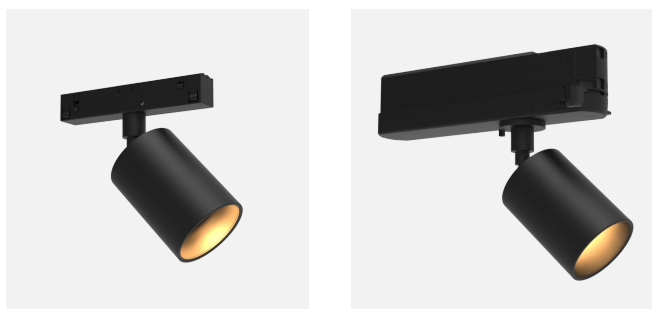

## MYSTA ON TRACK • 48V-Stucchi • 230V

### Easy swap system



All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.04.08

LOUSS


BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS


Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE



## MYSTA ON TRACK 48V-S

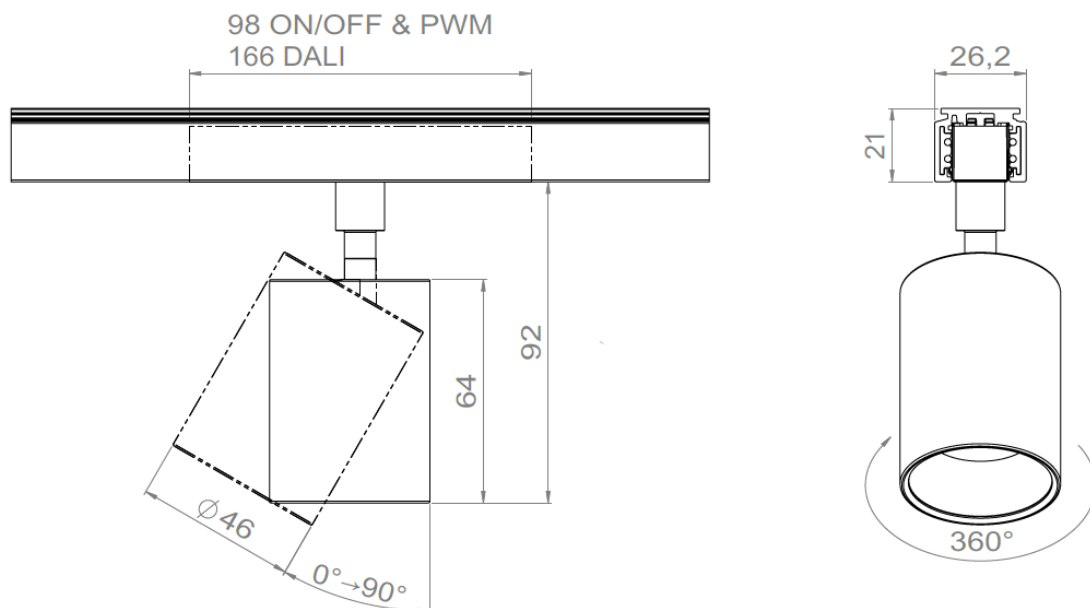

## MYSTA ON TRACK 230V

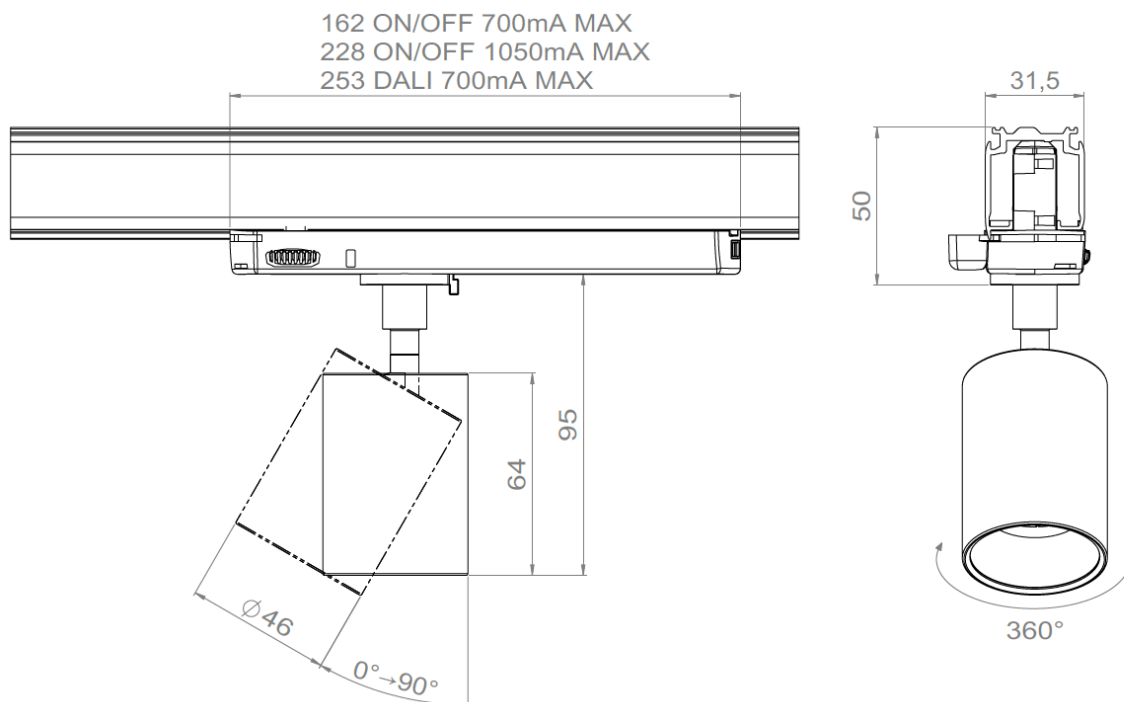

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.04.08

**lOuss**

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOuss

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE