



Trimless




Trimless-S



Trim

MYSTA RECESSED

The mysterious luminaire





MYSTA

•

Trimless

•

Trimless-S

•

Trim

Range	Adjustable low luminance recessed spotlight for general & accent lighting			
Description	Rotation 360° - Adjustable tilt 30°			
	Trimless • Trim		Trimless-S	
	Optional : Easily changeable LED, optics and accessories on site, without any tool, with integrated Easy Swap system (see page 4)		Without Easy Swap system	
Finish	White RAL 9003 matt finish - Black RAL 9005 matt finish (other upon request)			
Dimensions	Trimless		Trimless-S	
	Spotlight diameter : 42mm Installation diameter : 74.5mm Installation depth : 85mm		Spotlight diameter : 35mm Installation diameter : 60mm Installation depth : 64mm	
	Trim			
	Spotlight diameter : 42mm External diameter : 90.5mm Installation diameter : 74.5mm Installation depth : 83.5mm			
Net weight	± 0.150g according to version			
LED characteristics	2700K – 3000K – 3500K – 4000K – 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard version) – 2 SDCM (premium version) CRI 90 (standard version) – CRI 95, R9>80 (premium version)			
Optical beams & Performances Trimless • Trim	Beam	Candela	Power	Photometry
	11°	10,900 cd (3000K)	7W	les 2591A
	16°	6,300 cd (3500K)	8W	les 2645A
	20°	4,400 cd (3500K)	7W	les 2510A
	23°	3,100cd (3500K)	7W	les 2511A
	34°	1,700cd (3500K)	8W	les 2617A
	43°	1,050 cd (3500K)	7W	les 2513A
	Other beams upon request 300 to 800 lumen UGR < 15			

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged
Creation : 2025.04.08 / Last update : 2026.10.02



MYSTA

•


Trimless

•

Trimless-S

•

Trim

Optical beams & Performances Trimless-S	Beam	Candela	Power	Photometry
	12°	2,100 cd (3000K)	3W	les 698B
	17°	2,356 cd (3000K)	4W	les 3177A
	20°	803 cd (3000K)	3W	les 701B
	25°	748 cd (3000K)	4W	les 3178A
	28°	420 cd (3000K)	3W	les 699B
	30°	635 cd (3000K)	4W	les 3179A
	Other beams upon request 3W LED (3000K) : 140 to 150lm 4W LED (3000K) : 172 to 263lm UGR < 15			
Accessories	Filters, honeycomb grid upon request			
Connection	Supplied with 0.5m cable (more length upon request)			
Separate power supply	700mA max. external constant current driver Dimmable driver upon request For the US & Canada use a UL class 2 driver			
Consommation	4W to 9W max. according to version			
Use limitations 	The product must be installed into a ventilated area This product must not be covered by insulating material Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use			
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in			

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged
Creation : 2025.04.08 / Last update : 2026.10.02



MYSTA



Trimless



Trimless-S



Trim

Easy Swap System



LED / COB

Optics

Accessories (filters, honeycomb grid)

Spotlight's body

Finishing ring

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.10.02

LOUSS


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOUSS


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




MYSTA Trimless

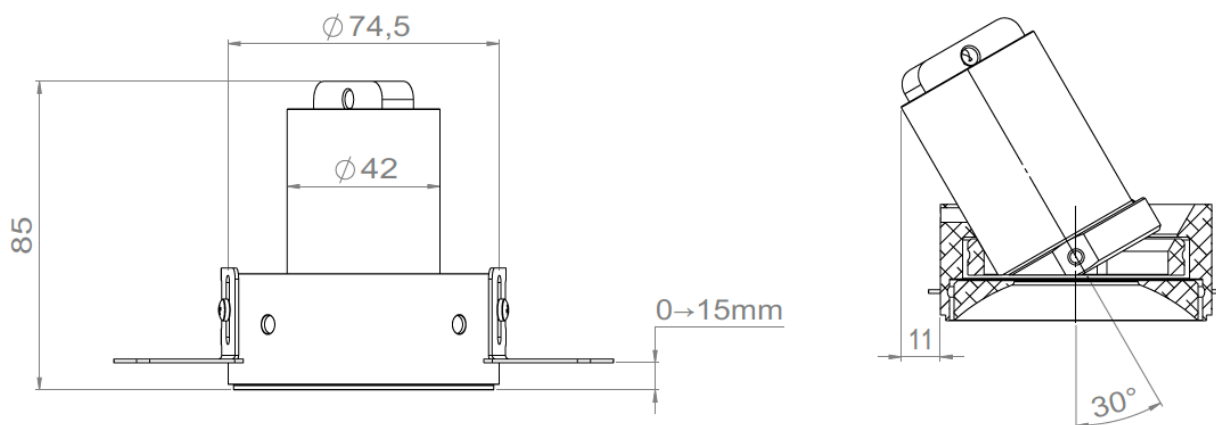

MYSTA Trimless-S

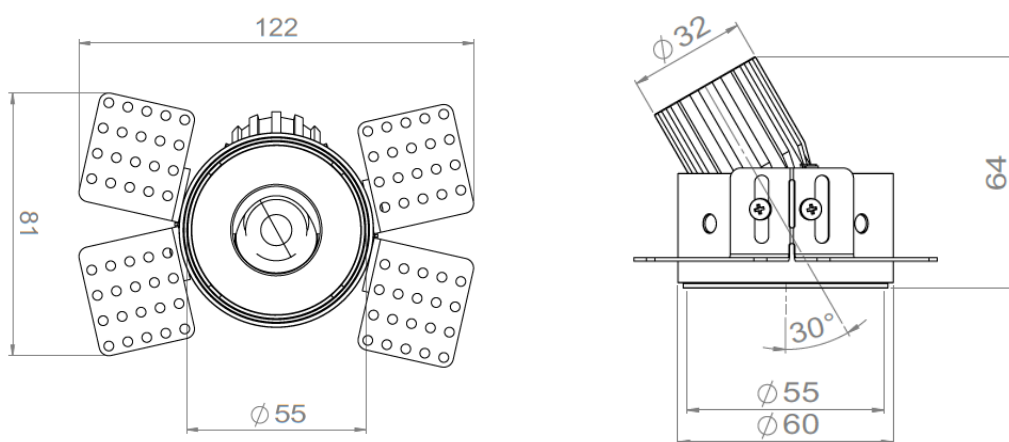

MYSTA Trim

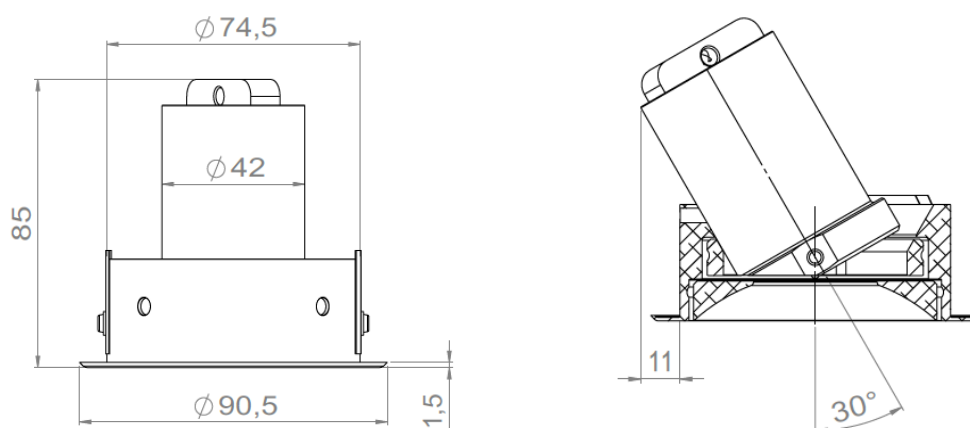

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.10.02

louss

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




MYSTA Trimless • Trimless-S

Installation guide


Installation from above




Install the recessed box from above and screw it into the surface

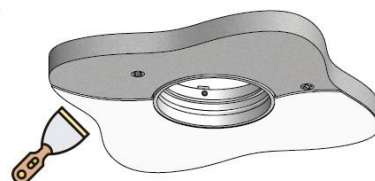


Cover the lateral plates of the recessed box by coating and painting




Insert the spotlight from below

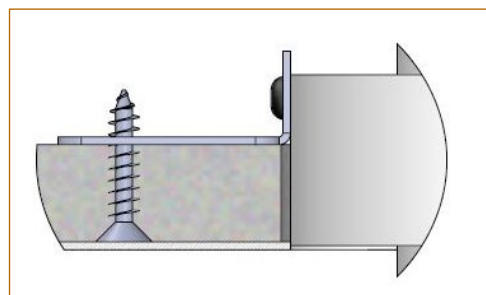


Installation from below




Install the recessed box from below and screw it into the surface

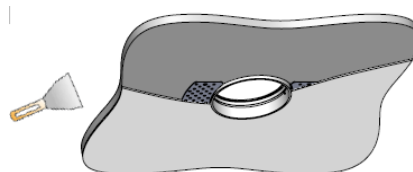

Cover the lateral plates of the recessed box by coating and painting



Insert the spotlight from below

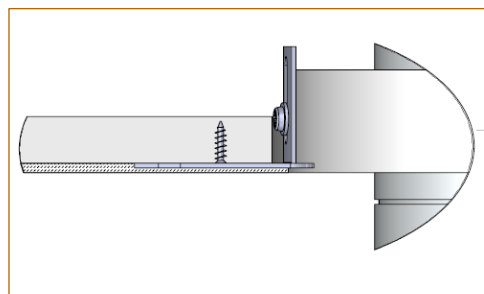

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.10.02

lOuss

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE