

BRIKE RANGE






















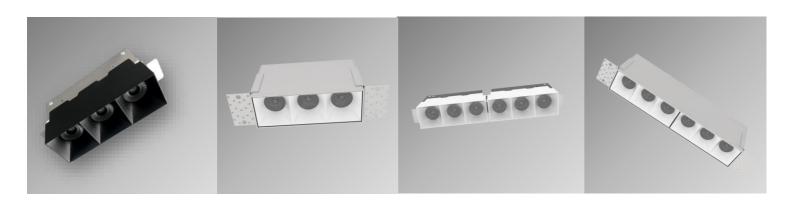

BRIKE

Common characteristics


Range	Low luminance luminaire for general and accent lighting
Description	Aluminium heatsink & body RAL upon request
LED characteristics	2700K - 3000K - 3500K - 4000K (other upon request) CRI90 - CRI > 95 upon request UGR < 19
Optical beam	10°- 25°- 40°- 60°- specific filters upon request
Connection	Supplied with safety rope and 1m standard cable (other upon request)
Separate power supply	350 to 900mA constant current driver Dimmable driver upon request
LED power	7W to 18W
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.


All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

Wuss

Last update: 25/10/2021 Firalux & LOuss brands







BRIKE 3 LED

Brackets version

Dimensions	Length: 166mm with brackets Width: 46mm
	Height: 86mm
Net weight	0.370 kg (except driver)
Installation	Recessed dimensions: 136mm x 47mm (An open space of 100mm has to be planned above the ceiling)


All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.



Firalux & LOuss brands

3/6

Last update: 04/11/2021

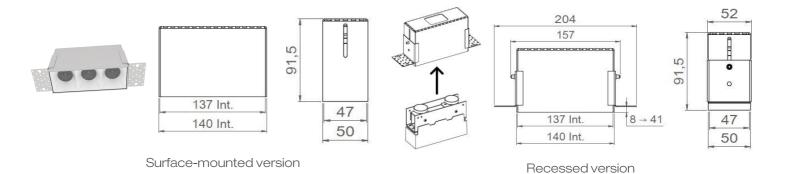

BRIKE 3 LED

Magnetic version

	Length: 157mm
Dimensions	Width: 50mm
	Height: 91.5mm
Net weight	0.670 kg (except driver)
Installation	Recessed dimensions : 142mm x 49mm
	(An open space of 100mm has to be planned above the ceiling)

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.


Wuss


Last update : 04/11/2021

Firalux & LOuss brands

SARL, Capital 40 000€ RCS DIJON B 503 367 245 TVA/VAT n°: FR24 503 367 245 APE 4676Z Tel.: +33 380 48 65 68 contact@louss.fr www.louss.fr Best group Siège social / Head Office PA Les Terres d'Or Route de Saint Philibert 21220 Gevrey Chambertin - FRANCE

4/6

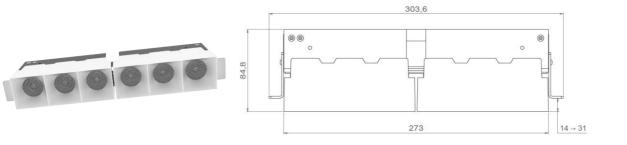



BRIKE 6 LED

Brackets version


Dimensions	Length: 306mm with brackets Width: 46mm Height: 86mm
Net weight	0.850 kg (except driver)
Installation	Recessed dimensions: 275mm x 47mm (An open space of 100mm has to be planned above the ceiling)

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.



5/6

Last update: 04/11/2021

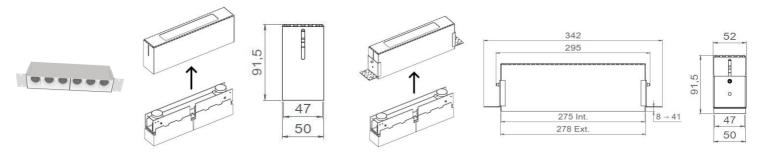

Surface-mounted version

Recessed version

BRIKE 6 LED

Magnetic version

Dimensions	Length: 295mm
	Width: 47mm
	Height: 91.50mm
Net weight	1.40 kg (except driver)
Installation	Recessed dimensions : 280mm x 49mm
	(An open space of 100mm has to be planned above the ceiling)
	(An open space of 100mm has to be planned above the ceiling)

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.



Firalux & LOuss brands

6/6

Last update: 04/11/2021