


LOUSS


Lighting Emotion



LINGO

The svelte and elegant luminaire



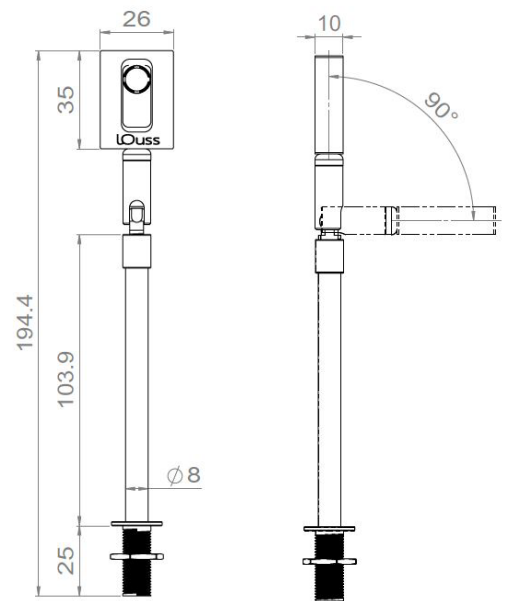

LINGO

Range	Accent decorative lighting
Description	Sober and elegant adjustable LED luminaire on a rod, dedicated to precision lighting and highlighting of showcases
Finish	Mirror or gold metal finish
Dimensions	Adjustable head : 35mm x 26mm Rod length : 100mm, 200mm or 333mm Rod diameter : 8mm
Net weight	0.125 kg
LED characteristics	1 LED : 2700K – 3000K – 4000K (other upon request)
Optical beam	15° - 25° - 40° - 80° (other upon request)
Connection	Supplied with 0.5m cable (more length upon request) Individual or connection in series on external constant current driver
Separate power supply	External constant current driver 500mA max. For the US & Canada, use a UL class 2 driver
LED power	350mA – 1.2W 500mA – 1.8W
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOuss

Creation : 2018.09.20 / Last update : 2025.07.08

2/2

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE