


LOUSS



Lighting Emotion



LINGO

The svelte and elegant luminaire



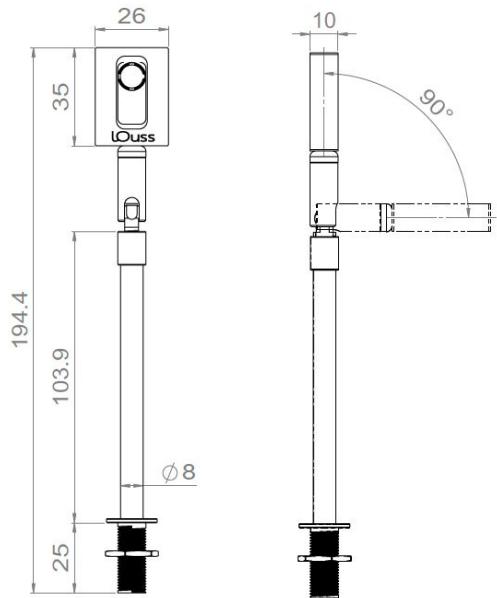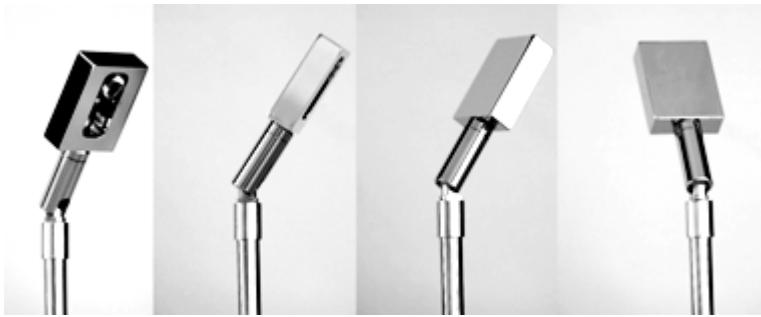

LINGO

Range	Accent decorative lighting
Description	Sober and elegant adjustable LED luminaire on a rod, dedicated to precision lighting and highlighting of showcases
Finish	Mirror or gold metal finish
Dimensions	<p>Adjustable head : 35mm x 26mm</p> <p>Rod length : 100mm, 200mm or 333mm</p> <p>Rod diameter : 8mm</p>
Net weight	0.125 kg
LED characteristics	1 LED : 2700K – 3000K – 4000K (other upon request)
Optical beam	15° - 25° - 40° - 80° (other upon request)
Connection	<p>Supplied with 0.5m cable (more length upon request)</p> <p>Individual or connection in series on external constant current driver</p>
Separate power supply	<p>External constant current driver 500mA max.</p> <p>For the US & Canada, use a UL class 2 driver</p>
LED power	<p>350mA – 1.2W</p> <p>500mA – 1.8W</p>
Use limitations	<p>The product must be installed into a ventilated area</p> <p>Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees</p> <p>The drivers, if not delivered by LOuss, must be approved before use</p>
Warranty	<p>Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature.</p> <p>3-year parts and labour warranty</p> <p>The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product</p> <p>All products are electrically tested and received a functional burn-in</p>

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.