


Wouss

Lighting Emotion



C60 TRIM • C75 TRIM

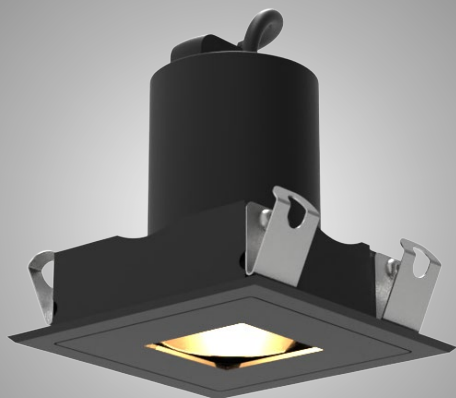


C60 TRIMLESS • C75 TRIMLESS



D70 TRIM • D85 TRIM




D70 TRIMLESS • D85 TRIMLESS



LEVANA

The secret downlight

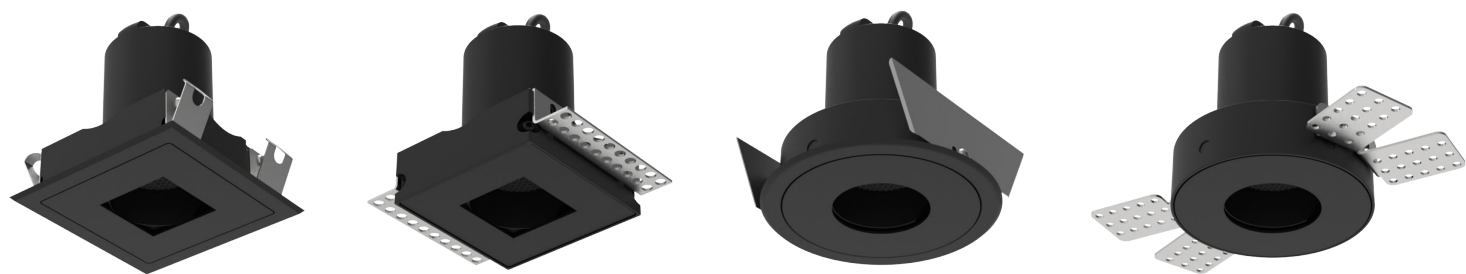

LEVANA • C60 & C75 Trim • C60 & C75 Trimless • D70 & D85 Trim • D70 & D85 Trimless

Range	Square (C reference) or round (D reference) adjustable recessed downlight for general & accent lighting							
Description	Aluminum mechanic parts – Trimless versions : stainless steel brackets Rotation 355° - Adjustable tilt 30° Low luminance Easily changeable LED, optics and accessories on site, without any tool, with integrated LOuss Permuto easy swap system (see page 8)							
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)							
Dimensions & Net weight	LEVANA C60				LEVANA C75			
	TRIM		TRIMLESS		TRIM		TRIMLESS	
	76 x 76 x 74.8mm 0.250 Kg		93 x 63 x 74.8mm With fixing brackets 0.260 Kg		91 x 91 x 90mm 0.400 Kg		108 x 78 x 90mm With fixing brackets 0.410 Kg	
	LEVANA D70				LEVANA D85			
	TRIM		TRIMLESS		TRIM		TRIMLESS	
	86mm x 74.8mm 0.300 Kg		136 x 73mm With fixing brackets 0.310 Kg		101 x 90mm 0.450 Kg		150 x 88mm With fixing brackets 0.460 Kg	
LED characteristics	2700K - 3000K – 3500K – 4000K MacAdam ellipse : 3 SDCM (standard version) – 2 SDCM (premium version) CRI>90 R9>50 - CRI95 R9>90 - CRI > 95 - R1 to R15 > 90							
Optical beam & Performance	LEVANA C60 / LEVANA D70				LEVANA C75 / LEVANA D85			
	Beam	Candela	Power	Photometry	Beam	Candela	Power	Photometry
	11°	10,900cd (3000K)	7W	ies 2591A	7.5°	27,500cd (3000K)	7W	ies 2629A
	16°	6,300 cd (3500K)	8W	ies 2645A	10°	19,000cd (3000K)	12W	ies 2336A
	20°	4,400 cd (3500K)	7W	ies 2510A	13°	15,000 cd (3500K)	12W	ies 2562A
	23°	3,100 cd (3500K)	7W	ies 2511A	17°	7,200 cd (3500K)	9W	ies 2568A
	34°	1,700 cd (3500K)	8W	ies 2617B	24°	3,900 cd (3500K)	12W	ies 2558A
	43°	1,050 cd (3500K)	7W	ies 2513A	34°	2,300 cd (3500K)	12W	ies 2545A
	UGR < 15							
Accessories	Filter, honeycomb grid upon request							

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update: 2025.04.08

2/8


LOuss

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

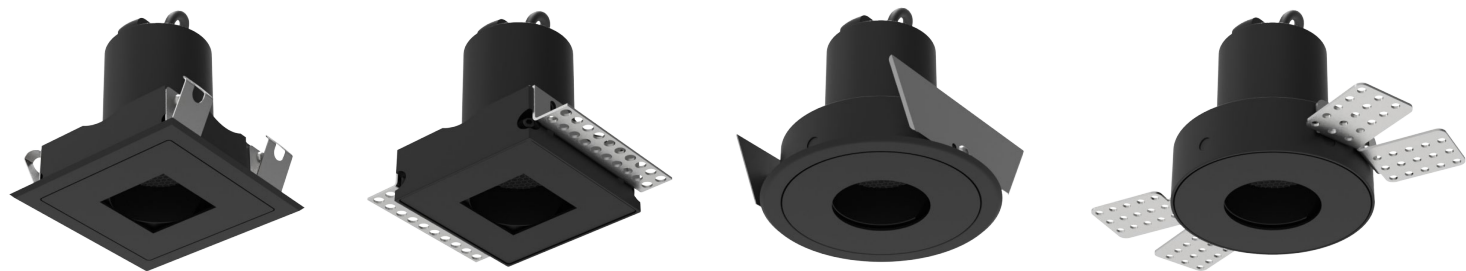

LEVANA • C60 & C75 Trim • C60 & C75 Trimless • D70 & D85 Trim • D70 & D85 Trimless

Power	LEVANA C60 / LEVANA D70		LEVANA C75 / LEVANA D85	
	TRIM	TRIMLESS	TRIM	TRIMLESS
	< 8W	< 8W	< 13W	< 13W
Power supply	Remote constant current driver according to version Optional: DALI remote driver For USA & Canada use UL class 2 power supply			
Installation	No specific tool required for the installation of the spotlight			
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use			
Warranty	Life span: L80-B10 = 35,000 hours (80% remaining flux) at 30°C ambient temperature The warranty applies to components and fabrication supplied by LOuss The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and receive a functional burn-in			

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update: 2025.04.08

Firalux & LOuss brands

LOuss




SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group



Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



LEVANA C60 TRIM

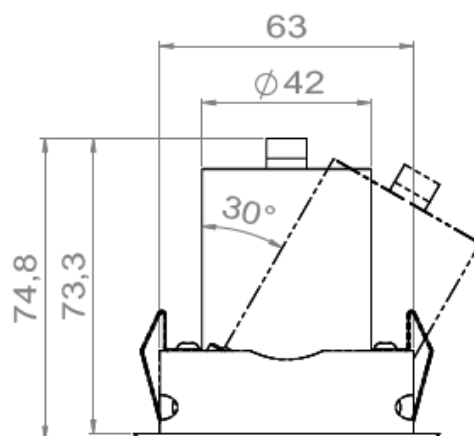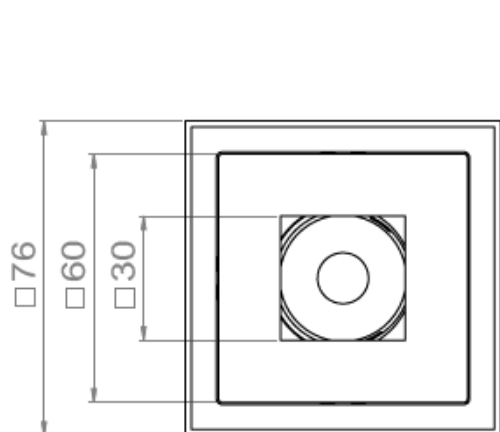

LEVANA C60 TRIMLESS

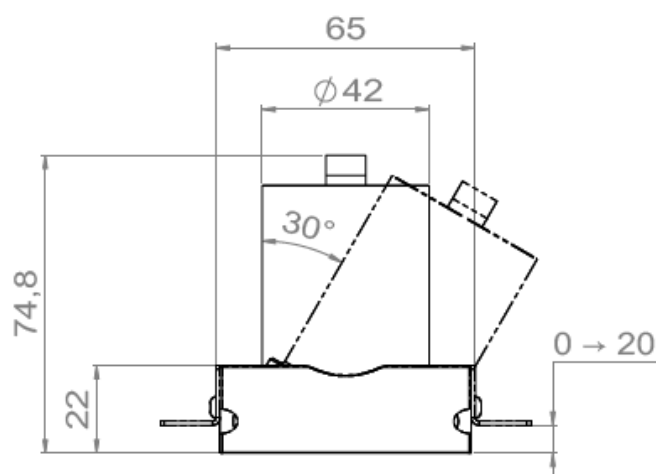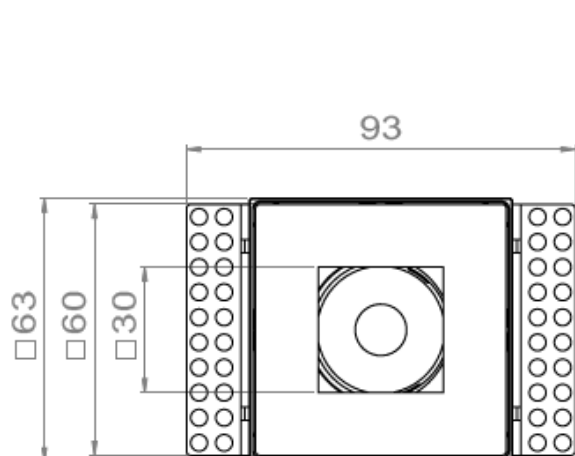

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Louss

Last update: 2025.04.08

Firalux & LOuss brands




SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group



Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



LEVANA C75 TRIM

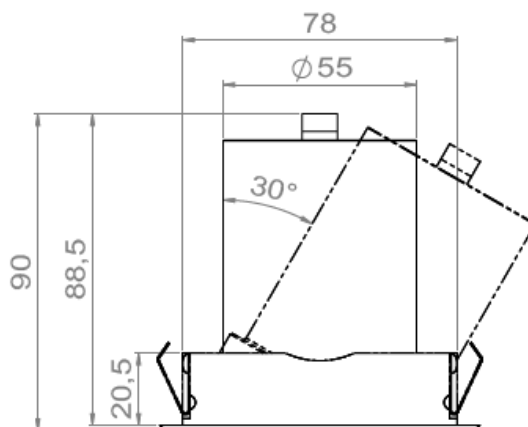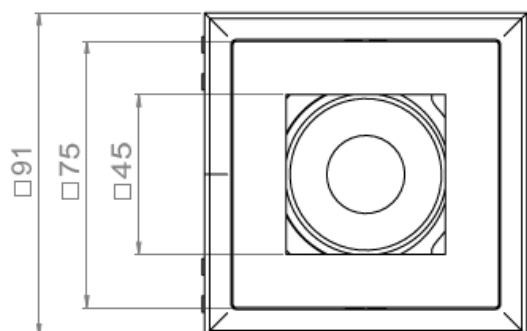

LEVANA C75 TRIMLESS

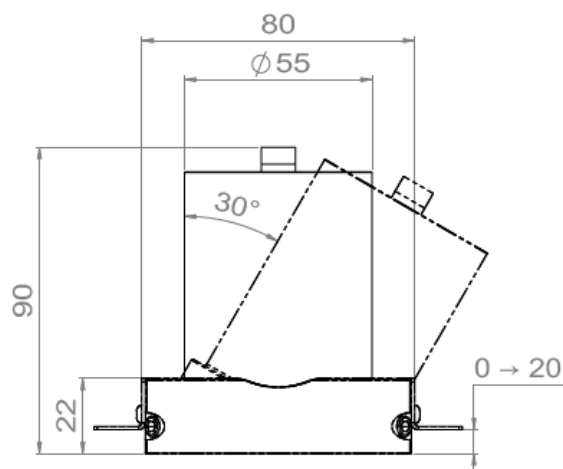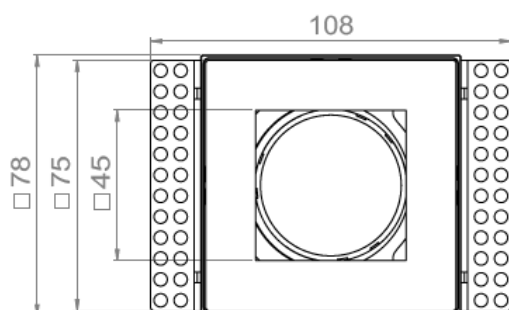

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

lOuss

Last update: 2025.04.08

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



LEVANA D70 TRIM

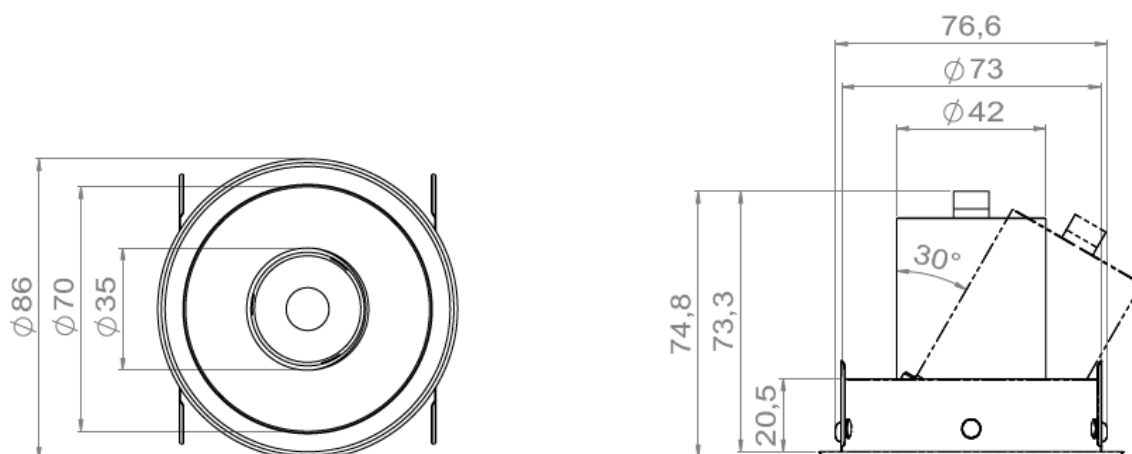

LEVANA D70 TRIMLESS

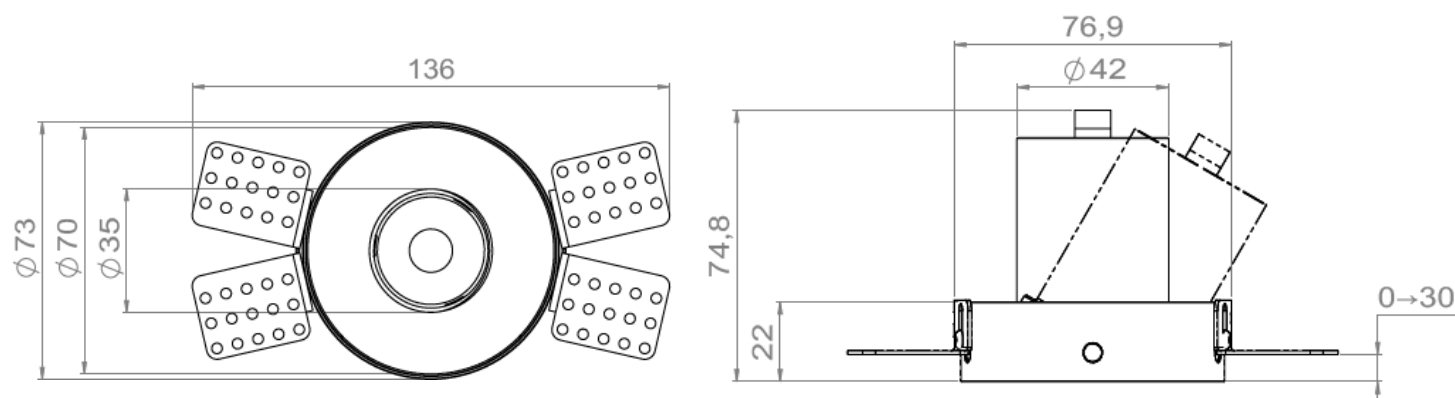

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS



Last update: 2025.04.08

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

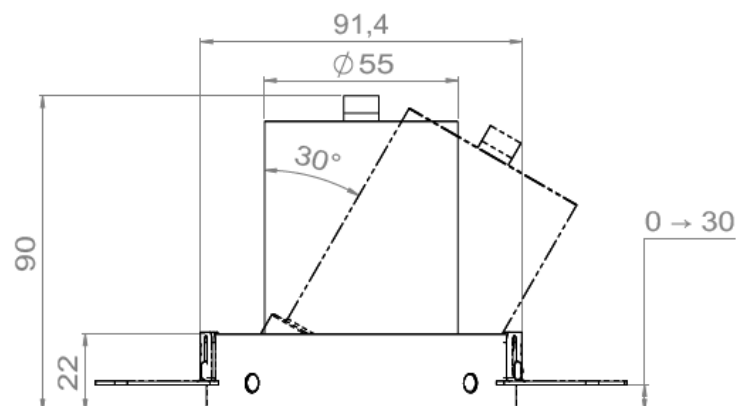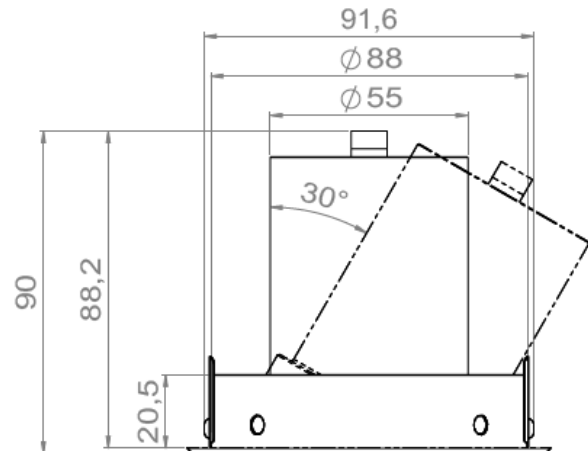


7/8

Last update: 2025.04.08

Firalux & LOuss brands


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

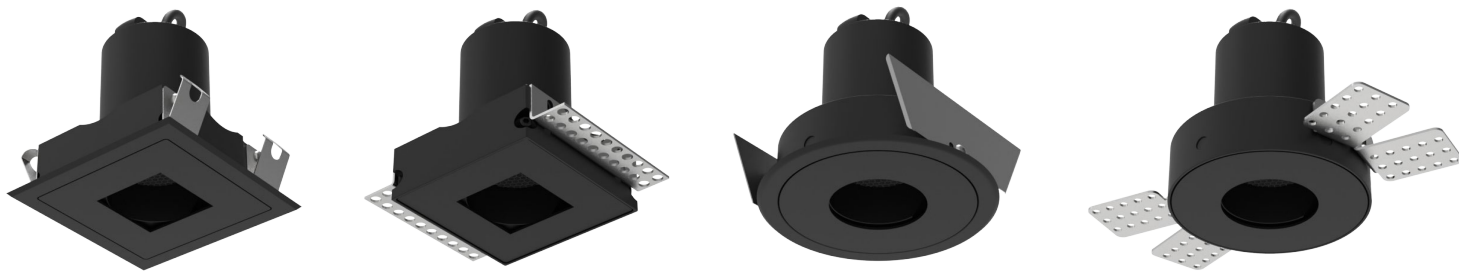

LEVANA • C60 & C75 Trim • C60 & C75 Trimless • D70 & D85 Trim • D70 & D85 Trimless

LOUSS **Permuto** - Easy Swap system

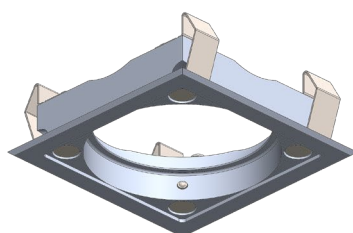


Square or round recessed frame
according to version




LED / COB



Optics




Accessories (filters, honeycomb grid...)



Spotlight body



Square or round decorative
metal plate according to version



All the modifications and connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS

Last update: 2025.04.08

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE